

KVG-DWJ Series 80W

Whole Family: KVG-XX080-DWJ (XX=12/24/48VDC) [30W 60W 80W 96W 100W 120W 150W 200W 300W 500W 600W]



Class 2 TYPE HL SELV RoHS



Features

Output:	Constant Voltage
Range:	100-277VAC
PFC design:	Built-in active PFC function
Efficiency:	Up to 88%
Protections:	Short circuit / Over load / Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	Driver built-in Junction box, for dry, damp and wet locations.
Dimming function:	<u>Phase dimming</u> : work with Forward phase, MLV and Reverse phase, ELV, TRIAC dimmers. <u>0-10V dimming</u> : 0-10V/1-10V/Potentiometer/10V PWM 4 in 1.
Dimming range:	0-100% dimming depth 0.1%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	PWM output, High power factor PF>0.9, Flicker-free dimming

TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W
Specification

Model		KVG-12080-DWJ	KVG-24080-DWJ	KVG-48080-DWJ
Certificate		UL / cUL / FCC / Class 2 (24V&48V) / TYPE HL / SELV / RoHS		
Output	DC Voltage	12V	24V	48V
	Voltage Tolerance	±0.5V		±1V
	Voltage Regulation	±0.5%		
	Rated current	6.67A	3.33A	1.67A
	Rated power	80W		
	Load Regulation	±2%	±1%	
Input	Voltage Range	100-277VAC		
	Frequency Range	50 / 60Hz		
	Power Factor @ full load	>0.9		
	THD(Typ.) @ full load	<20%@120VAC & 277VAC		
	Efficiency @ full load	≥83%@120VAC	≥84%@120VAC	≥85%@120VAC
		≥84%@277VAC	≥85%@277VAC	≥87%@277VAC
	AC Current (Max.)	1.15A		
	Inrush Current (Typ.)	20A, 1.6ms @50% 120VAC	25A, 1.2ms @50% 277VAC	
Leakage current	<0.5mA			
Protection	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition removed.		
	Over Load	105%~110% shut down o/p voltage, re-power on to recover after fault condition removed.		
	Over temperature	Shell surface temp.100°C±10°C shut down o/p voltage, automatically recover after cooling.		
Environment	Working TEMP.	-40~+45°C (see below derating curve)		
	Working Humidity	20 - 95%RH non-condensing		
	Storage TEM.,Humidity	-40 - +80°C,10 - 95% RH non-condensing		
	TEMP.coefficient	±0.03%/°C(0 - 50°C)		
	Vibration	10~500Hz, 5G 12min./1 cycle, period for 72min. each along X,Y,Z axes		
Safety & EMC	Safety standards	UL8750; CAN/CSA-C22.2 No. 250.13		
	Withstand voltage	I/P-O/P: 1.88KVAC I/P-FG: 1.88KVAC O/P-FG:0.5KVAC		
	Isolation resistance	I/P-O/P: 100MΩ/ 500VDC/ 25°C/ 70% RH		
	EMC Immunity	FCC/ICES do not request this test.		
	EMC Emission	FCC 47 CFR Part 15, Subpart B		
Others	Net Weight	1.37Kg		
	Dimension	220*95.4*43.8mm(L*W*H)		
	Packing	298*265*220mm 10pcs/CTN		
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation.			

TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W

MCB recommendation




When the input voltage is 120Vac, the number of LED Driver matched by circuit breakers is as follows:		
MCB Type	Level	The number of LED Driver
C type	10A	8
	13A	10
	16A	13
	20A	16
	25A	18
When the input voltage is 277Vac, the number of LED Driver matched by circuit breakers is as follows:		
MCB Type	Level	The number of LED Driver
C type	10A	6
	13A	8
	16A	10
	20A	13
	25A	15

Note:

1. The above quantities of the led drivers connected on the Type C is recommended base on the maximum ambient temperature is 50 °C.
2. The breaker should be selected according to the input rated voltage, input rated current, ambient temperature, and trip characteristic curve.




TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W

Efficiency Curve (efficiency vs output load)

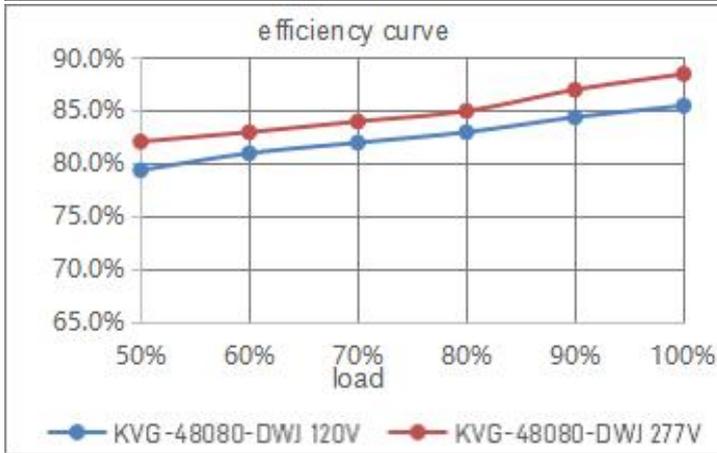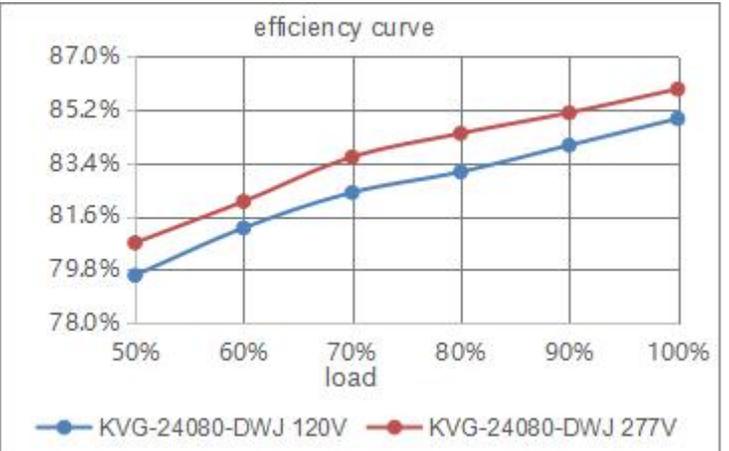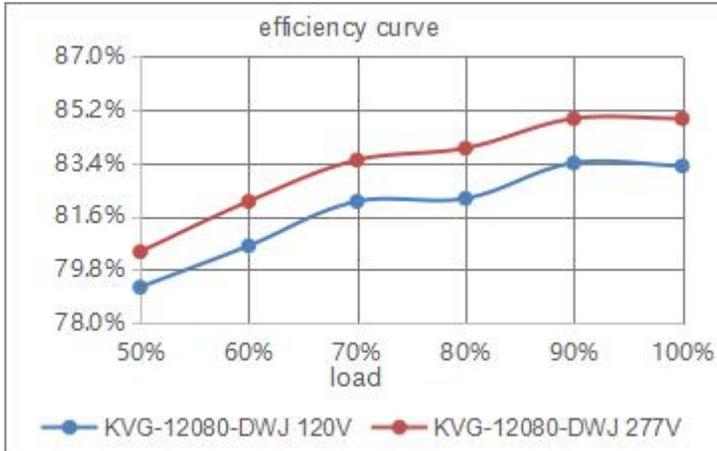


TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W

Power Factor Curve (power factor vs output load)

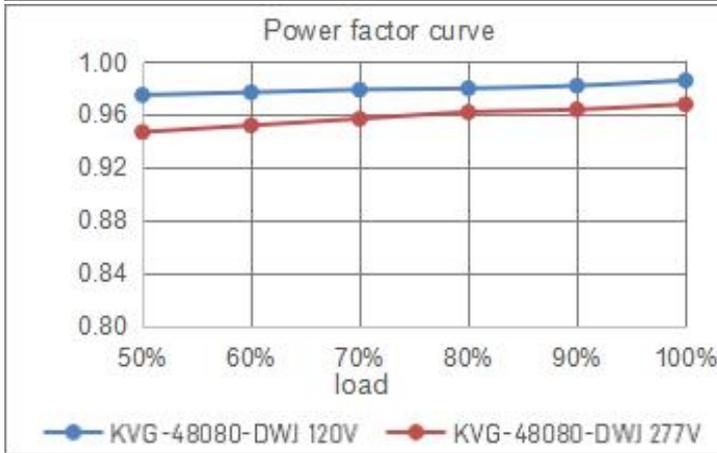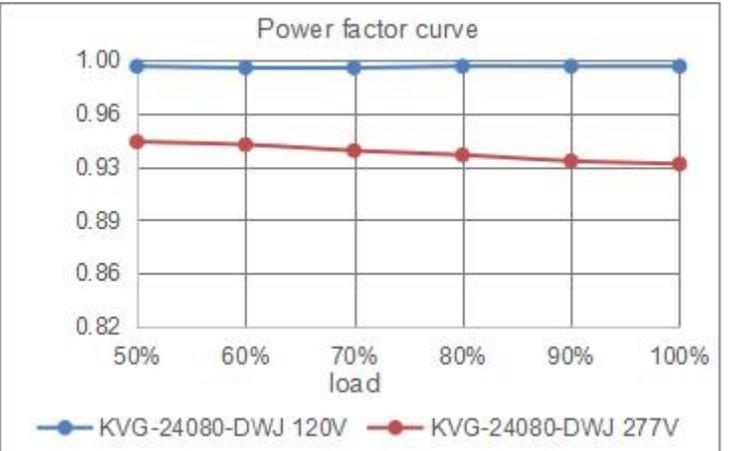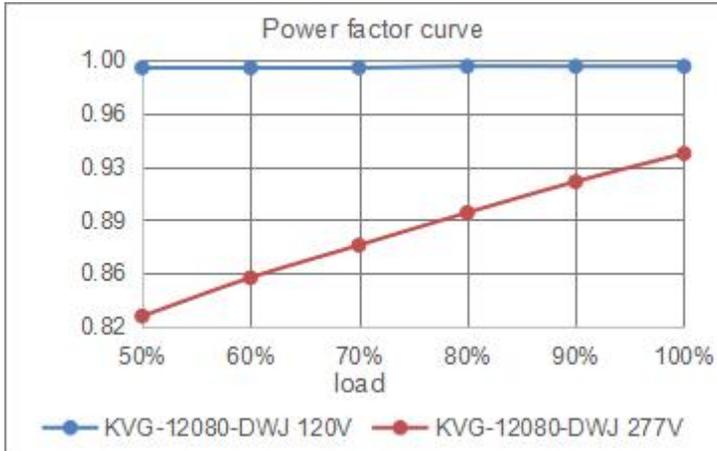


Derating Curve (output load vs TEMP.)

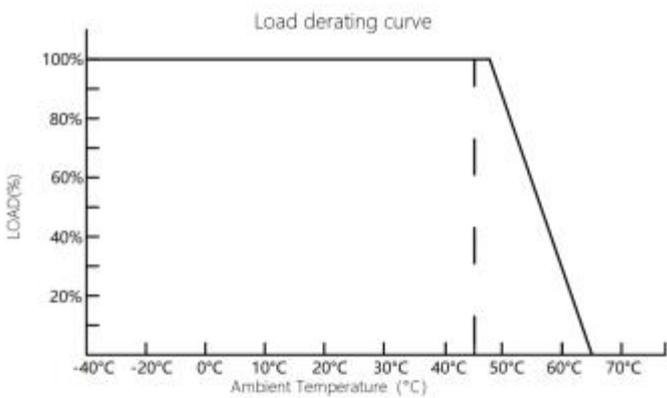

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. Please note that the rise in temperature of LED fixtures over a long period of time will cause their power to rise. Therefore, we recommend the power supply to reserve a certain amount of load to avoid overloading.

TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W

Mechanical Specification

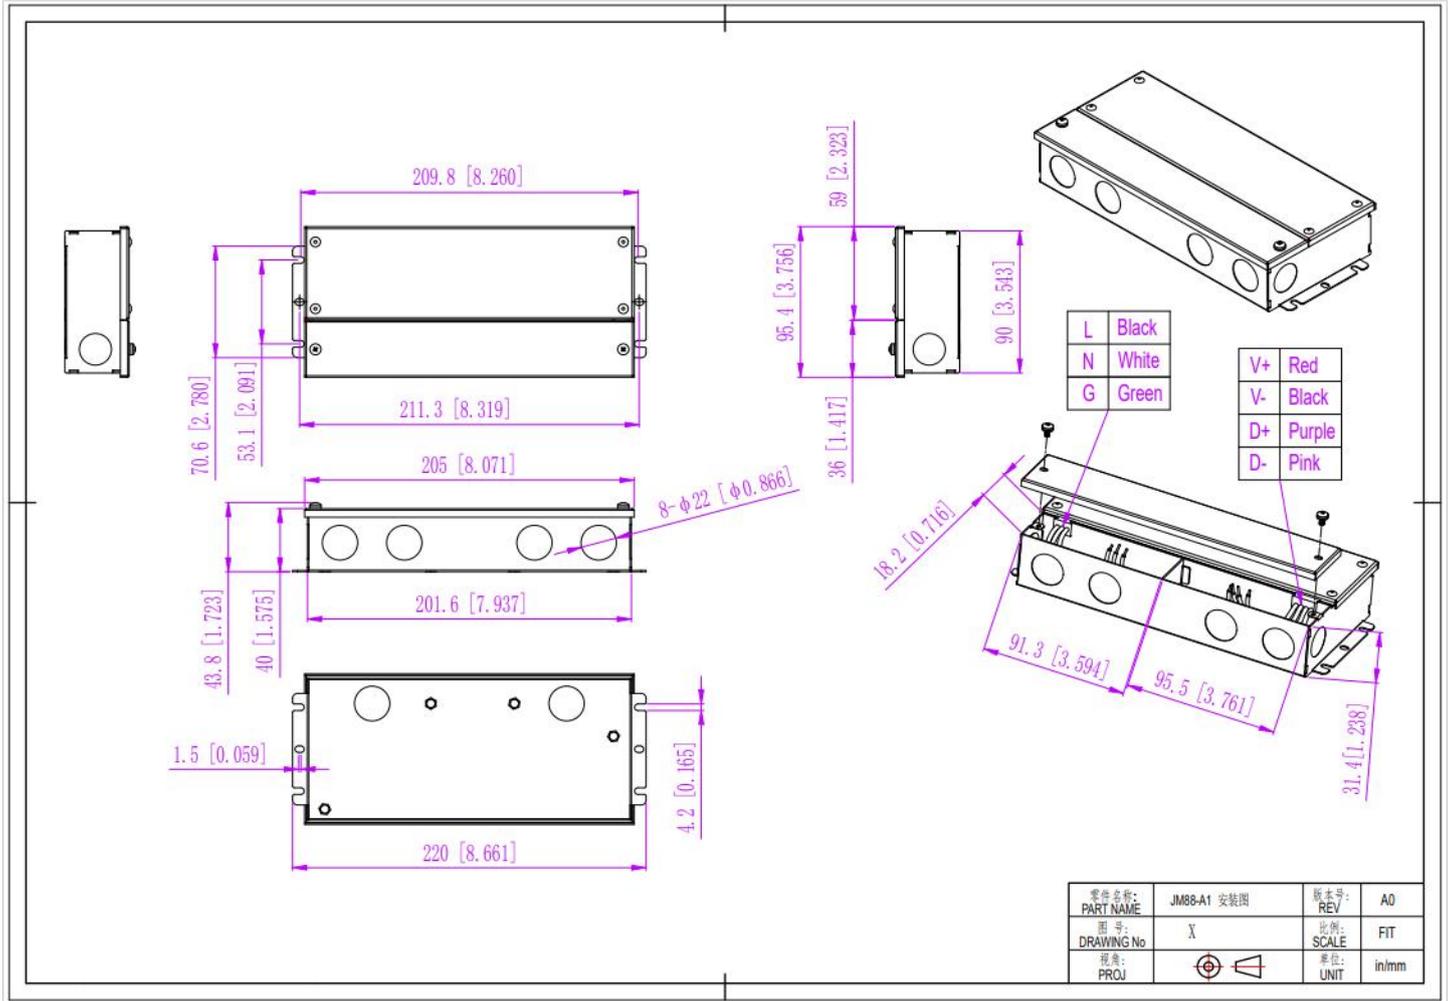

12V&24V&48V Version

American wire gauge	
JM88-A1	
Input wire	Black(L) White(N) Green(G) (3*18AWG)
Output wire	Red(V+) Black(V-) (2*16AWG)
Dimming wire	Purple(DIM+) Pink(DIM-) (2*18AWG)


Warm tips:

- Recommended Max. Carrying Current (A) = wire diameter(mm²) x 10A/mm²
For example: 1mm² output cable, Recommended Max. Carrying Current (A) = 1mm² x 10A/mm² = 10A
- Any other requests for cable, we can customize.

TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W


Dimming Operation and Connecting Diagram

- **Using two ways of dimming at the same time**, you must be assured that LED lighting is up to the max. Brightness then you could operate with the other dimming;

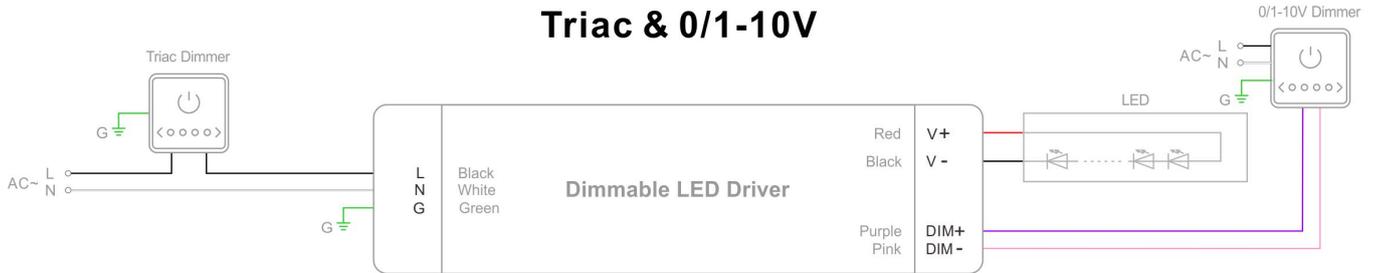




- **Using one dimming ---TRIAC/Phase cut dimming**

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer or lighting system.
2. Working with Forward phase, MLV and Reverse phase , ELV, TRIAC dimmers or light system.
3. Min. loading is about 10%.
4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

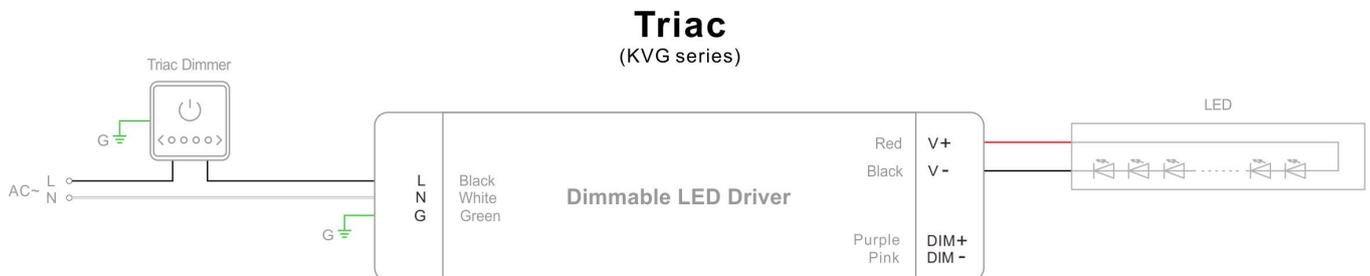

TRIAC & 0-10V Dimmable LED Driver - Constant Voltage Output - KVG-DWJ Series 80W

● **Using one dimming ---0-10/ 1-10V/ 10V PWM/ Potentiometer dimming**

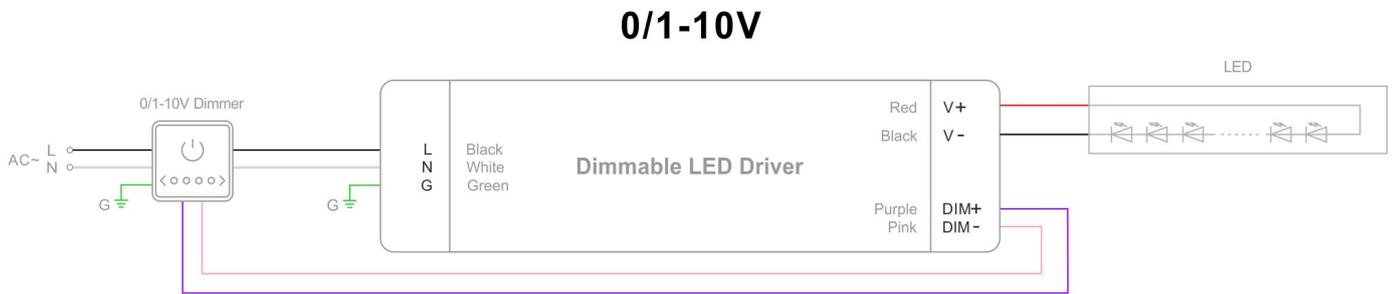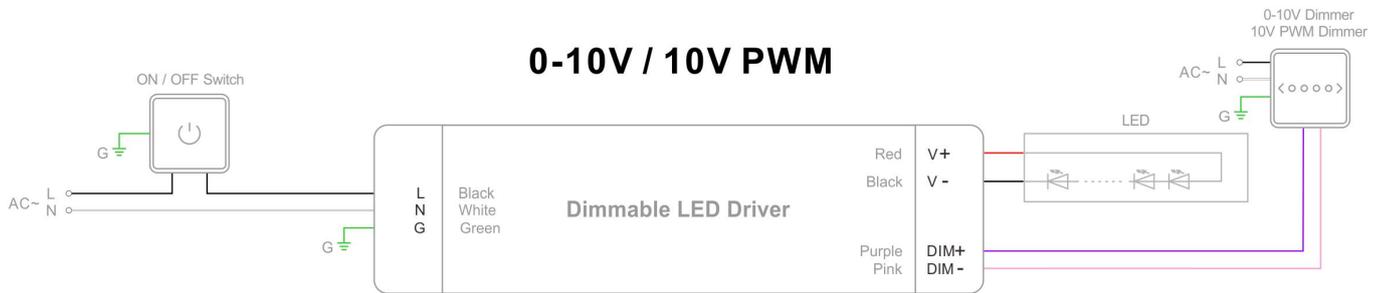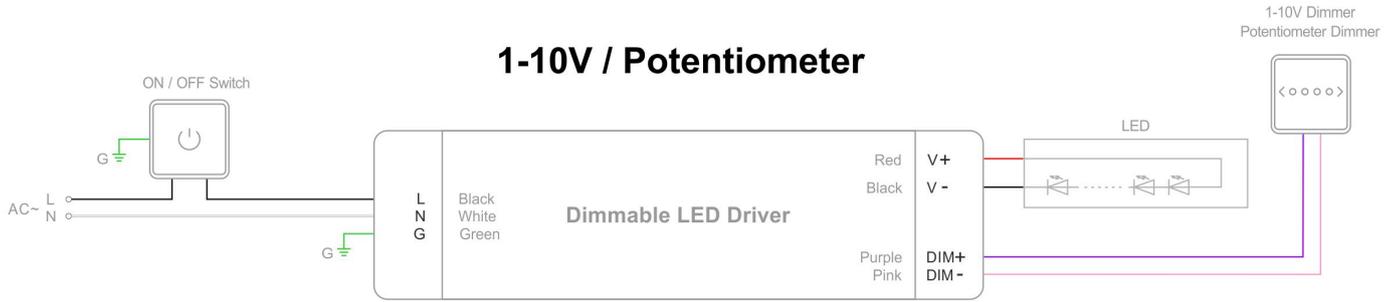

Instructions

1. This driver should be installed by qualified and professional person.
2. Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that wiring is correct before test in order to avoid light and power supply damage.
4. If driver Cannot work normally, don't maintain privately.