LED ALUMINUM EXTRUSION

NUORDIC
Lighting Company

www.nuordic.com

PRODUCT CATALOG

Home Lighting

Surface Mounted Series 30
Recessed Series 129
Angular Mounting Series 168
Lens Series 189
Magnetic Installation Series 198
Waterproof Series 210
Cabinet Series 216

Architectural Lighting

Floor Series 231
Outside Corner and Inside corner Series 243
Skirting Series 251
Bendable Plaster In Series 257
Plastenin Serfes 270
Architectural Wall Washing Series 305

Office Commercial Lighting

Recessed,Surface Mounted,Suspending ,Linear Light Prof ile 343
Bending Series 451

Surface Mounted Series


L430
P30


L144B
P31


L063B
P32


L107
P33



L649
P34


L368
P35


L214A
P36


L214B
P37


L214C
P38


L919
P39


L137B
P40


L356
P41


L360B
P42


L367B
P43


L124
P44


L047B
P45


L138B
P46


L302
P47



L918
P48


L140B
P49


L582
P50


L006
P51


L227
P52


L143B
P53


L141B
P54


L027
P55


L027B
P56


L027C
P57


L007
P58


L071
P59


L071C
P60


L026
P61


L026C
P62


L191
P63



L692
P64


L347
P65



L920
P66



L921
P67


L037
P68


L048
P69

L136
P70

L038
P71

L061
P72

L221
P73

L109
P74

L011B
P75

L017
P76

L025B
P77

L085
P78

L916
P79

L001
P80

L052
P81

L370
P82

L372
P83

L369
P84

L654
P85

L657
P86

L230
P87

L266
P88

L096A
P89

L096B
P90

L096C
P91

L097A
P92

L097B
P93

L097C
P94

L229A
P95

L229B
P96

L229C
P97

L298
P98

L802
P99

L505
P100

L432
P101


L091A
P102


L091B
P103


L091C
P104


L091D
P105


L154
P106


L035
P107


L473
P108


L151
P109


L095
P110


L334
P111


L150
P112


L310
P113


L296
P114


L293B
P115


L155A
P116


L155B
P117


L155C
P118


L133
P119


L265
P120


L243
P121


L769
P122


L309
P123


L927
P124


PL264
P125


L224
P126


L225
P127


L226
P128

Recessed Series


L690
P130


L145B
P131


L917
P132


L484
P133


L132B
P134


L139B
P135


L495
P136


L648
P137


L142B
P138


L041C
P139


L041
P140


L691
P141


L279
P142

L059
P143

L059C
P144

L089
P145

L584
P146

L922
P147

L101
P148

L212
P149

L057
P150

L021B
P151

L042B
P152

L656
P153

L371
P154

L655
P155

L506
P156

L466
P157

L474
P158

L152
P159

L273
P160

L094
P161

L341
P162

L294B
P163

L291
P164

L311
P165

L626
P166

PL265
P167

Angular Mounting Series

HOME LIGHTING


L228
P169


L534
P170


L486
P171


L054
P172


L054B
P173


L123
P174


L433
P175


L031
P176


L583
P177


L320
P178


L028
P179


L028C
P180


L297
P181


L431
P182


L513
P183


L090A
P184


L090B
P185


L053
P186


L053B
P187


L053C
P188

Lens Series

HOME LIGHTING


L386
P190


L233
P191


L037B
P192


L101B
P193


L038B
P194


L299D
P195


L096D
P196


L097D
P197

Magnetic Installation Series

HOME LIGHTING


L348
P199


L349
P200


L351
P201


L355A
P202


L355B
P203


L350
P204


L357
P205


L358
P206


L352
P207


L353
P208


L354
P209

Waterproof Series IP65

HOME LIGHTING


L146 IP65
P211

L147 IP65
P212

L148 IP65
P213

L149 IP65
P214

L153 IP65
P215

Cabinet Series

HOME LIGHTING


L553
P217


L554
P218


L555
P219


L585
P220


L588
P221


L592
P222


L586
P223


L590
P224


L489
P225


L514
P225


L487
P227


L232
P228


L496
P229


L312
P230

Floor Series

ARCHITECTURAL LIGHTING


L126B
P232


L093B
P233


L092B
P234


L213
P235



L726
P236



L727
P237



L725
P238



L728
P239


L189
P240



L729
P241


L518
P242

Outside Corner and Inside corner Series

ARCHITECTURAL LIGHTING


L198
P244


L199
P245


L201
P246


L658
P248


L519
P249


L529
P250

Skirting Series

ARCHITECTURAL LIGHTING


L530
P252


L531
P253



L835
P254


L512
P255


J001A-1
P256


J002-1
P256


J003-1
P256


J004-1
P256


J005A-1
P256

J006A-1
P256

Bendable Plaster In Series


L881
P259


L882
P259


L868
P260


L872
P260


L876
P261


L870
P262


L874
P262


L888
P263


L878
P263


L886
P264


L880
P264


L873
P265


L877
P265


L871
P266


L875
P266


L879
P267


L883
P268


L884
P268


L885
P269

Plastenin Serfes


L241
P271


L508
P272


L275
P273


L276B
P274


NEW
L659
P275


L200
P276


L549
P277


L307
P278


L157
P279


L303
P280


L340
P281


L190
P282


L314
P283


L606
P284


L550
P285


L507
P286


L240
P287


L156A
P288


L156B
P289


L156C
P290


PL081
P291

L548
P292

L305
P293

NEW
L928
P294

L547A
P295

L547B
P296

L239
P297

L678
P298

L238
P299

PL082
P300

PL084
P301

L306
P302

NEW
PL263
P303

PL083
P304

Architectural Wall Washing Series



L653 P306


L587 P307


L652 P308


L551A P309


L234 P310


L292 P311


L313 P312


L591 P313


L192 P314


L215 P315


L216 P316


L220 P317


L222 P318


L235 P319


L236 P320


L237 P321


L242 P322


L245 P323


L308 P324


L366 P325


L373 P326


L385 P327


L532 P328


L533 P329


L546 P330


L510 P331


L511 P332


L660 P333


L661 P334


L662 P335


L663 P336



L730 P337



L731 P338


L732 P339


L509 P340


PL200 P341


PL068 P342

Recessed/Surface Mounted/Suspending /Linear Light Profile

Width 30-43mm



PL245 P344



PL246 P344


L295 P345

PL723 P345

PL076 P346

L244 P347

L099 P347

PL005 P348

PL074 P348

PL088 P349

L098 P349

PL266 P350

PL066 P351

PL194 P351

PL250 P352

PL247 P352

PL186 P353

PL187 P354

PL063 P355

PL064 P356

PL065 P356

PL056 P357

PL168 P357

PL248 P358

Width 50-59mm



PL249
P358


PL002
P359


PL075
P359


PL103
P360


PL104
P360


PL010
P361


PL010U
P361


PL011
P362


PL011U
P362


PL135
P363


PL105
P363


PL050
P364


PL059
P364


PL058
P365


PL057(UGR<19)
P365


PL048
P366


PL004
P366


PL049
P367


PL107
P367


PL108
P368


PL109
P368


PL097
P369


PL110
P370


PL111
P370


PL060
P371


PL051
P371


PL125
P372


PL026
P375


PL027
P375


PL236
P376



PL243
P376


PL052
P377


PL106
P377


PL001
P378


PL112
P378



PL237
P379

Width 70-89mm


PL055
P379


PL054
P380


PL006
P380


PL012
P381

PL012U
P381

PL115
P382

PL117
P382

PL118
P383

PL119
P383

PL120
P384

PL121
P384

PL126
P385

PL028
P386

PL008
P386

PL114
P387

PL116
P387

PL238
P388

Width 90-94mm


PL003
P388


PL013
P389


PL013U
P389


PL062
P390


PL122
P390

Width 100-125mm


PL123
P391


PL124
P391


PL009
P392


PL239
P392


PL069
P393


PL113
P393

LED tube pendant light


PL173
P394


PL174
P394


HW-82
P395


PL071
P395


PL072
P396

Free combination products


PL185A
P397


PL185B
P398


PL185C
P399


PL185D
P400


PL185E
P401


PL185F
P402


PL185G
P403


PL101
P404


PL102
P405


PL160A
P408


PL160B
P409


PL160C
P410


PL160D
P411


PL160E
P412


PL160F
P413


PL161A
P417


PL161B
P418


PL161C
P419


PL201A
P420


PL201B
P421


PL201C
P422


PL201D
P423


PL188A
P425


PL188B
P426

PL189A
P427

PL189B
P428

PL190A
P429

PL190B
P430

PL162A
P432

PL162B
P433

PL162C
P434

Free combination products


PL162D
P435


PL162E
P436


PL162F
P437


PL162G
P438


PL163A
P442


PL163B
P443


PL163C
P444


PL163D
P445


PL163E
P446


PL163F
P447


PL163G
P448


PL163H
P449


PL163I
P450

BENDING SERIES


CL020
P453


CL021
P453


PL289
P453


PL270
P453


CL022
P453


PL272
P453


PL273
P453


CL023
P453


PL275
P453


CL027
P453


CL024
P453


CL025
P453


CL026
P453


CL002
P454


CL003
P454


CL004
P454


CL006
P454


CL010
P454


CL016
P454


CL005
P454


CL007
P454


CL011
P455


CL017
P455


CL012
P455


CL008
P455


CL009
P455


CL013
P455

CL018
P455

CL014
P455

CL015
P456

CL019
P456

L001 80
L006 51
L007 58
L011B 75
L017 76
L021B 151
L025B 77
L026 61
L026C 62
L027B 56
L027 55
L27C 57
L028 179
L028C 180
L031 176
L035 107
L037 68
L037B 192
L038 71
L038B 194
L041 140
L041C 139
L042B 152
L047B 45
L048 69
L052 81
L053 186
L053B 187
L053C 188
L054 172
L054B 173
L057 150
L059 143
L059C 144
L061 72
L063B 32
L071 59
L071C 60
L085 78
L089 145
L090A 184
L090B 185
L091A 102
L091B 103
L091C 104
L091D 105
L092B 234
L093 161
L094 157
L095 110
L096A 89
L096B 90
L096C 91
L096D 196
L097A 92
L097B 93
L097C 94
L097D 197
L098 349
L099 347
L101 148
L101B 193
L107 33
L109 74
L123 174
L124 44
L126B 232
L132B 134
L133 119
L136 70
L137B 40
L138B 46
L139B 135
L140B 49
L141B 54
L142B 138
L143B 53
L144B 31
L145B 131
L146 211
L147 212
L148 213
L149 214
L150 112
L151 109
L152 159
L153 215
L154 106
L155A 116
L155B 117
L155C 118
L156A 288
L156B 289
L156C 290
L157 279
L189 240
L190 282
L191 63
L192 314
L198 244
L199 245
L200 276
L201 246
L212 149
L213 235
L214A 36
L214B 37
L214C 38
L215 315
L216 316
L220 317
L221 73
L222 318
L224 126
L225 127
L226 128
L227 52
L228 169
L229A 95
L229B 96
L229C 97
L229D 195
L230 87
L232 228
L233 191
L234 310
L235 319
L236 320

L237 321
L238 299
L239 297
L240 287
L241 271
L242 322
L243 121
L244 347
L245 323
L265 120
L266 88
L273 160
L275 273
L279 142
L291 164
L292 311
L293B 115
L294B 163
L295 345
L296 114
L297 181
L298 98
L302 47
L303 280
L305 293
L306 302
L307 278
L308 324
L309 123
L310 113
L311 165
L312 230
L313 312
L314 283
L320 178
L334 111
L340 281
L341 162
L347 65
L348 199
L349 200
L350 204
L351 201
L352 207
L353 208
L354 209
L355A 202
L355B 203
L356 41
L357 205
L358 206
L360B 42
L366 325
L367B 43
L368 35
L369 84
L370 82
L371 154
L372 83
L373 326
L385 327
L386 190
L430 30
L431 182
L432 101
L433 175
L466 157
L473 108
L474 158
L484 133
L486 171
L487 227
L489 225
L495 136
L496 229
L505 100
L506 156
L507 286
L508 272
L509 340
L510 331
L511 332
L512 255
L513 183
L514 225
L518 248
L519 249
L529 250
L530 252
L531 253
L532 328
L533 329
L546 330
L547A 295
L547B 296
L548 292
L549 277
L550 285
L551A 309
L553 217
L554 218
L555 219
L582 50
L583 177
L584 146
L585 220
L586 223
L587 307
L588 221
L590 224
L591 313
L592 222
L606 284
L626 166
L648 137
L649 34
L652 308
L653 306
L654 85
L655 155
L656 153
L657 86
L658 248
L659 275

L660 333
L661 334
L662 335
L663 336
L678 298
L690 130
L691 141
L692 64
L723 345
L725 238
L726 236
L727 237
L728 239
L729 241
L730 337
L731 338
L732 339
L769 122
L802 99
L835 254
L868 260
L870 262
L871 266
L872 260
L874 262
L875 266
L876 261
L877 265
L878 263
L879 267
L880 264
L881 259
L882 259
L883 268
L884 268
L885 269
L886 264
L888 263
L916 79
L917 132
L918 48
L919 39
L920 166
L921 67
L922 147
L927 124
L928 294

HW-82 395

PL001 378
PL002 359
PL003 388
PL004 366
PL005 348
PL006 380
PL008 386
PL009 392
PL010 361
PL010U 361
Pl011 362
PL011U 362

PL012 381
PL012U 381
PL013 389
PL013U 389
PL026 375
PL027 375
PL028 386
Pl048 366
PL049 367
PL050 364
PL054 380
PL055 379
PL056 357
PL057 365
PL058 365
PL059 364
PL060 371
PL062 390
PL063 355
PL064 356
PL065 356
PL066 351
PL068 342
PL069 393
PL071 395
PL072 396
PL074 348
PL075 359
PL076 346
PL081 291
PL082 300
PL083 304
PL084 301
PL088 349
PL097 369
PL101 404
PL102 405
PL103 360
PL104 360
PL105 363
PL106 377
PL107 367
PL108 368
PL109 368
PL110 370
PL111 370
PL112 378
PL113 393
PL114 387
PL115 382
PL116 387
PL117 382
PL118 383
PL119 383
PL120 384
PL121 384
PL122 390
PL123 391
PL124 391
PL125 372
PL126 385

PL135 363
PL160A 408
PL160B 409
PL160C 410
PL160D 411
PL160E 412
PL160F 413
PL161A 417
PL161B 418
PL161C 419
PL162A 432
PL162B 433
PL162C 434
PL162D 435
PL162E 436
PL162F 437
PL162G 438
PL163A 442
PL163B 443
PL163C 444
PL163D 445
PL163E 446
PL163F 447
PL163G 448
PL163H 449
PL163I 450
PL173 394
PL174 394
PL185A 397
PL185B 398
PL185C 399
PL185D 400
PL185E 401
PL185F 402
PL185G 403
PL186 353
PL187 354
PL188A 425
PL188B 426
PL189A 427
PL189B 428
PL190A 429
PL190B 430
PL194 351
PL200 341
PL247 352
PL250 352
PL263 303
PL264 125
PL265 167
PL266 350
CL002 454
CL003 454
CL004 454
CL005 454
CL006 454
CL007 454
CL008 455
CL009 455
CL010 454
CL011 455
CL012 455
CL013 455
CL014 455
CL015 456
CL016 454
CL017 455
CL018 455
CL019 456
CL020 453
CL021 453
CL022 453
CL023 453
CL024 453
CL025 453
CL026 453
CL027 453
PL270 453
PL272 453
PL275 453
PL289 453
J001A-1 256
J002-1 256
J003-1 256
J004-1 256
J005A-1 256
J006A-1 256

PRODUCT SYSTEM

As a forerunner of linear lighting industry,BaiWei keeps expanding the definition and boundary of linear lighting. It explores and develops versatile product portfolios as listed below in the hope of providing comprehensive lighting solutions for residential, office, commercial scenarios and the like.

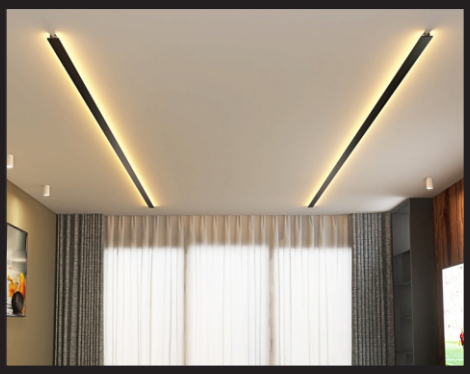

Surface Mounted Series...P30

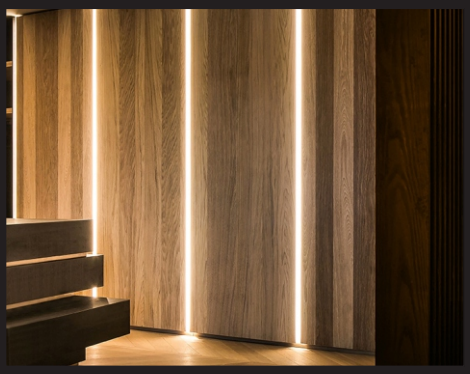

Recessed Series....P129



Angular Mounting Series...P168

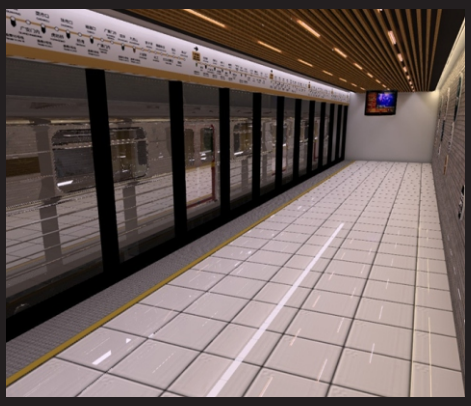

Lens Series...P189



Magnetic Installation Series....P198

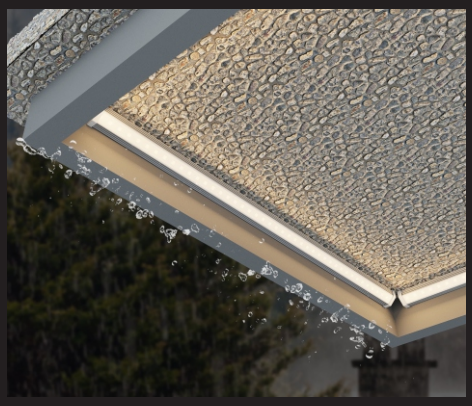

Waterproof Series...P210



Cabinet Series...P216



Floor Series...P241



OutsideCornerand Insidecorner Series...P243



Skirting Series.....P251



Bendable Plaster In Series....P257



PlasteninSerfes....P270

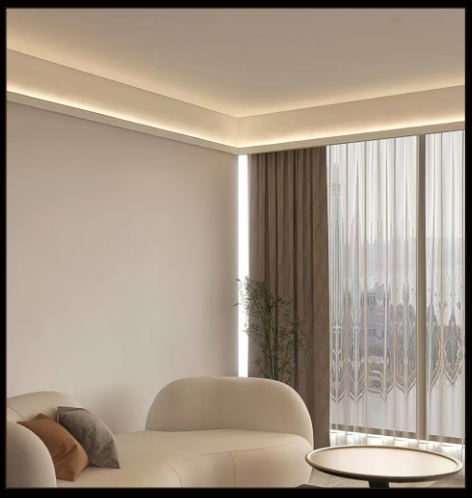

Architectural Wall Washing Series...P305



Recessed/Surface Mounted/Suspended/Linear Light Profile Series...P343



Bending Series...P451

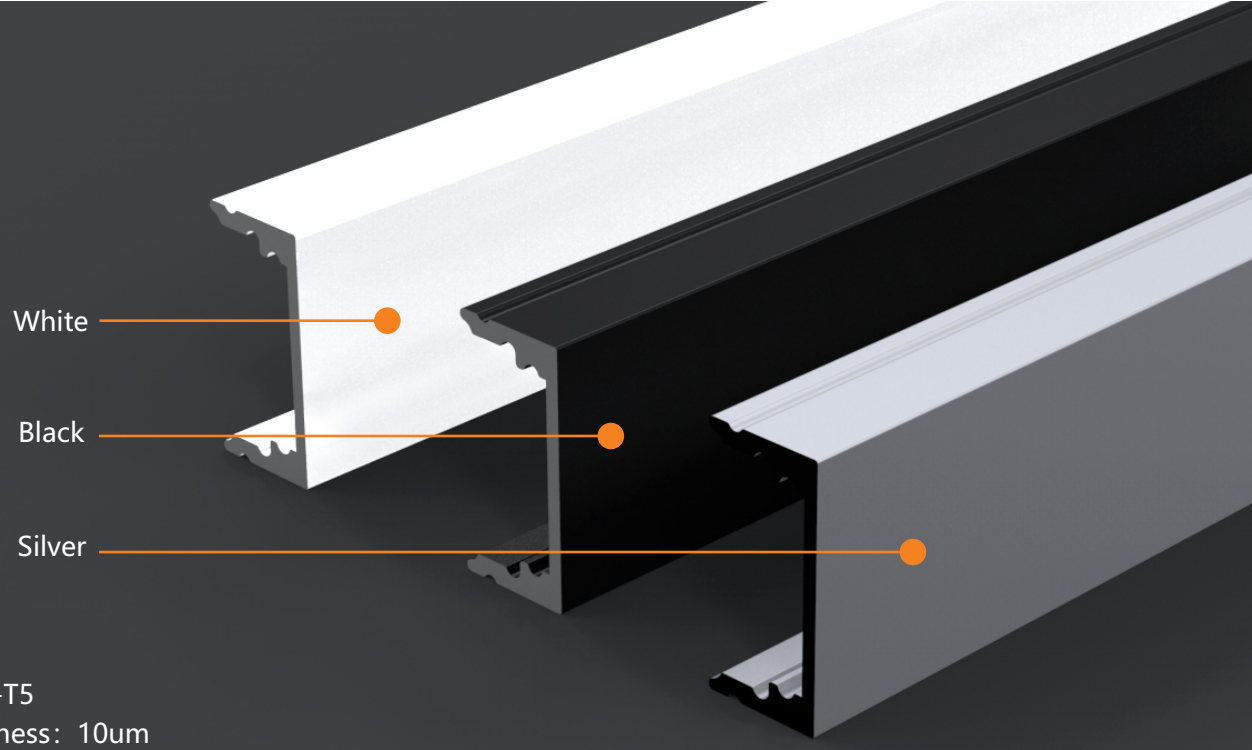

Material：6063-T5
Anodized Thickness：10um
Available Color:Conventional oxidized silver.Customized black/white and other colors

---

Customized Various Colors



Mold customization

DIFFUSER OPTIONS

-High impact PC/PMMA/Acrylic diffuser including PMMA black, opal, frosted and clear finish to suit most of our aluminum profiles.

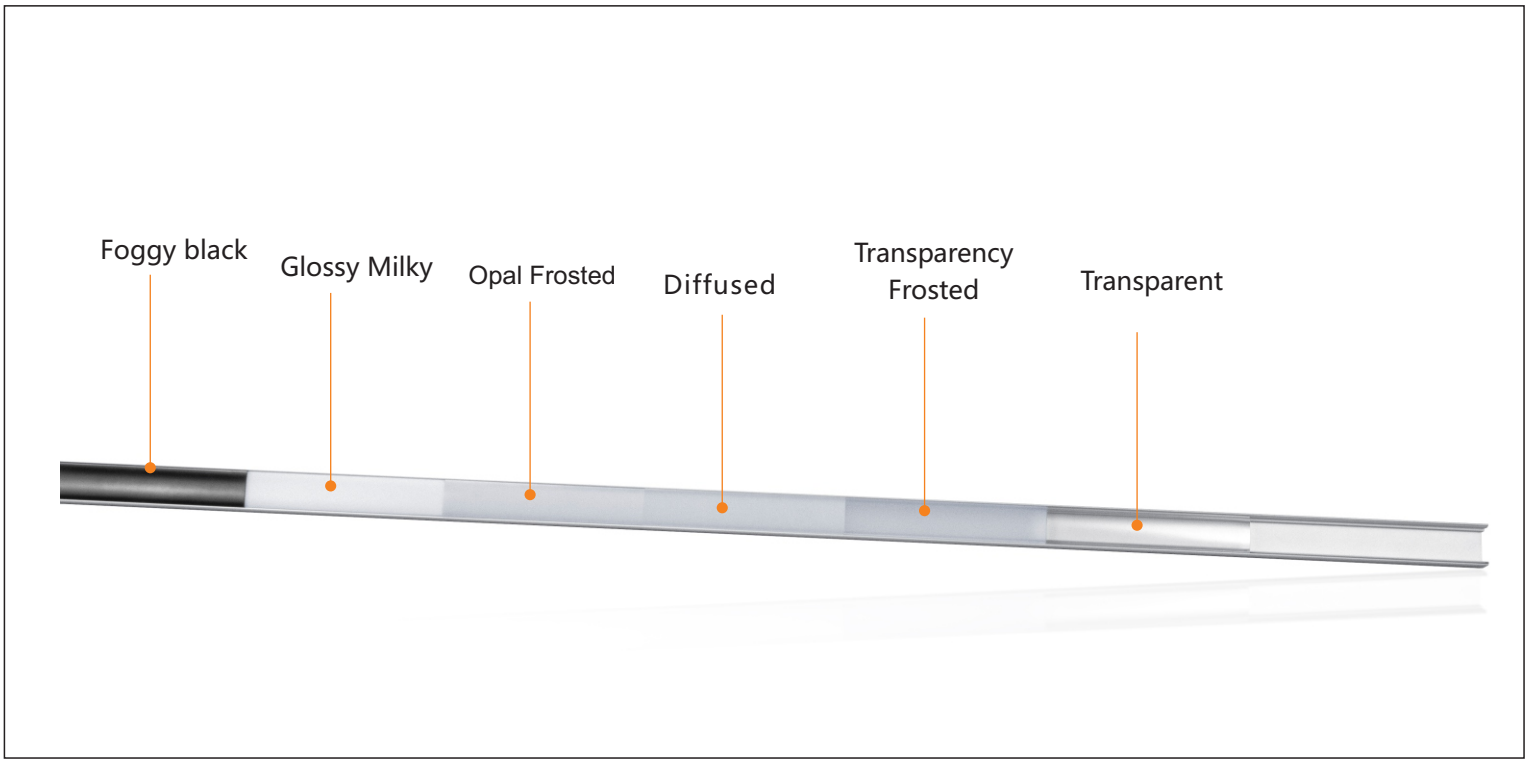

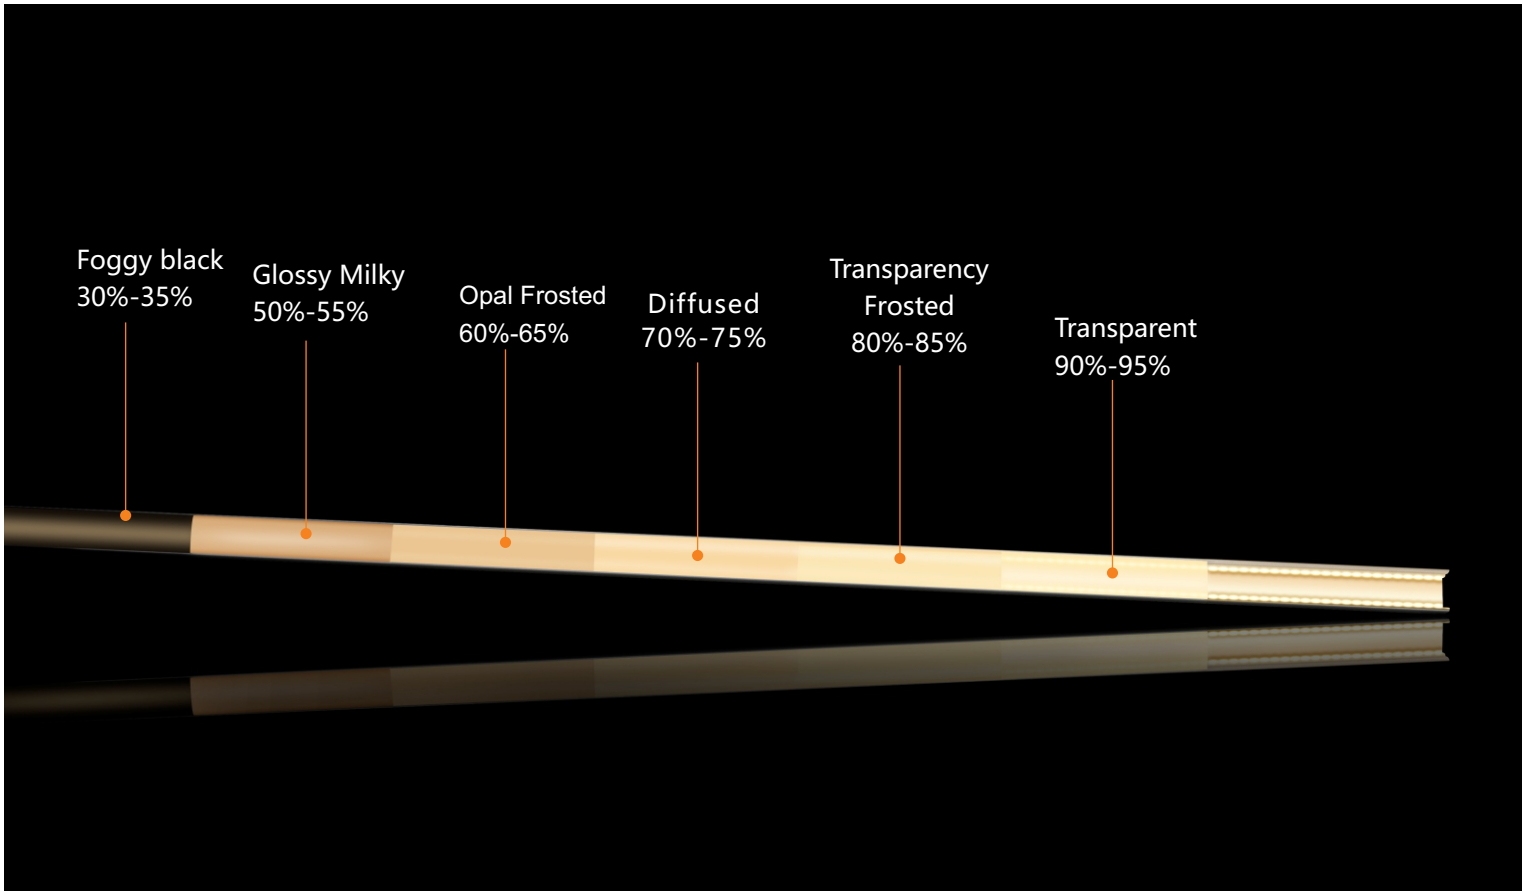


Transparent
Transparency
Frosted
Diffused
Opal Frosted
Glossy Milky
Foggy black

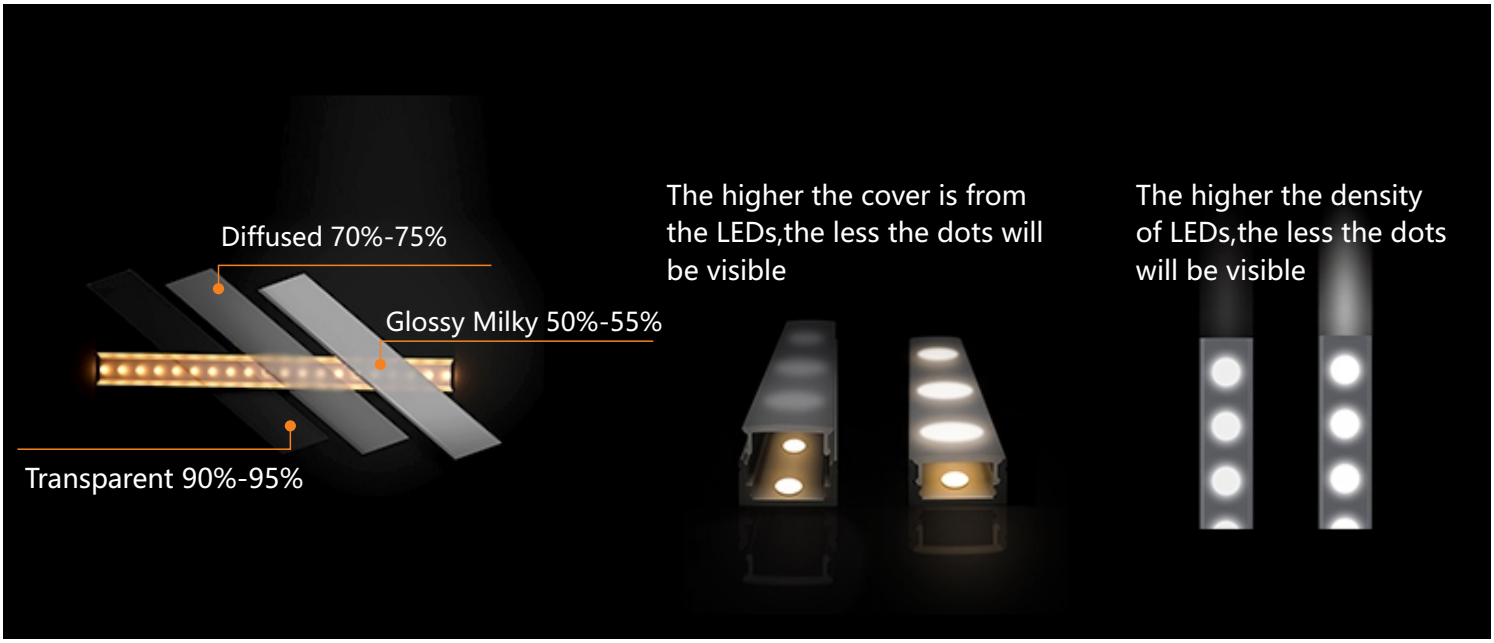
Diffused 70%-75%
Glossy Milky 50%-55%
Transparent 90%-95%
The higher the cover is from the LEDs,the less the dots will be visible
The higher the density of LEDs,the less the dots will be visible

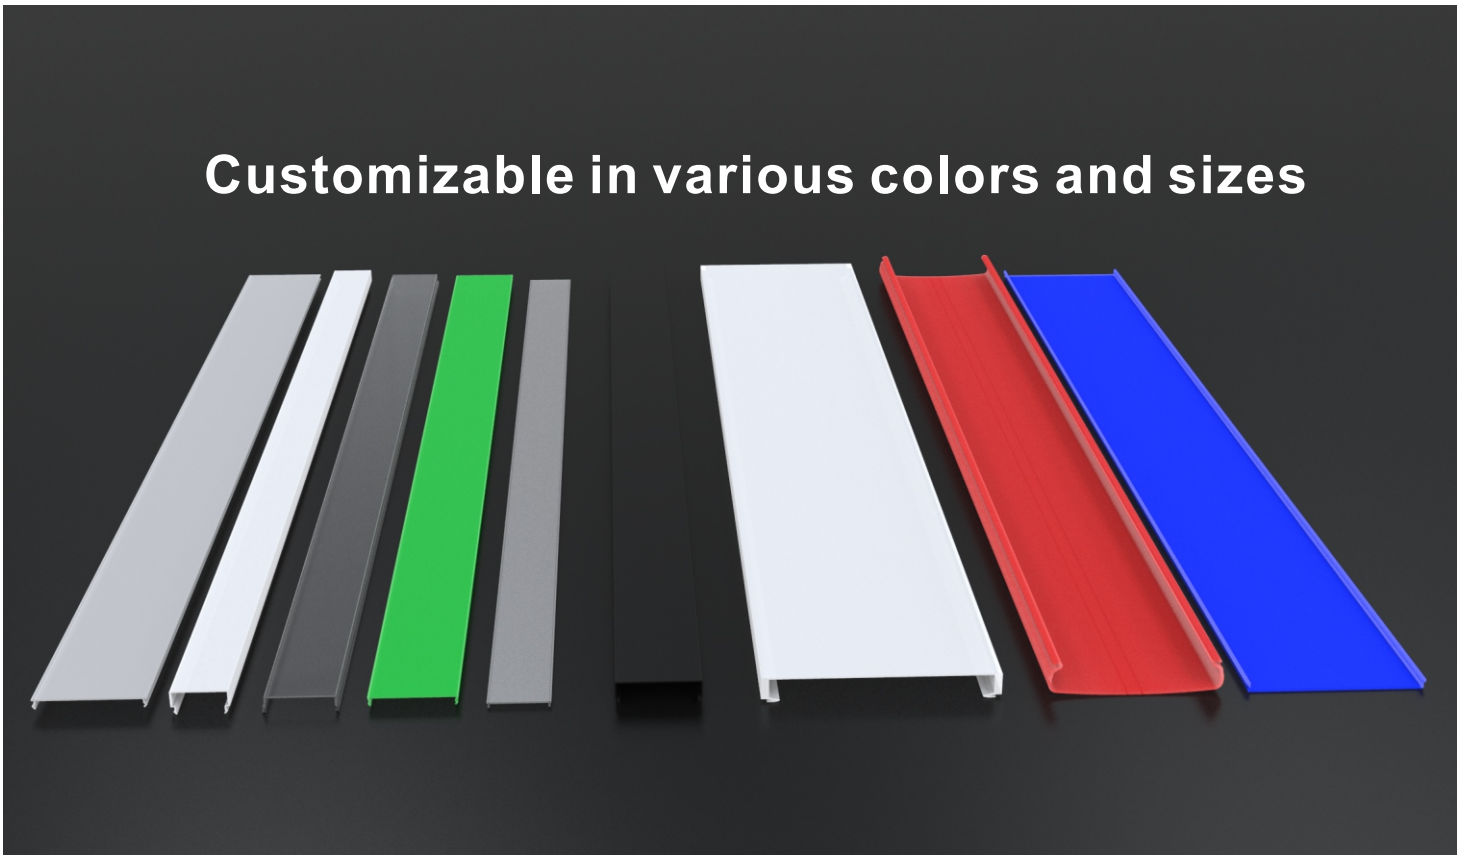

The lampshade can be customized with various patterns


BW001


BW002


BW003


BW005


BW006


BW007


BW008


BW009

LED ACCESSORIES-END CAPS

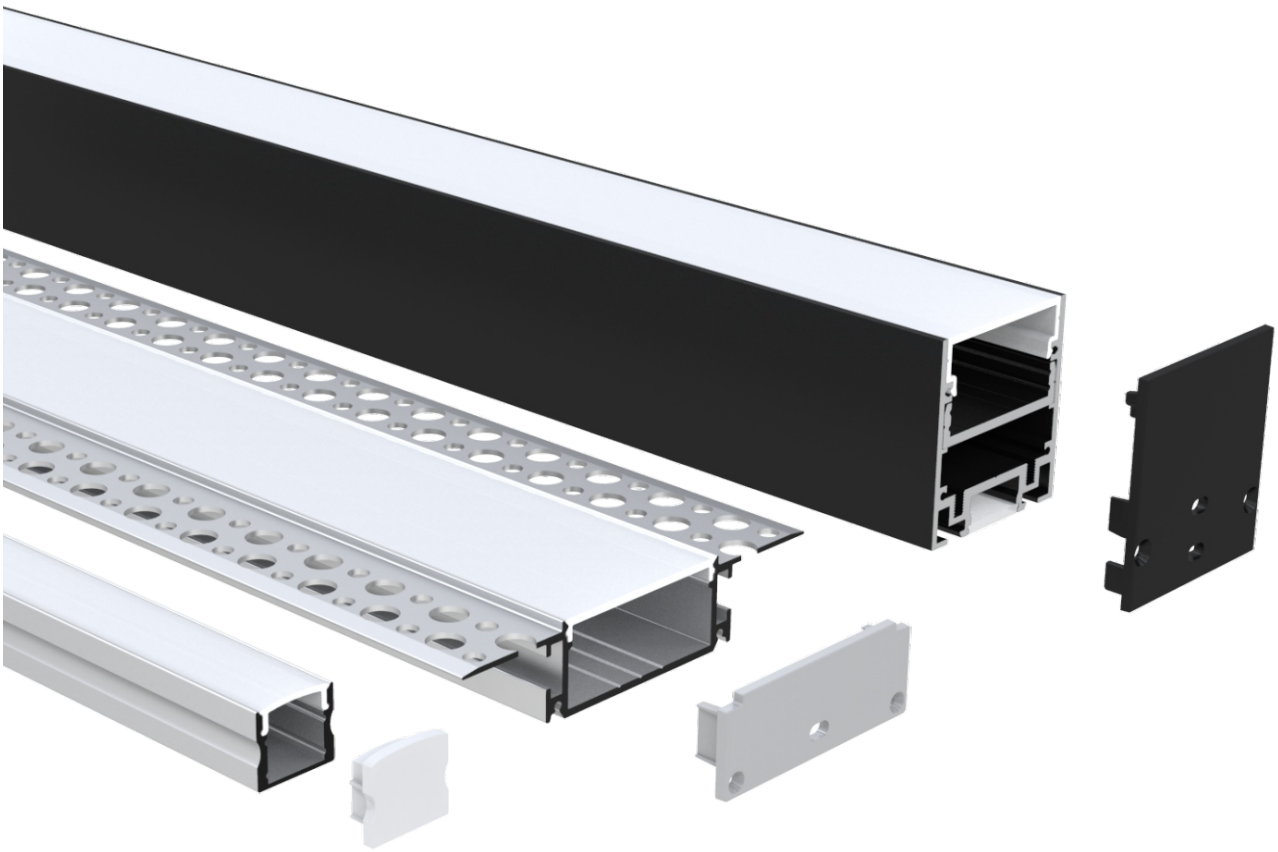



PC white



PC gray



PC black



Silver oxide



Oxidized black



Alu baking paint white

Other





































SNAP FITTING

Metallic mounting clips | Rotating Clips | Spring | PC Clips | Other



















JOINING CONNECTOR


90° B joing connector


157° joining connector


90° A joining connector


180° joining connector


90° B joing connector


90° joing connector


180° joining connector


90° A joining connector


90° joing connector


180° joining connector







ABOUT PACKAGING

❶ Conventional packaging methods



1. Bundle the covers in a certain quantity



2. Bundle aluminum materials in a certain quantity



3. Put the bundled aluminum materials into the cardboard box



4. Put the cover into the cardboard box as well



5.Seven layer thickened cardboard box outer packaging

❷ Labeling according to customer requirements, with each set of end caps and buckles packaged together

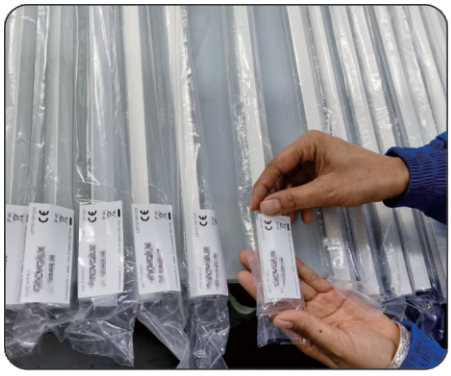

1.Putting client's label on each profile's bag



2.1pcs Aluminum+1pcs diffuser put in a PE bag
2pcs end cap+2pcs elips put in a small bag and attach to profile's bag



3.Bundle in a certain quantity



4.Every 50~70sets put in carton



5.Seven layer thickened cardboard box outer packaging

❸ Add protective cotton at both ends according to customer requirements



1. Bundle the covers in a certain quantity



2. Bundle aluminum materials in a certain quantity



3.Seven layer thickened cardboard box outer packaging

❹ Packaging in cartoon boxes according to customer requirements



1. One product, one inner cardboard box



2. Put the product into an inner cardboard box for inner packaging



3.Inner cardboard box packaging



4.Every 6pcs inner cartons put in a outer carton



5.Seven layer thickened cardboard box outer packaging

Reinforcement of outer packaging:



Paper corner protection packaging

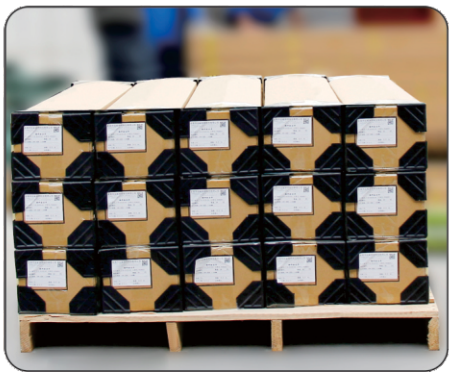

Packaging with plastic corner protectors



Packaging in wooden crates

Surface Mounted Series

Application











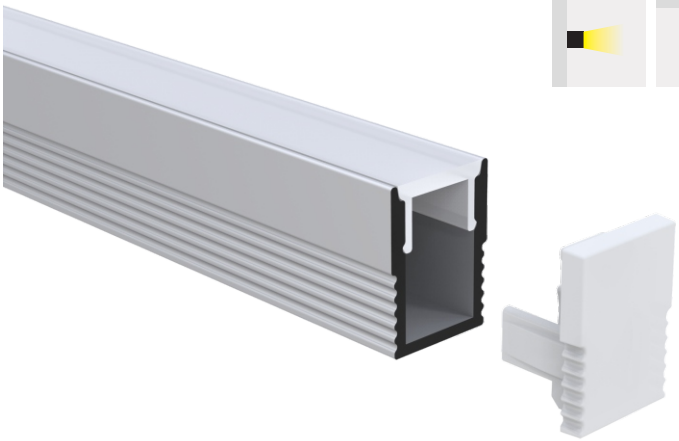

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

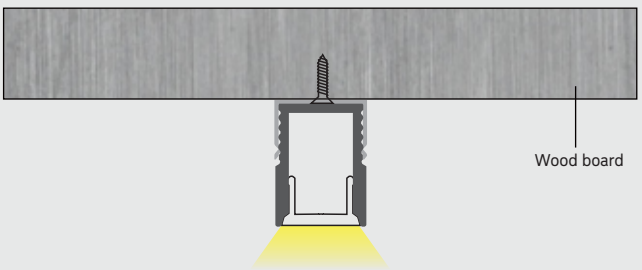

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

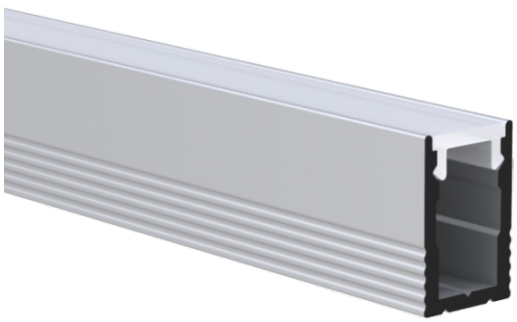

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/black/
Prismatic Frosted

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

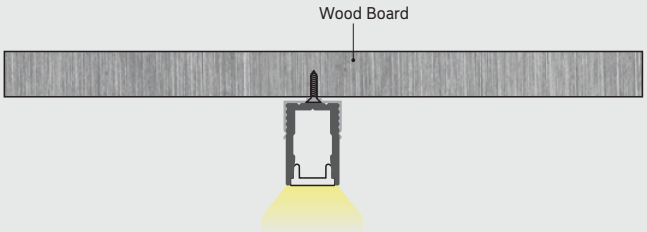

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

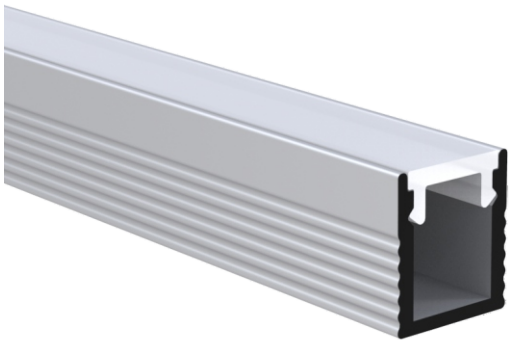

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/black/
Prismatic Frosted

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

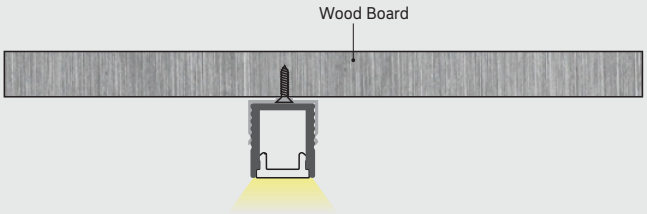

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

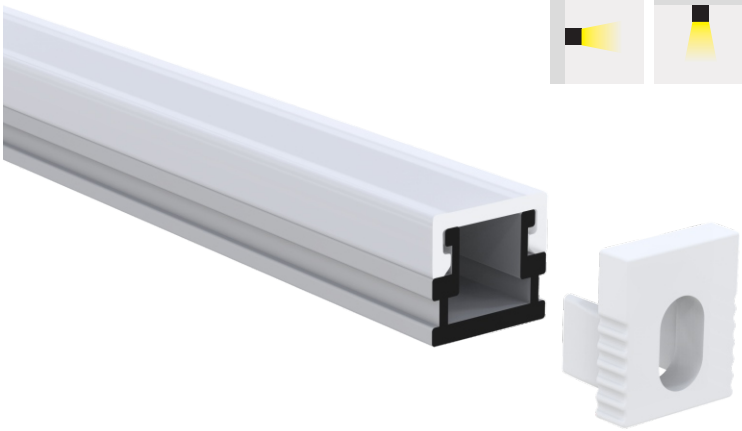

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

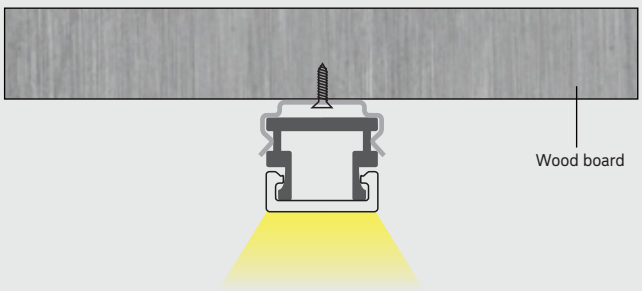

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

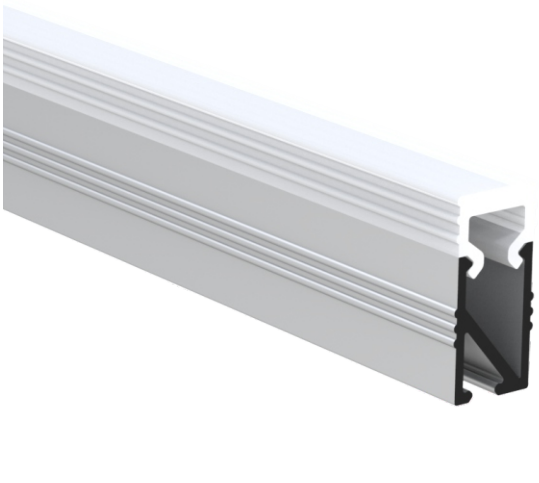

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

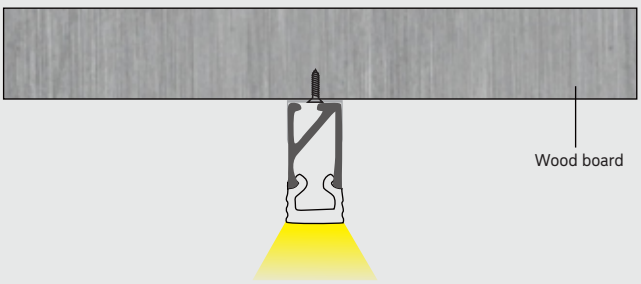

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

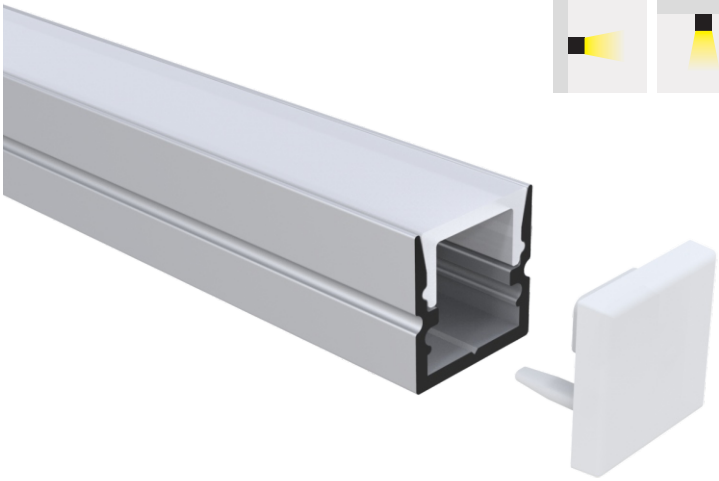

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

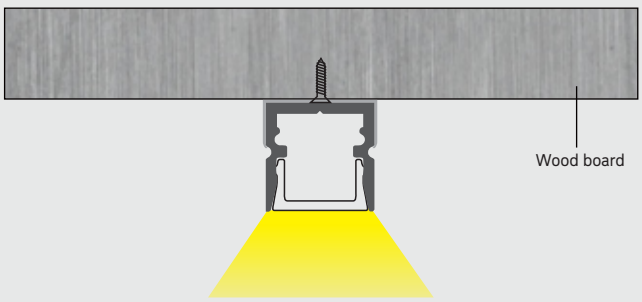

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

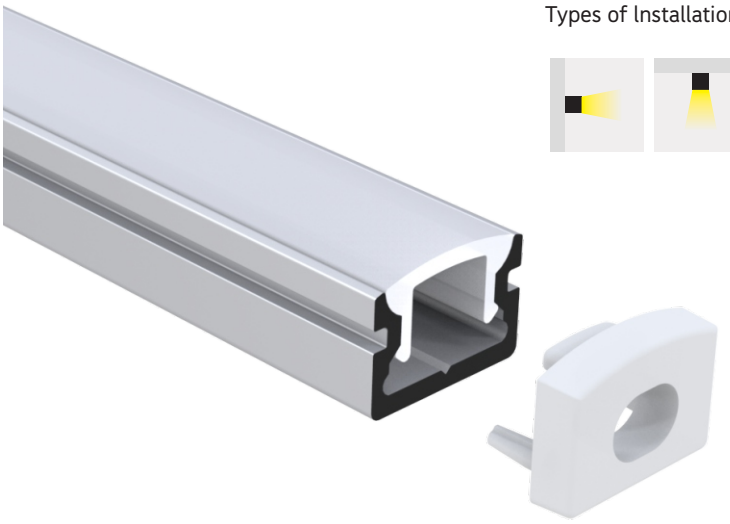

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

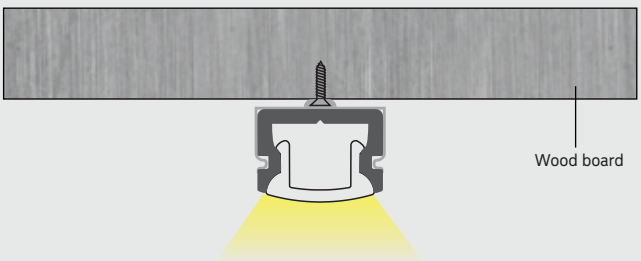

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



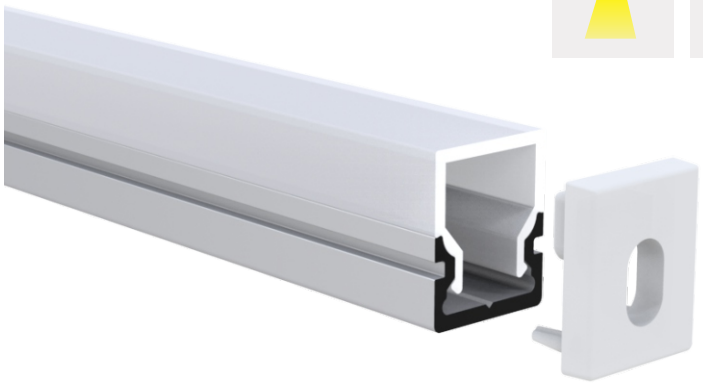



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

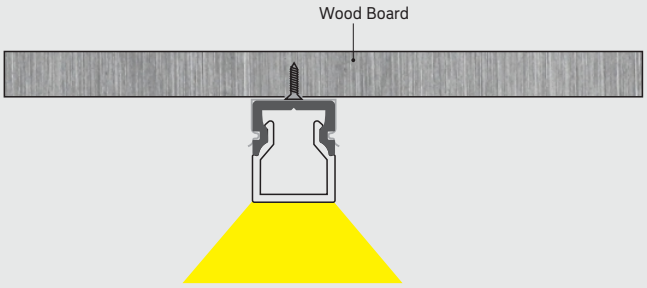

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



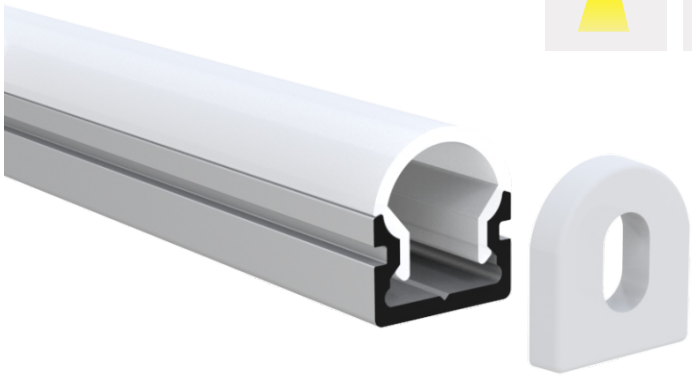



Profile color

- Black
- Silver
- White

Profile Components



PC
diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

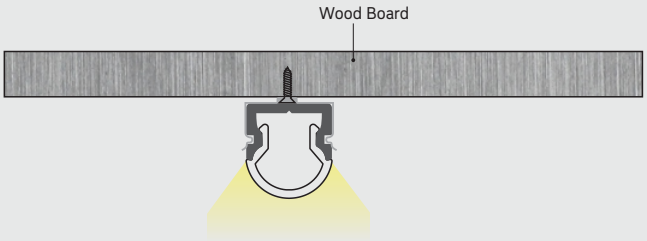

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



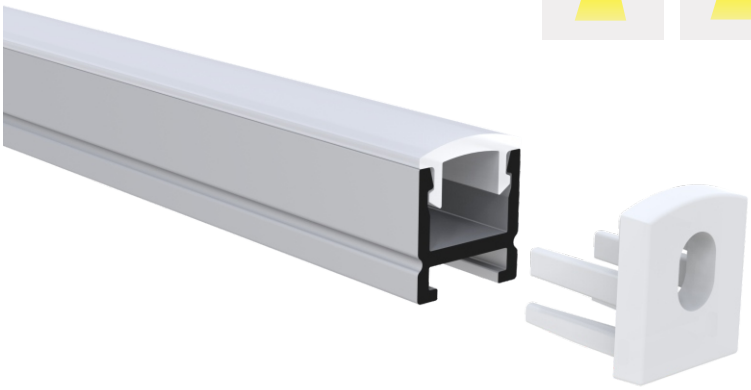



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black/

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip





90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Structure Image

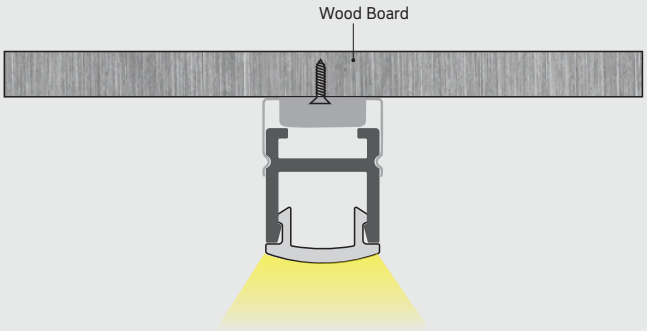

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:









Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/ black/
Prismatic Frosted



PMMA

diffused/opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

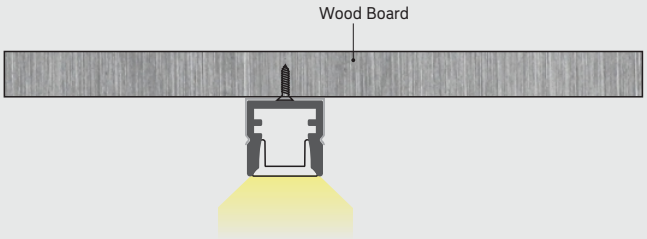

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installatlon:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

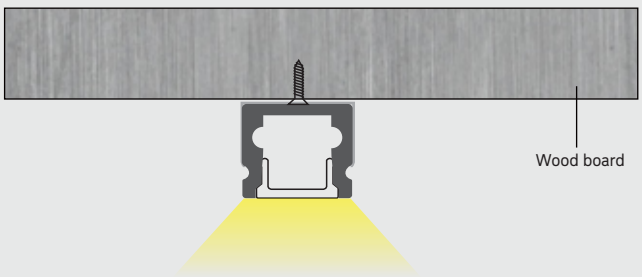

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-224-5MM	224LEDs	24V	14.4W/m	2160LM/m

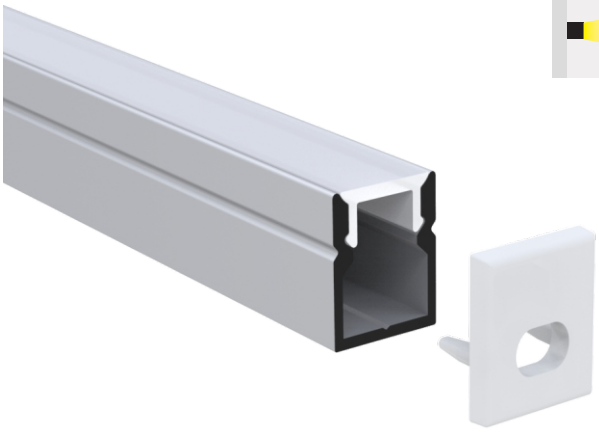

Types of Installatlon:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/
Prismatic Frosted



PMMA

opal matte/diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

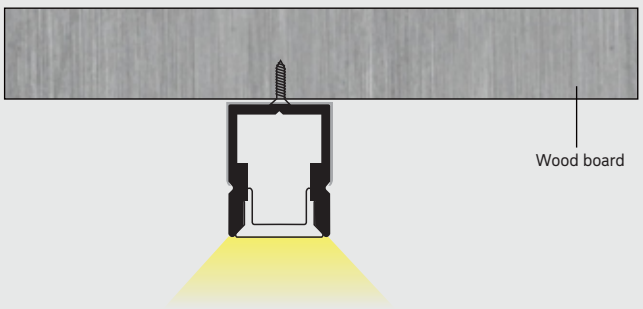

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-224-5MM	224LEDs	24V	14.4W/m	2160LM/m

Types of Installation:



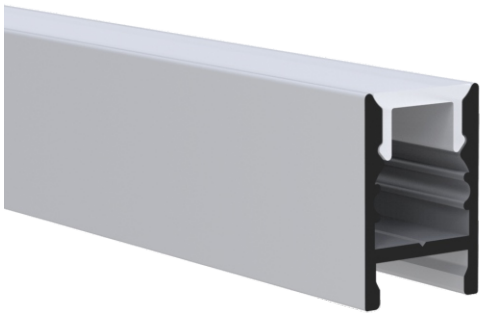





Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
black/Prismatic Frosted



PMMA

diffused/opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

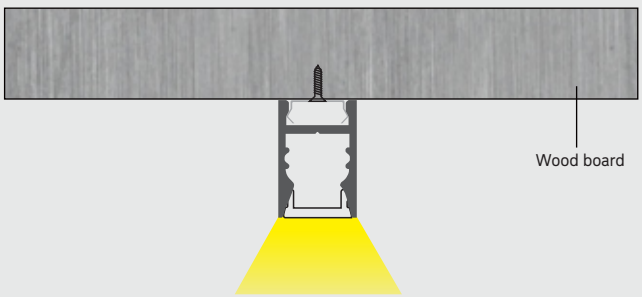

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

#Plastic Products

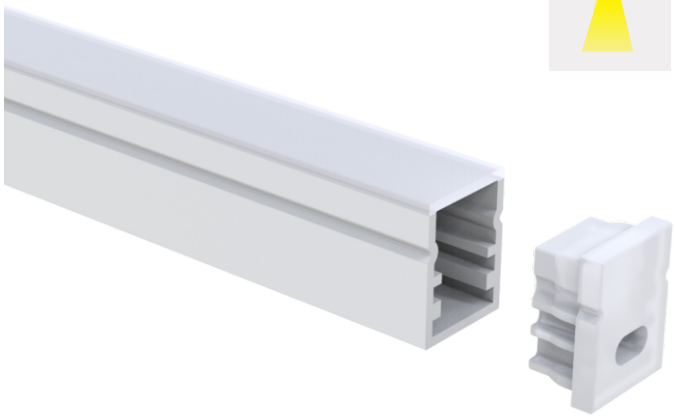

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	PC
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

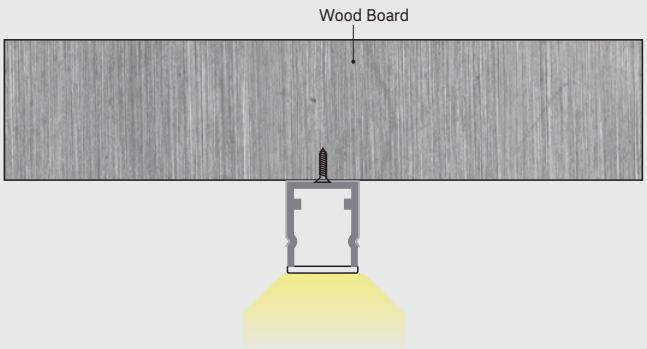

Types of Installation:



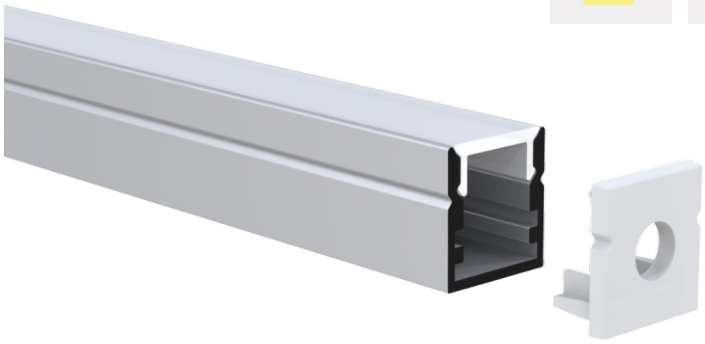



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/ black/
Prismatic Frosted



PMMA

diffused/opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

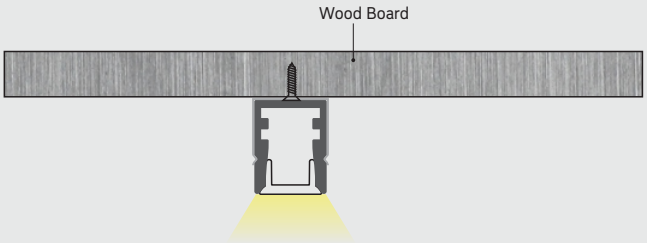

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	1300LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	1300LM/m

Types of Installation:



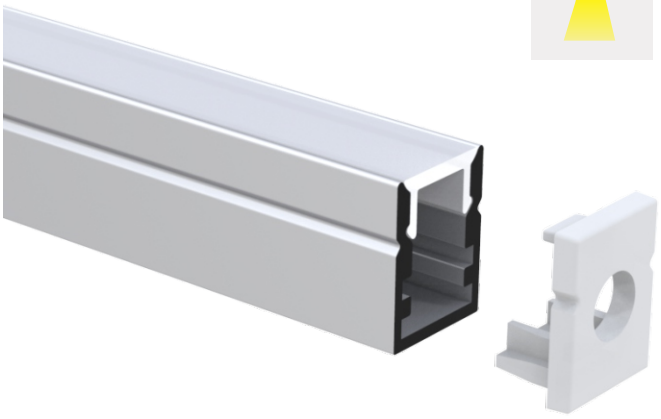



Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/clear



PMMA
diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

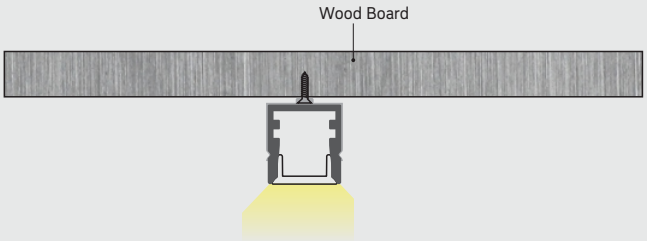

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	1300LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	1300LM/m

Types of Installation:



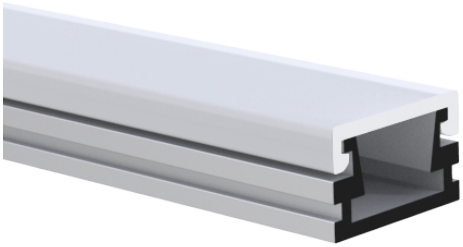





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

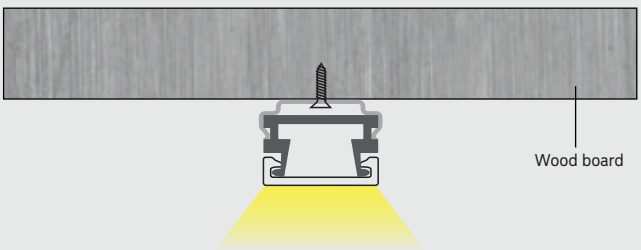

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



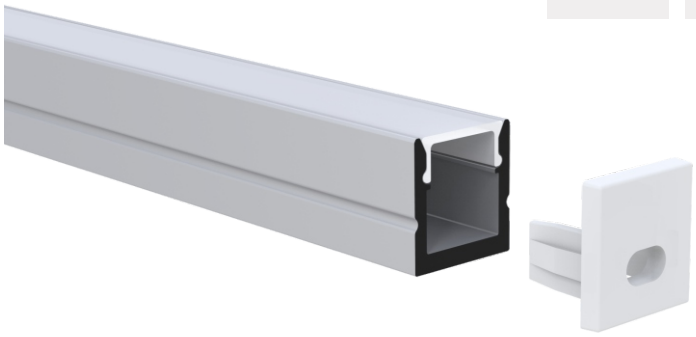



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black/

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

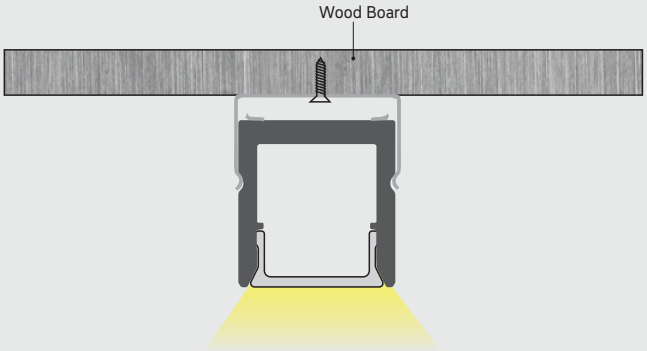

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:









Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/clear/black



PMMA
diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

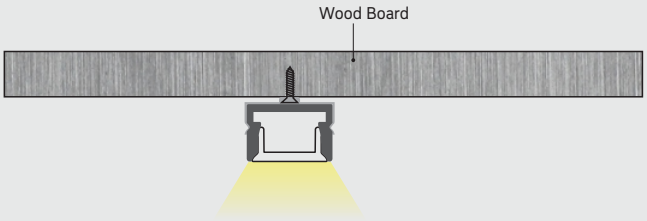

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

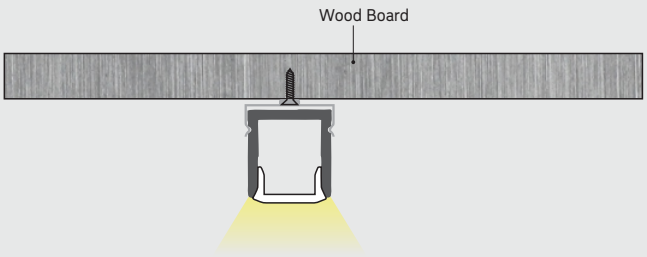

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:









Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

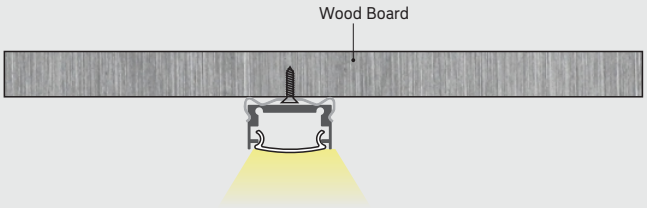

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

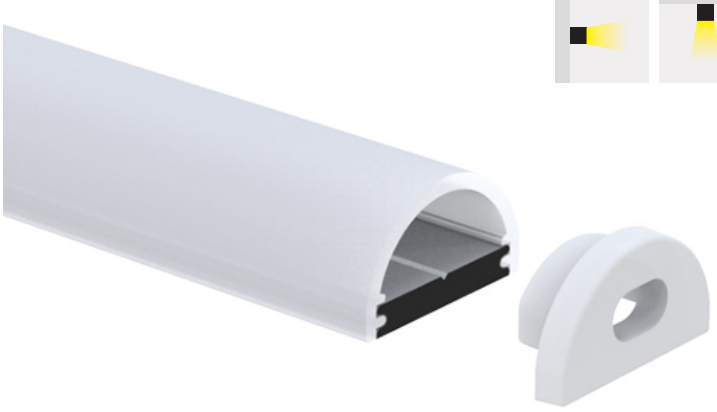

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

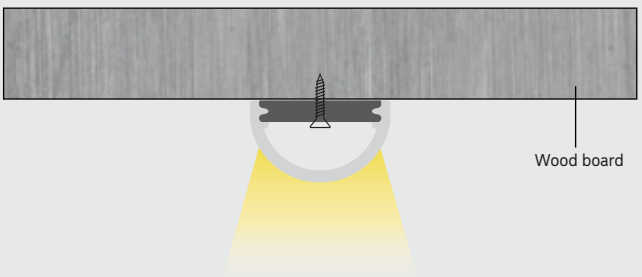

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

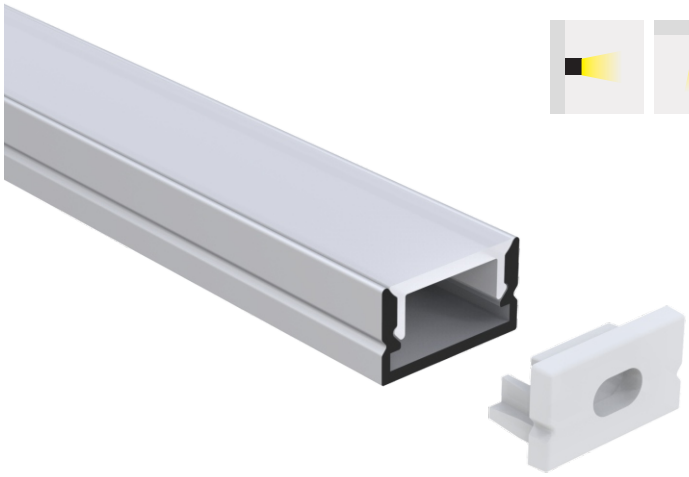

Types of Installation:

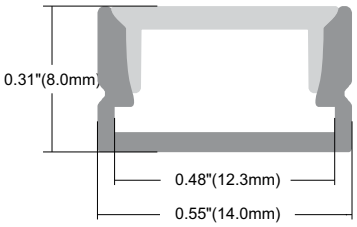

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black



PMMA

diffused

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

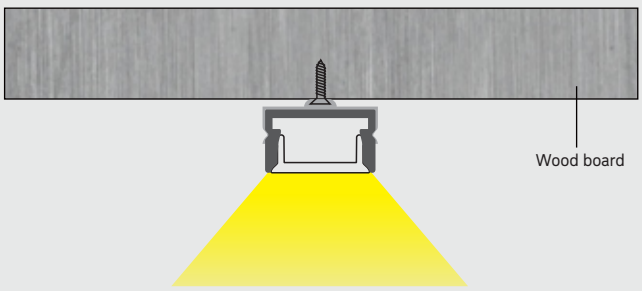

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black



PMMA

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

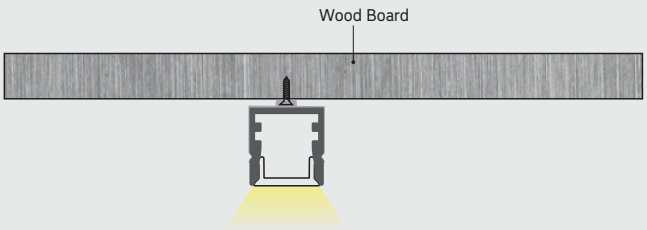

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

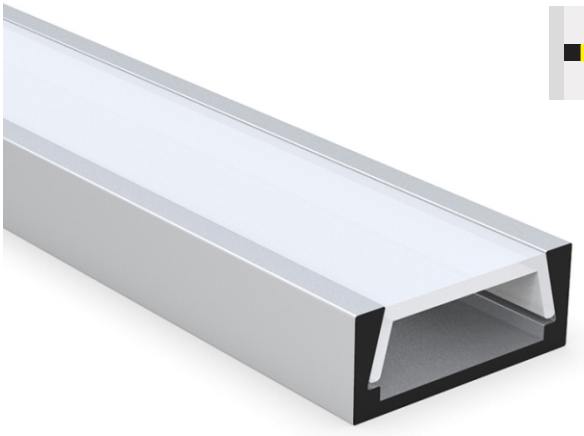

Types of Installation:



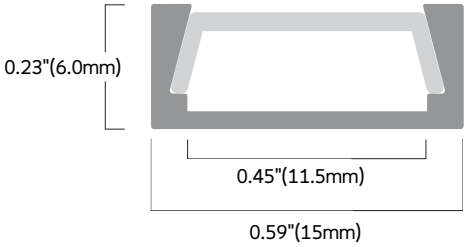

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

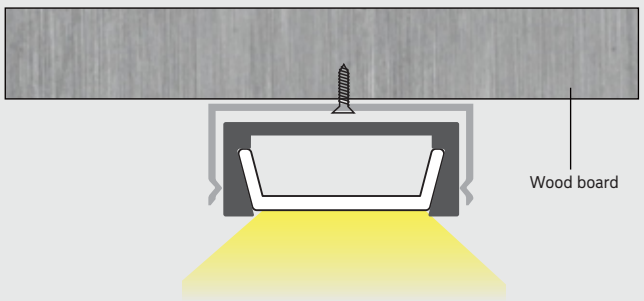

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m



Types of Installation:

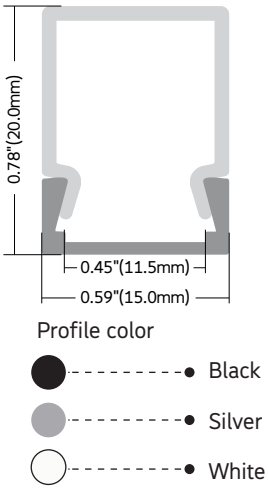

Profile color

Black

Silver

White

Profile Components



PC

diffused/clearar



PMMA

diffused/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

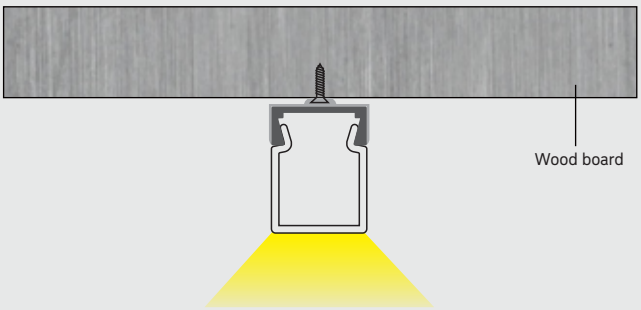

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

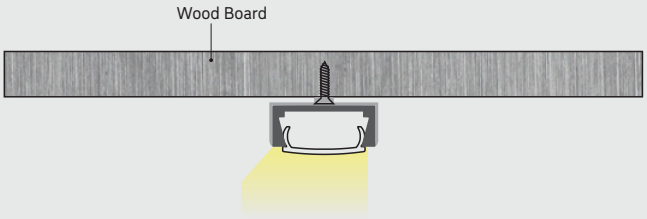

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-224-10MM	182LEDs	24V	15W/m	1800LM/m

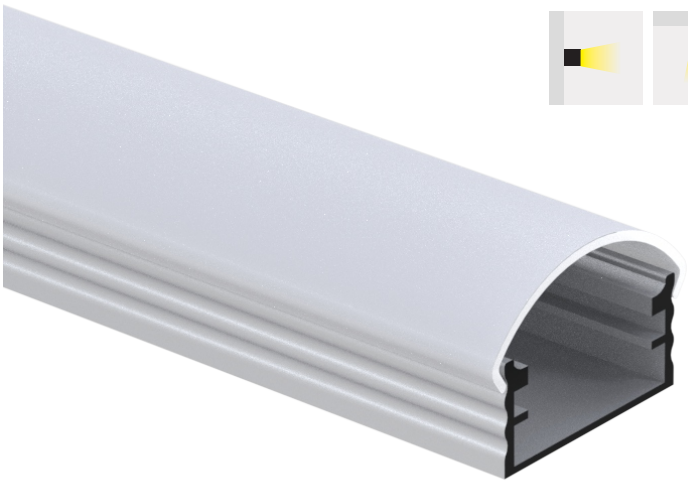

Types of Installation:

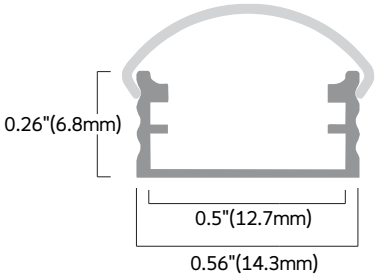

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

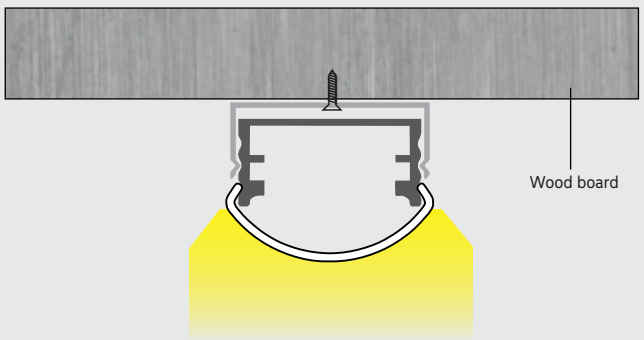

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



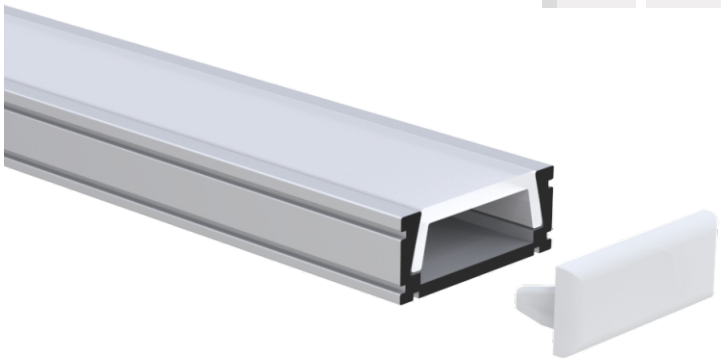

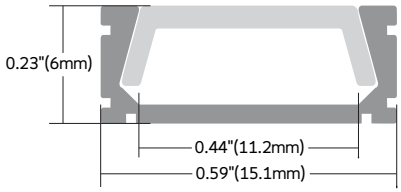

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black



PMMA

clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

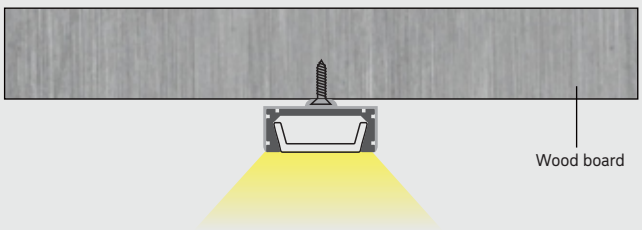



Types of Installatlon:



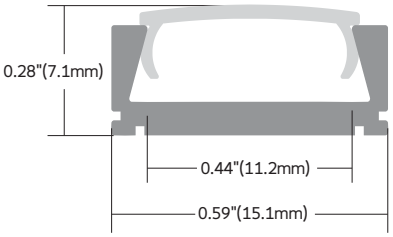

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

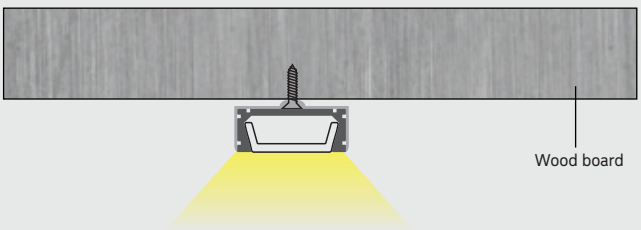

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

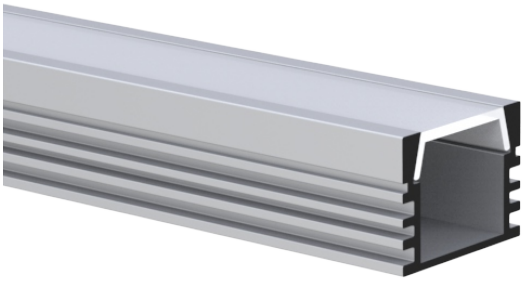

Types of Installation:





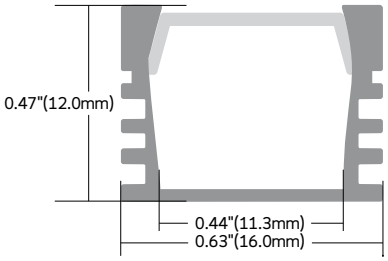

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black



PMMA

clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

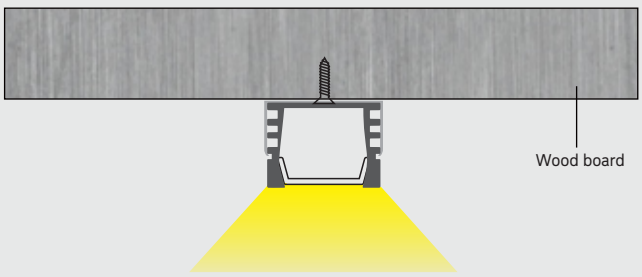

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installatlon:



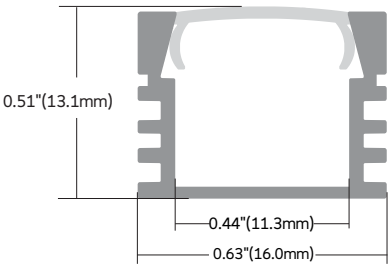

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

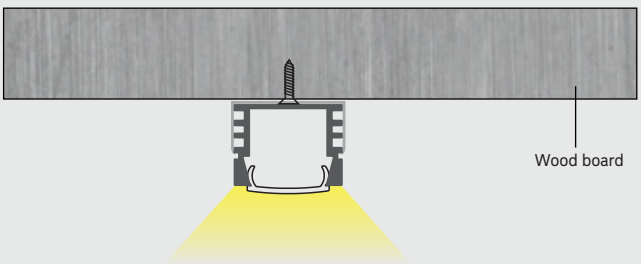

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



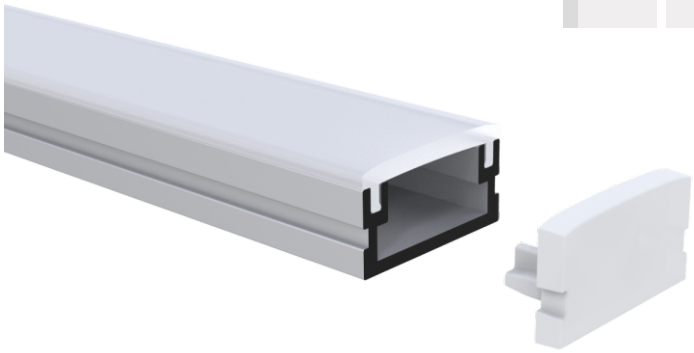

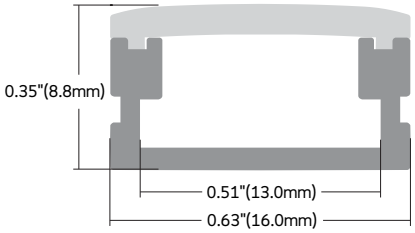

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

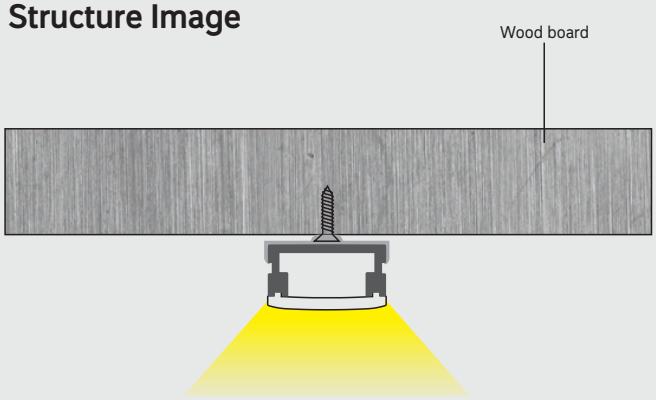

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

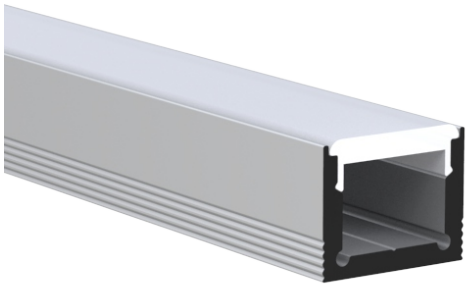

Types of Installatlon:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

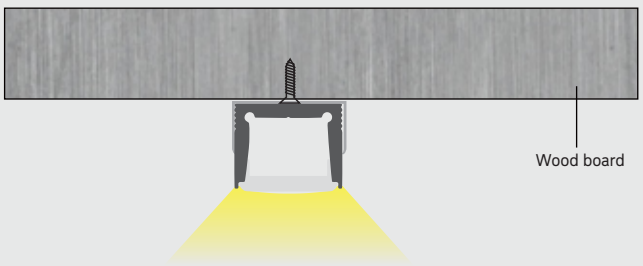

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

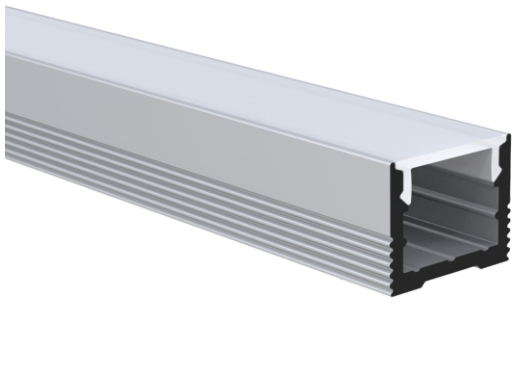

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

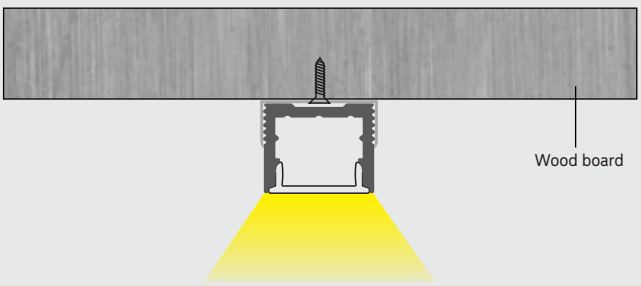

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



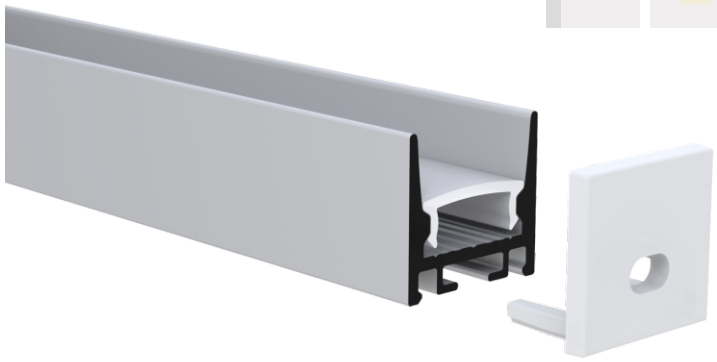



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

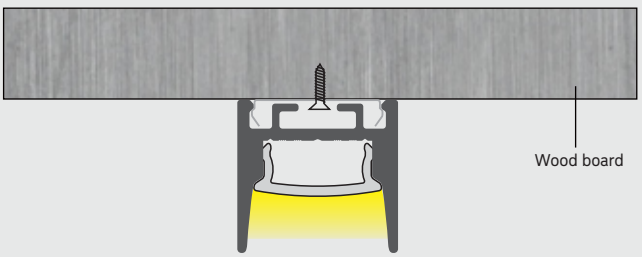



90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



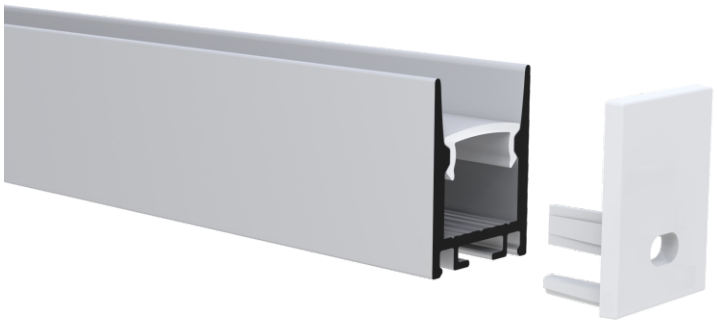



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

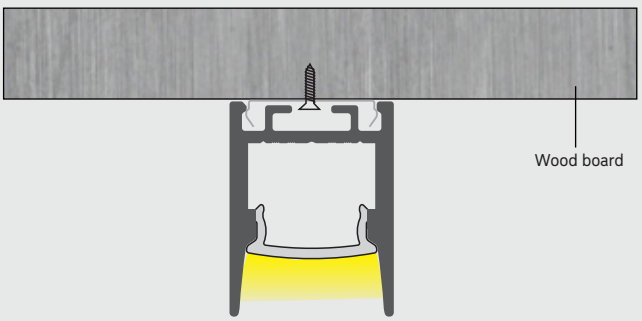



90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

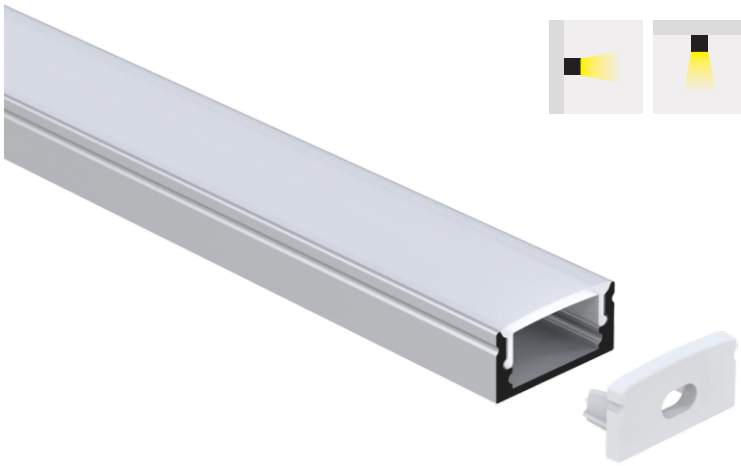

Types of Installation:

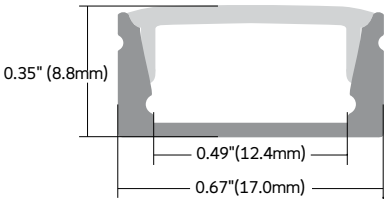

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Connector



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

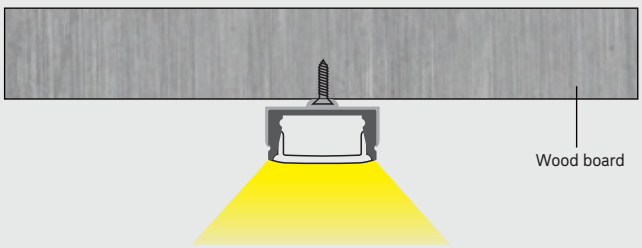

Effect Image



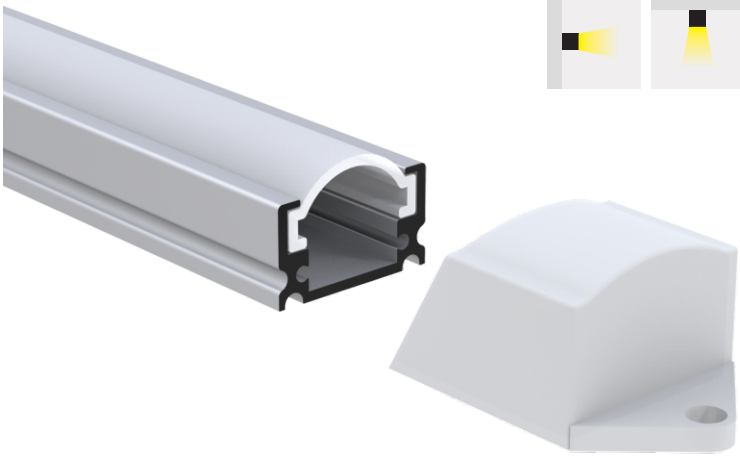

Types of Installation:

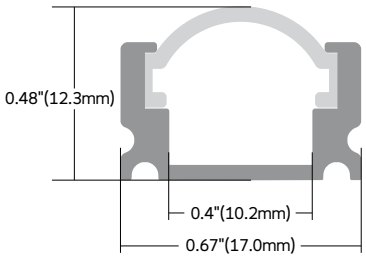

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

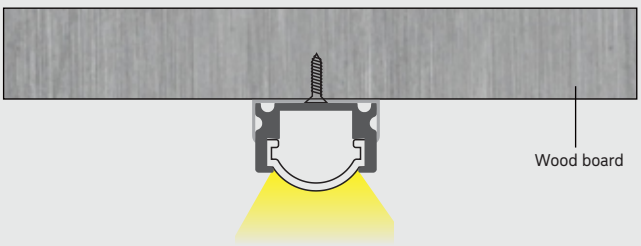

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



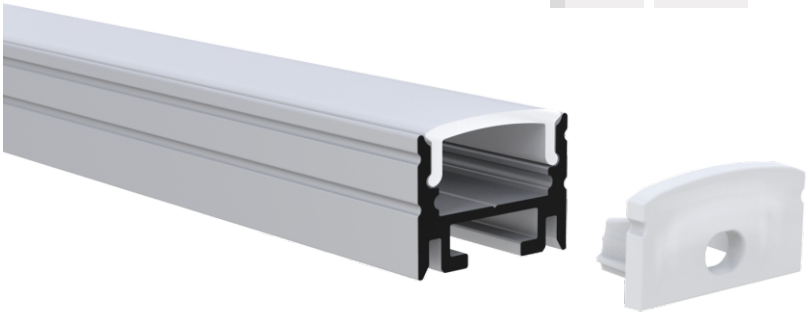



Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

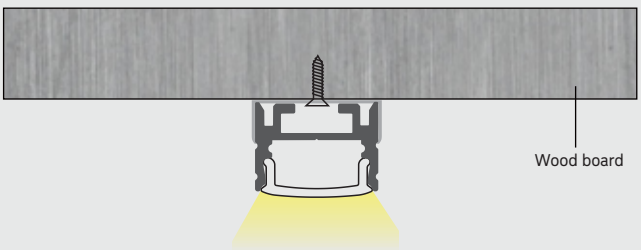

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

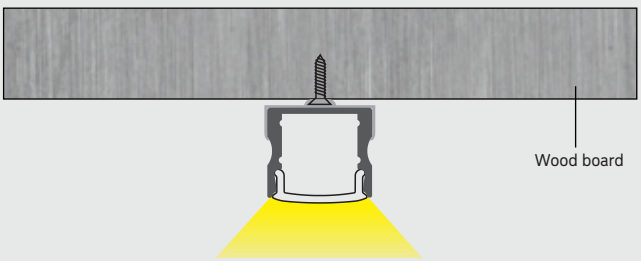

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



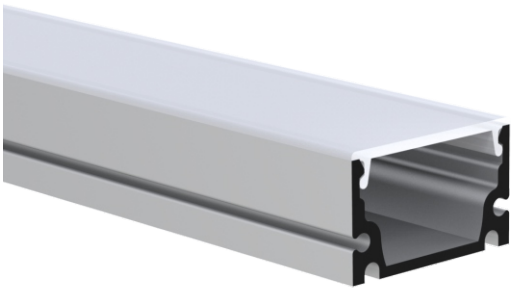



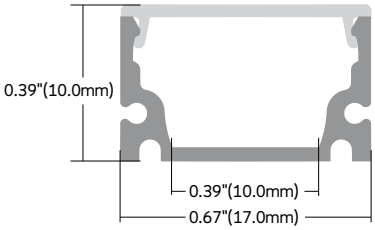

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

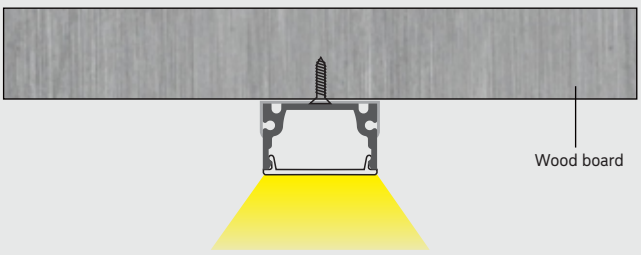

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

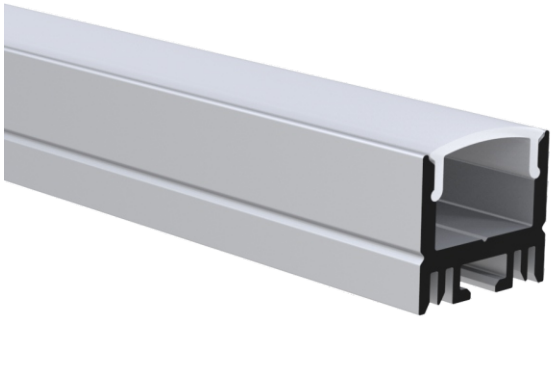

Types of Installation:



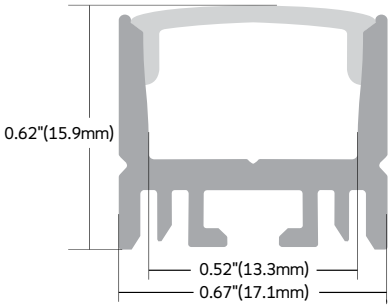

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
opal matte /black



PMMA

clear/semi-clear/
opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

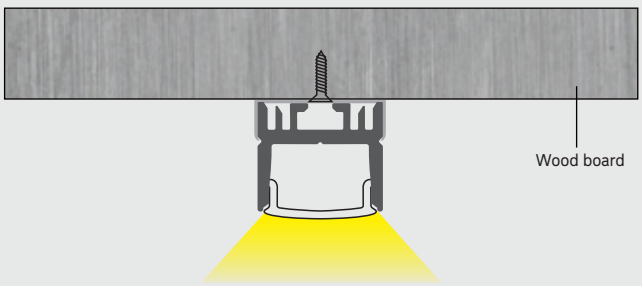



90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



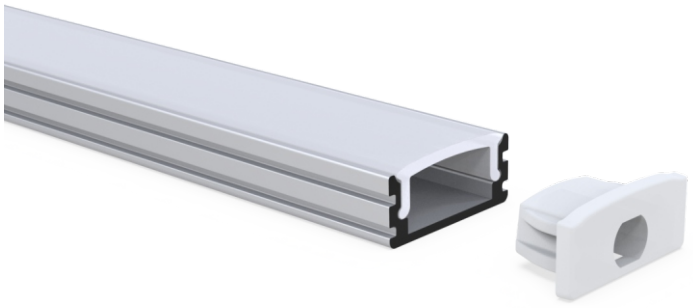

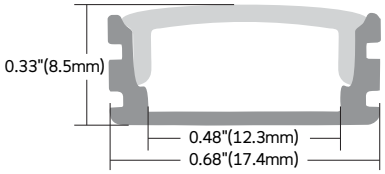

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

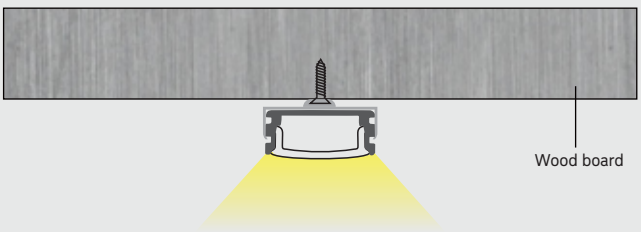

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



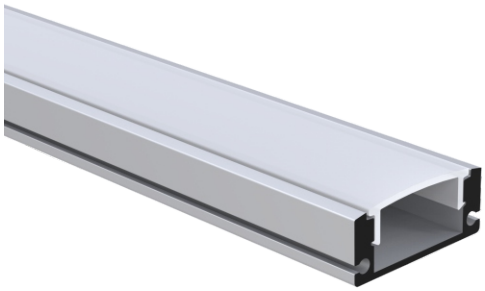



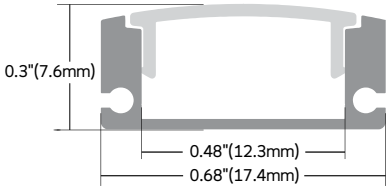

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black



PMMA

diffused/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

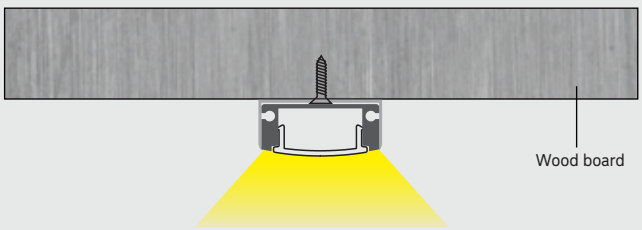

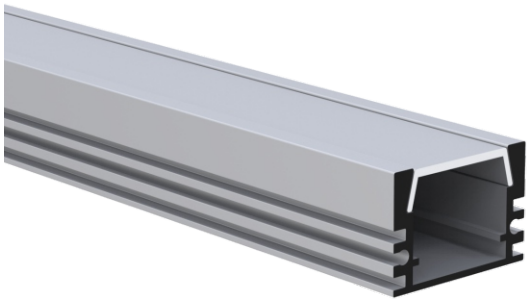

Types of Installation:



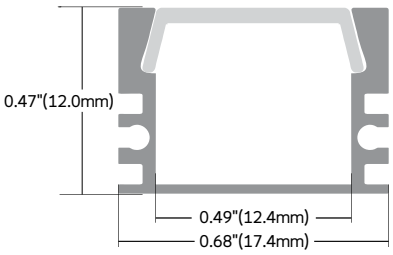

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

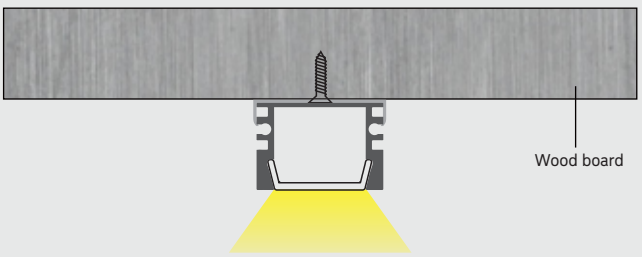

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



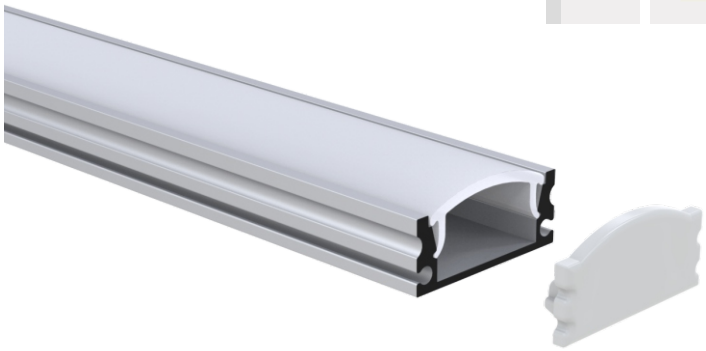

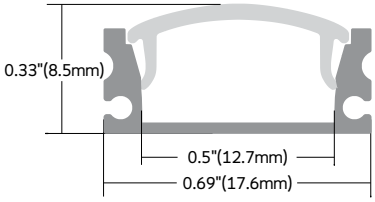

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

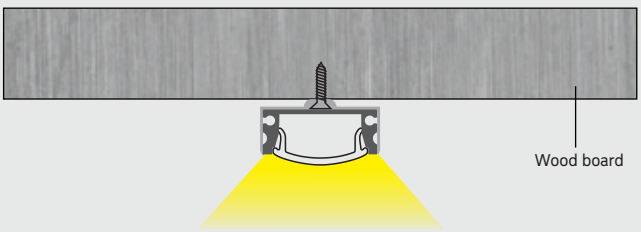

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



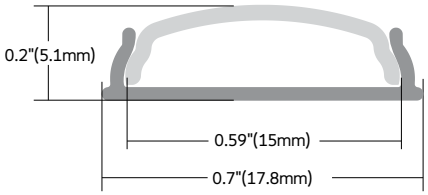

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

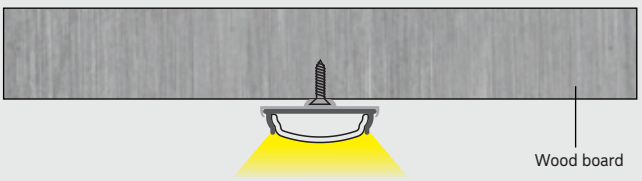

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-300-10MM	300LEDs	12V/24V	13W/m	1694LM/m

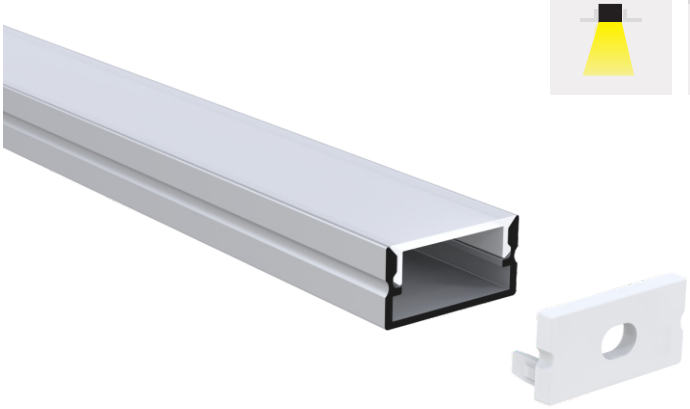

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black/

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

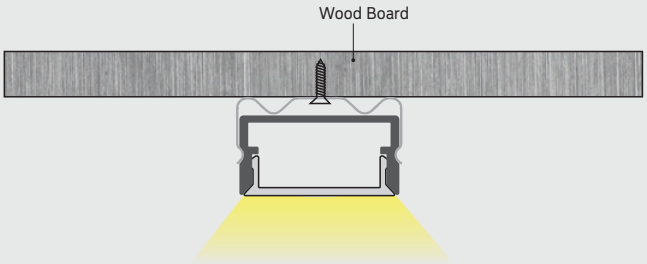

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

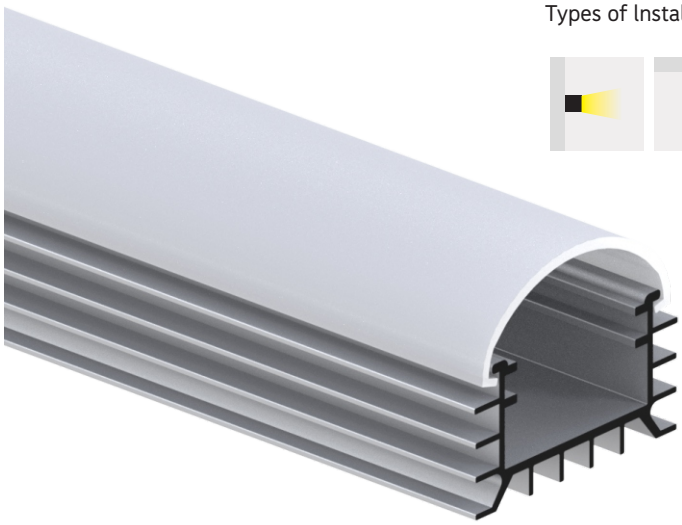

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

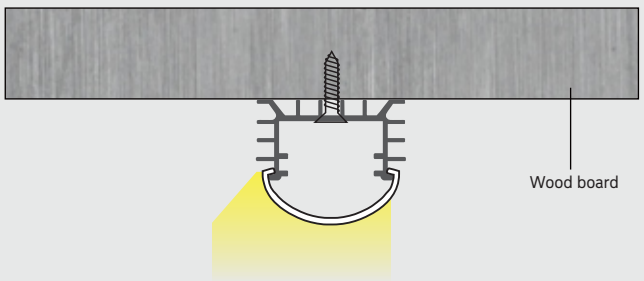

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused/
clear /black



PMMA

clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

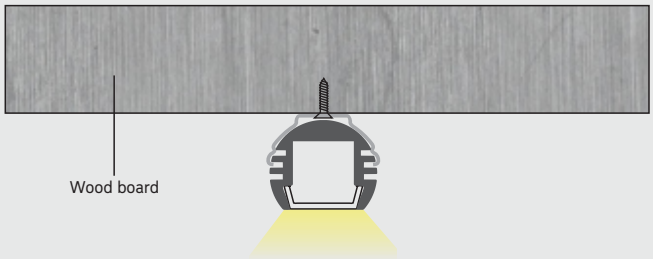

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

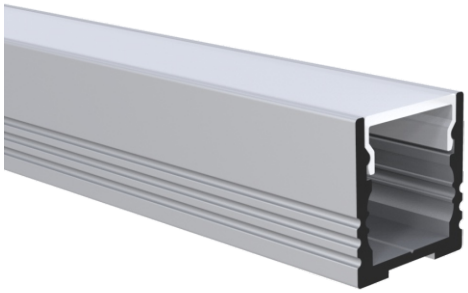

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
Prismatic Frosted

PMMA

opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

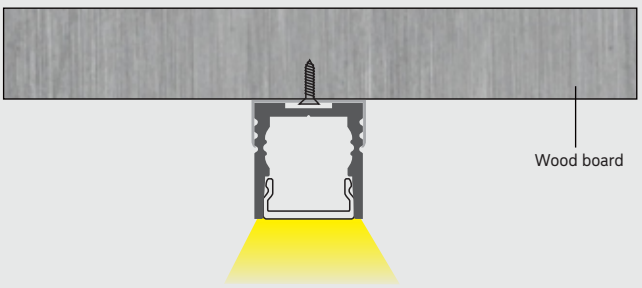

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
Prismatic Frosted

PMMA

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

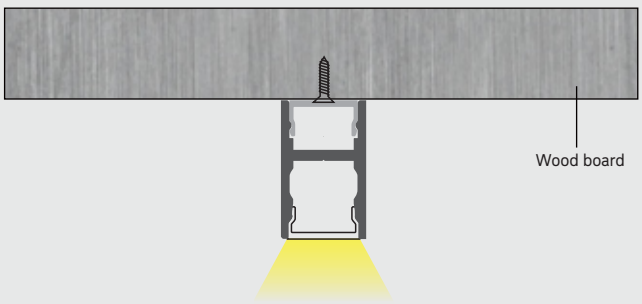

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

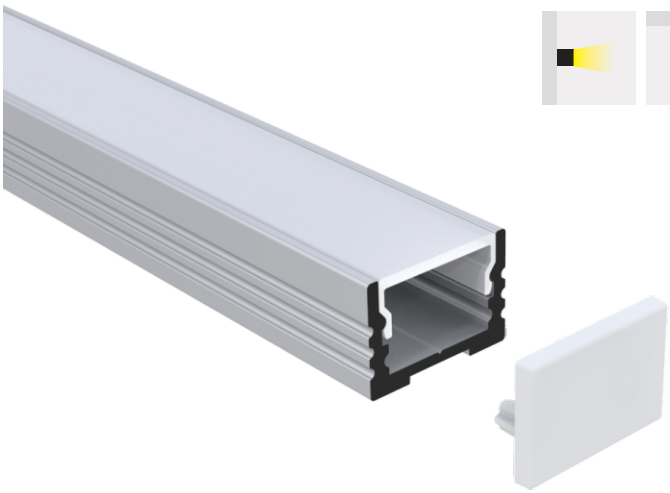

Types of Installation:

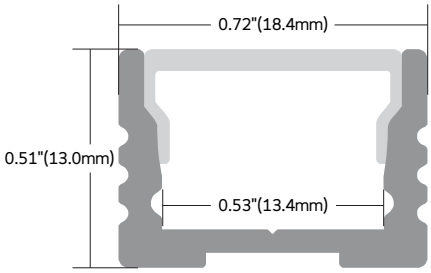

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
Prismatic Frosted

PMMA

opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

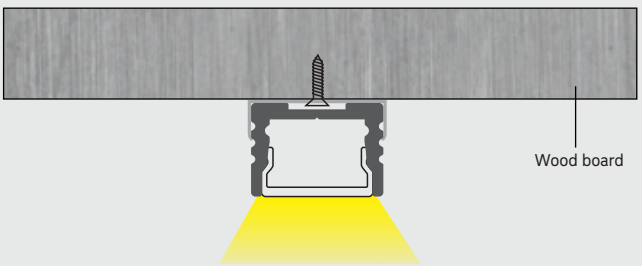

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



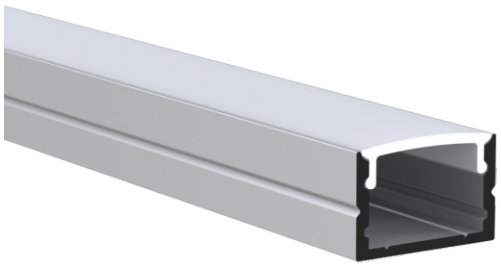





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Installation Accessories

End cap × 2	
End cap with hole × 2	
Mounting clip	

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

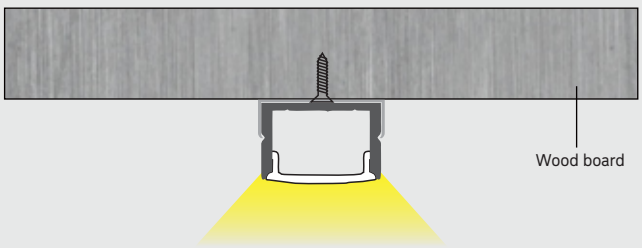

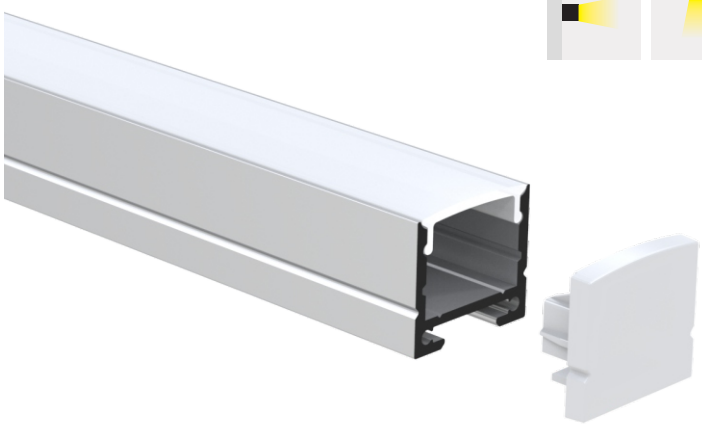

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

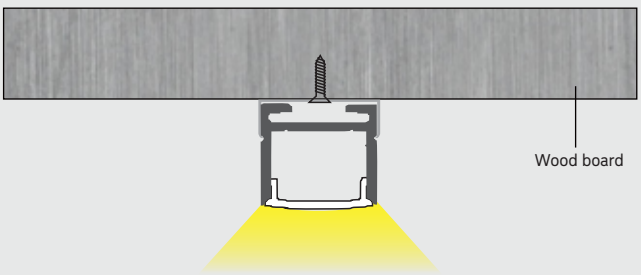

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



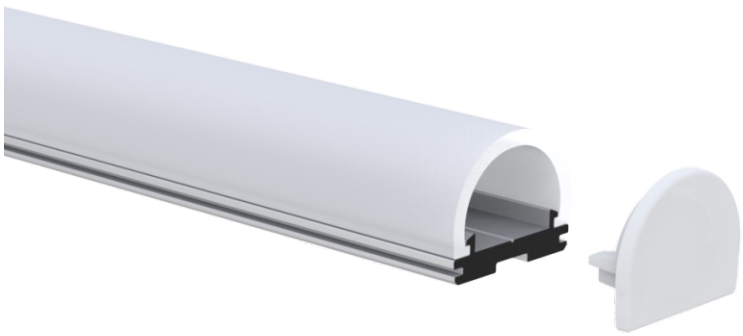



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

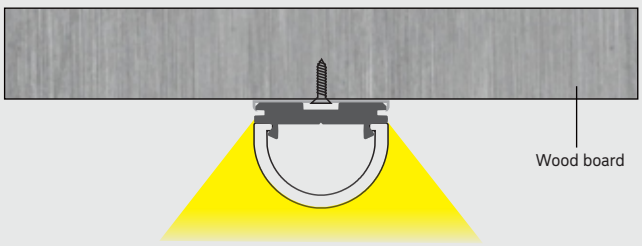

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





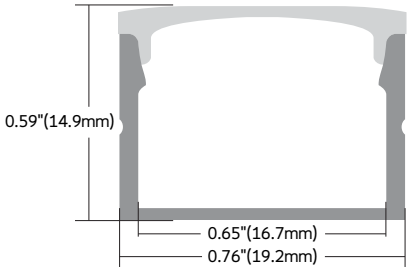

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

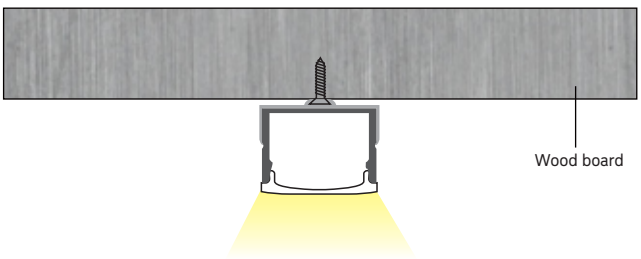

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

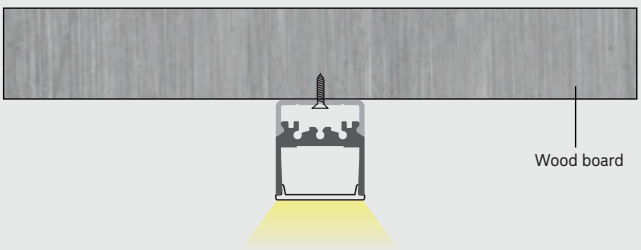





Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

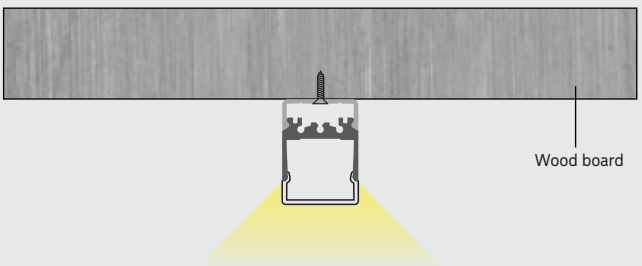

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

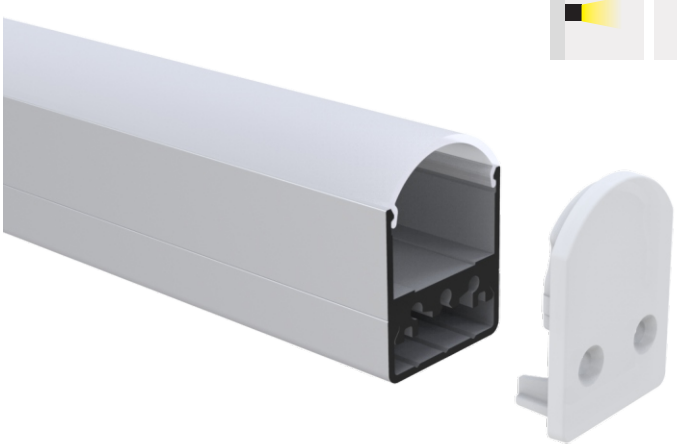

Types of Installation:



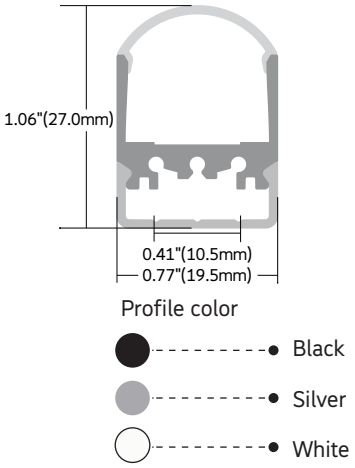

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

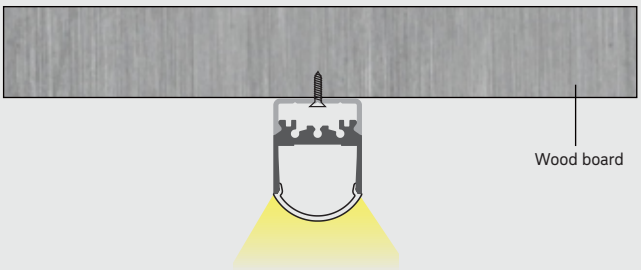

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

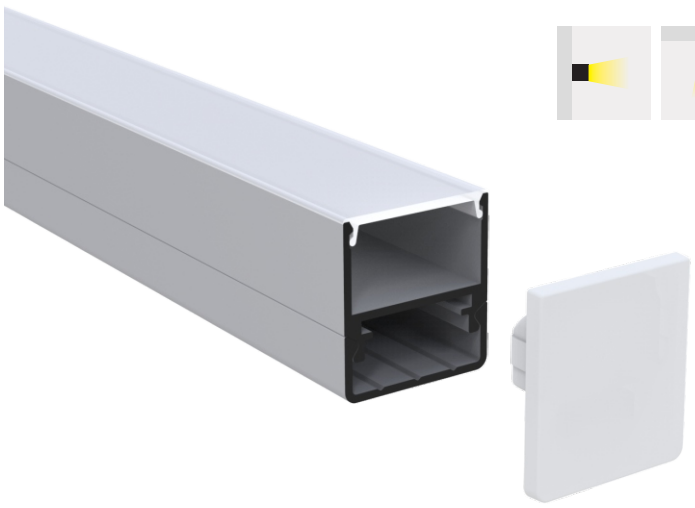

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

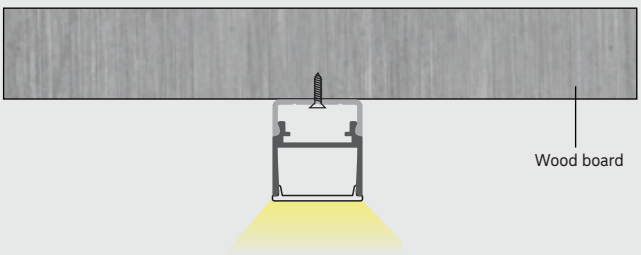

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

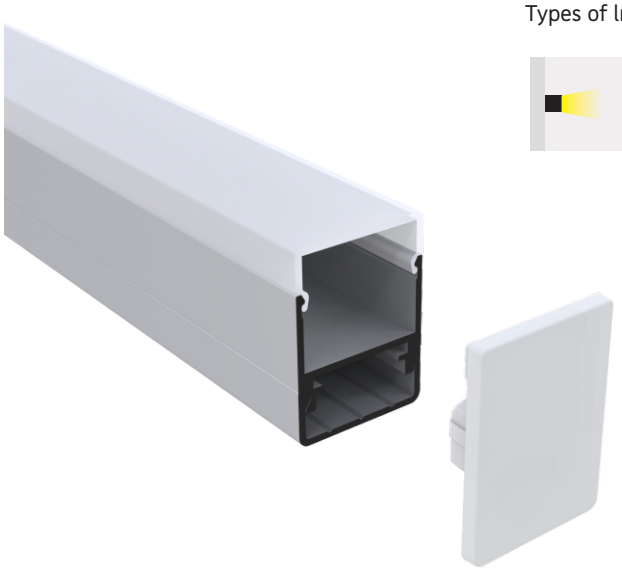

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

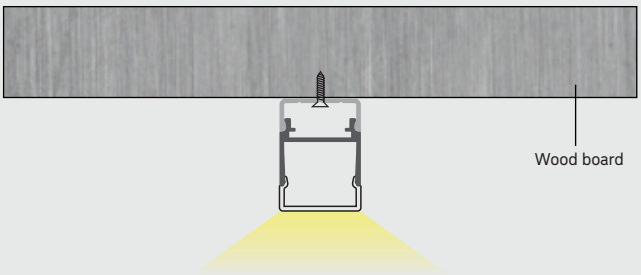

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m



Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

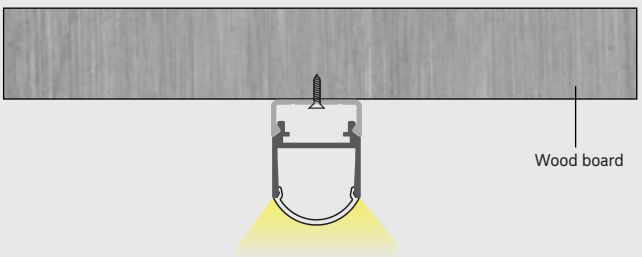

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

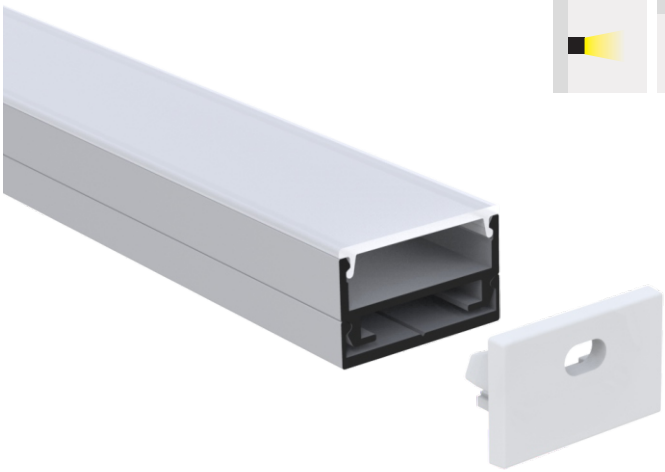

Types of Installation:

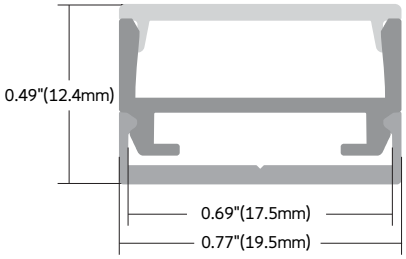

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

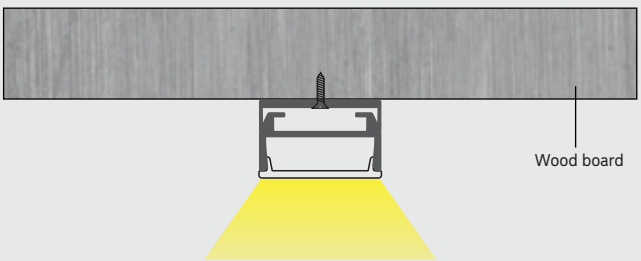

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m



Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

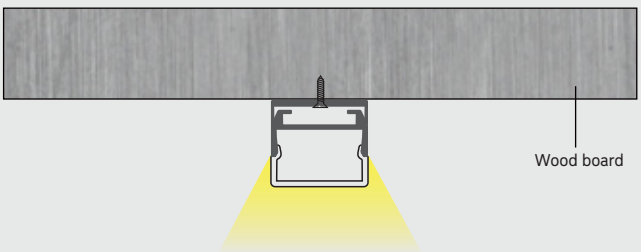

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

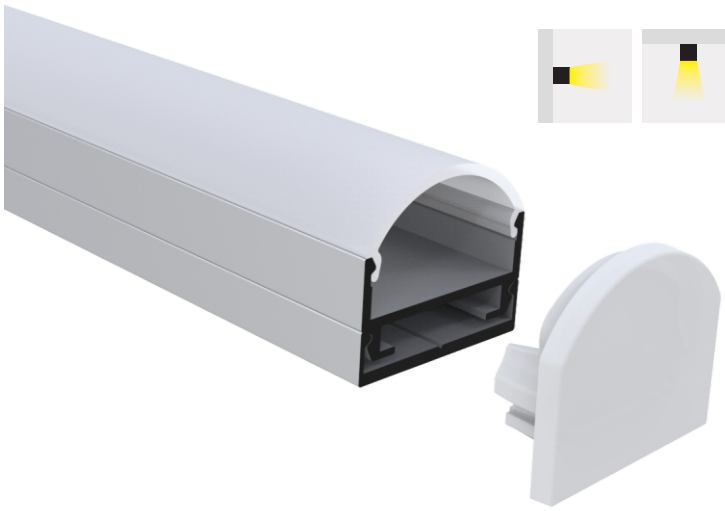

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC
diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

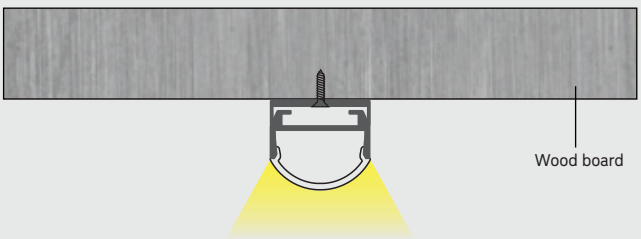

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



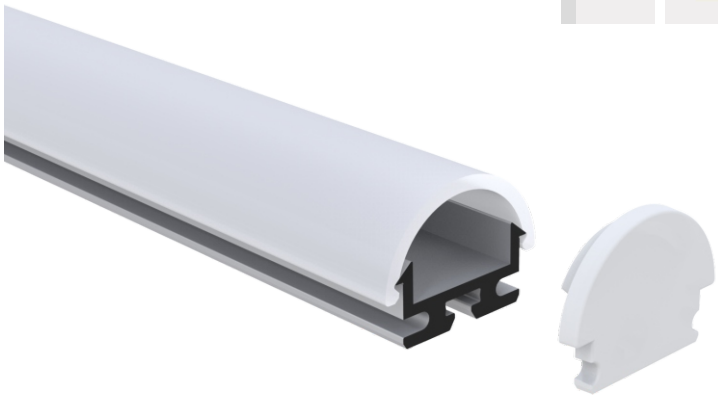



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

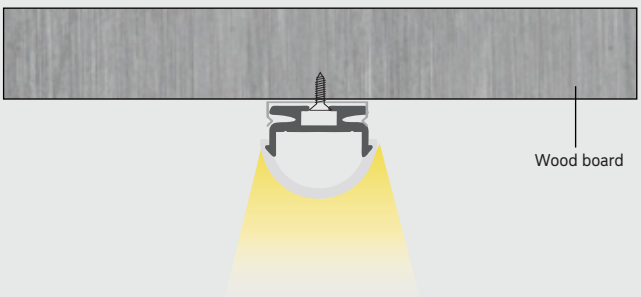

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

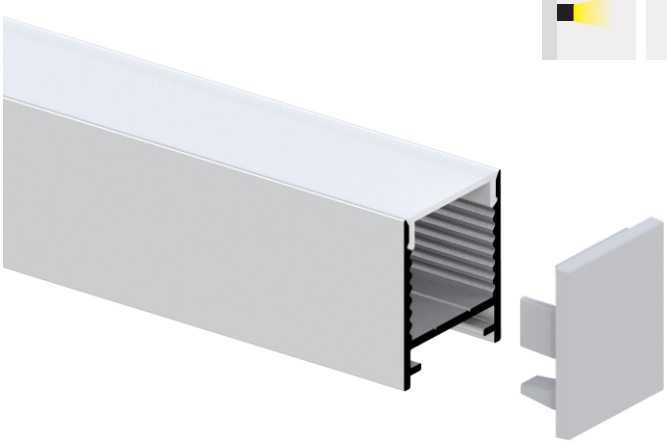

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

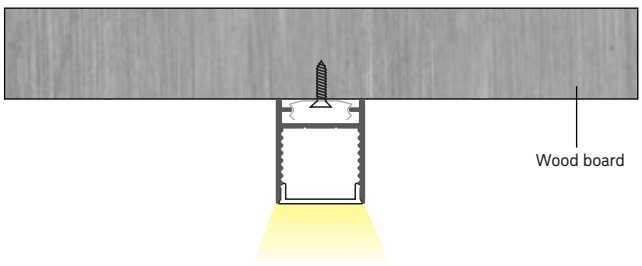

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

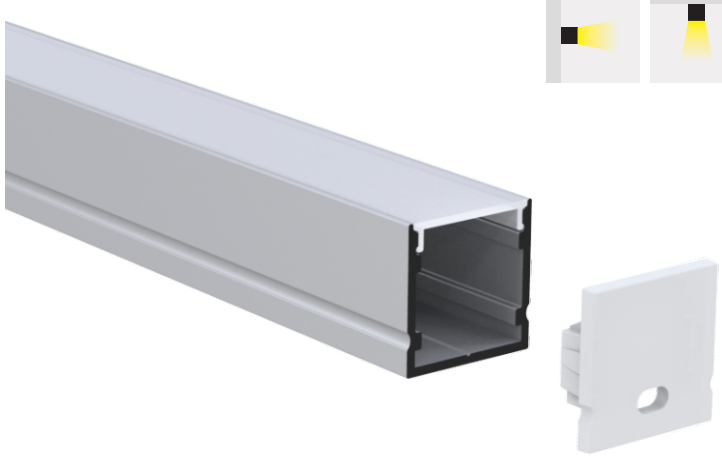

Types of Installation:

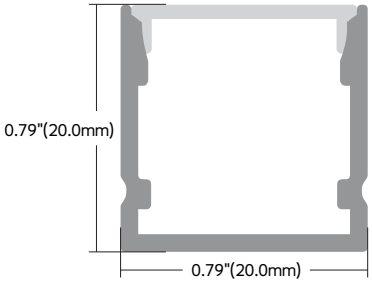

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

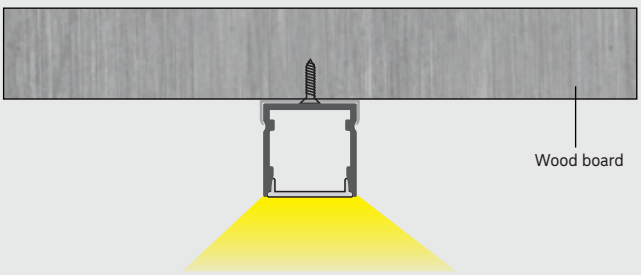

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

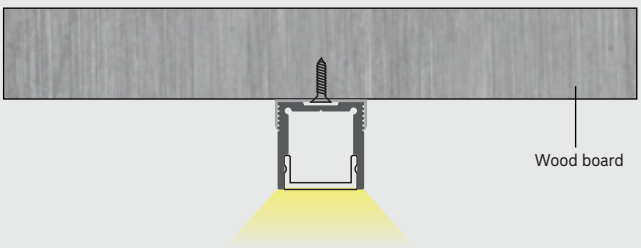

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

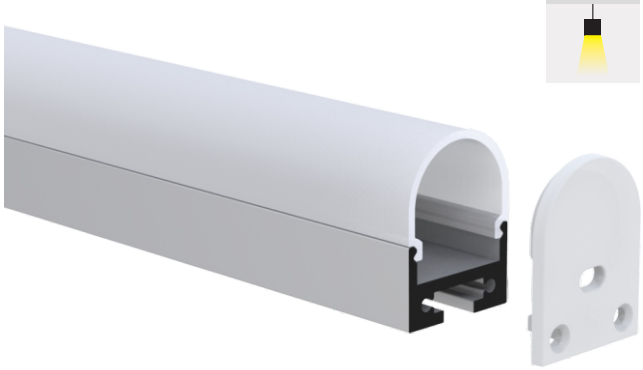

Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip





90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Structure Image

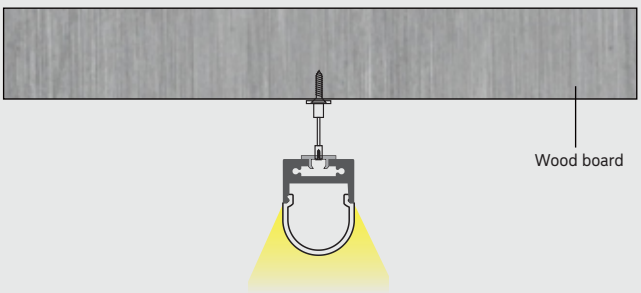

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip





90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Structure Image

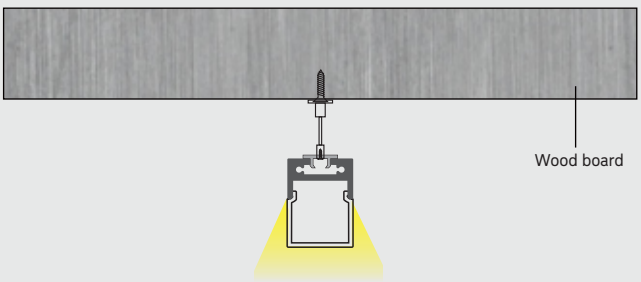

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

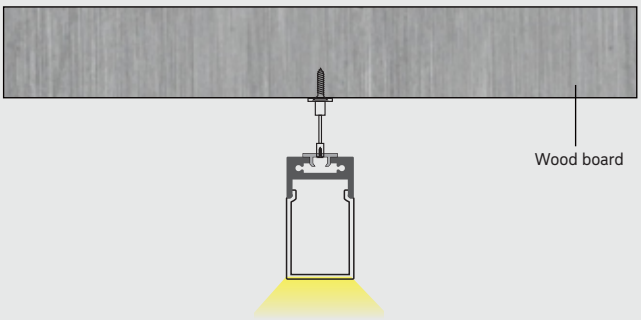

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installatlon:



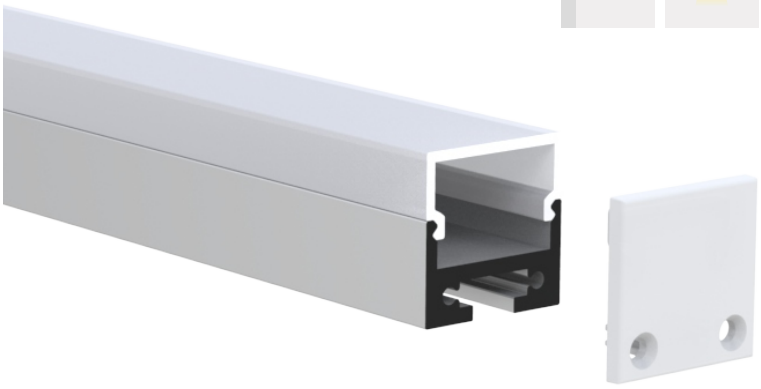



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

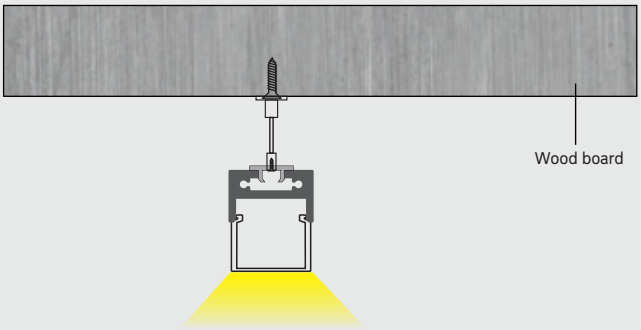

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

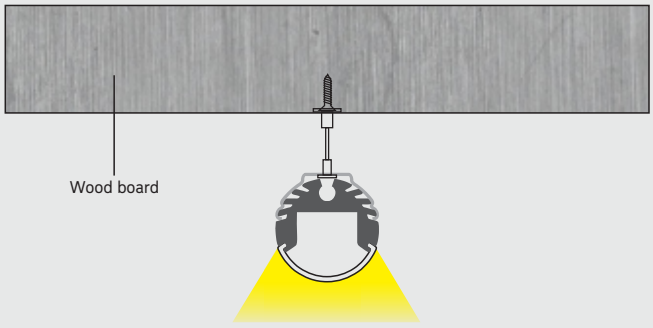

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

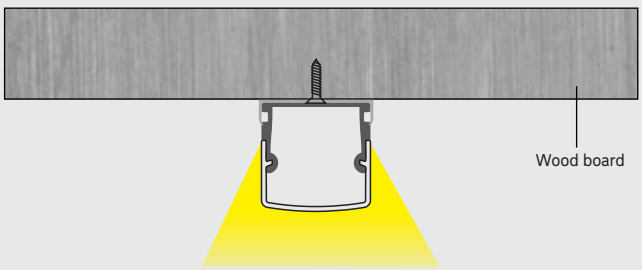

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installatlon:





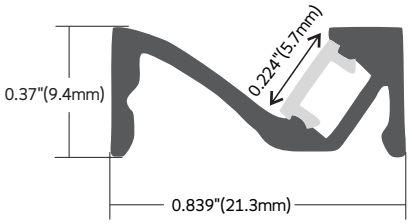

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image

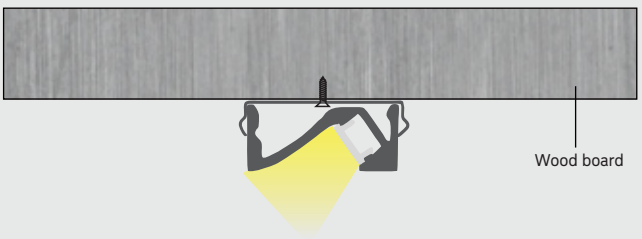

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Types of Installation:



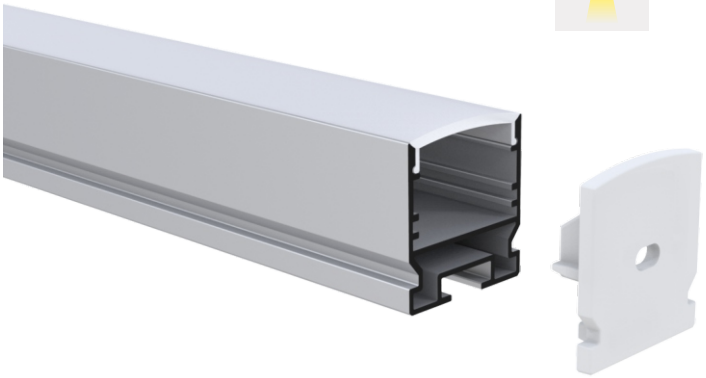



Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

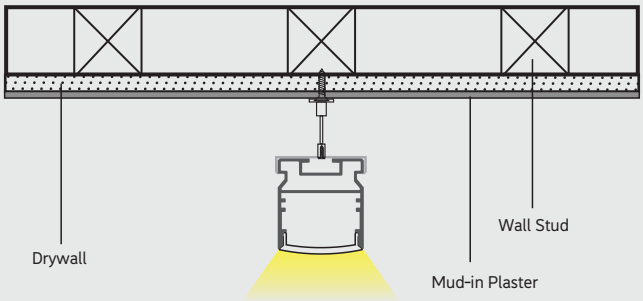

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



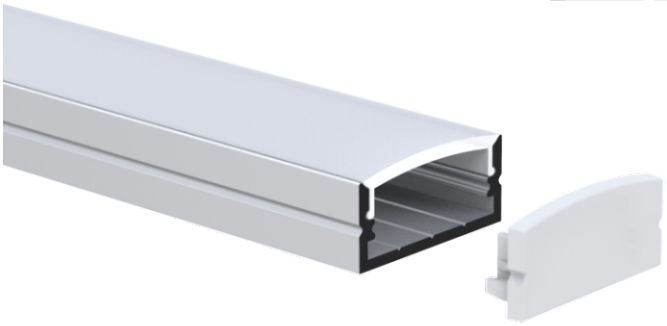

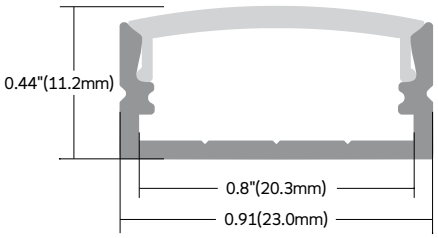

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

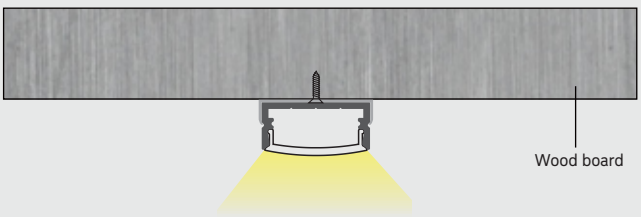

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



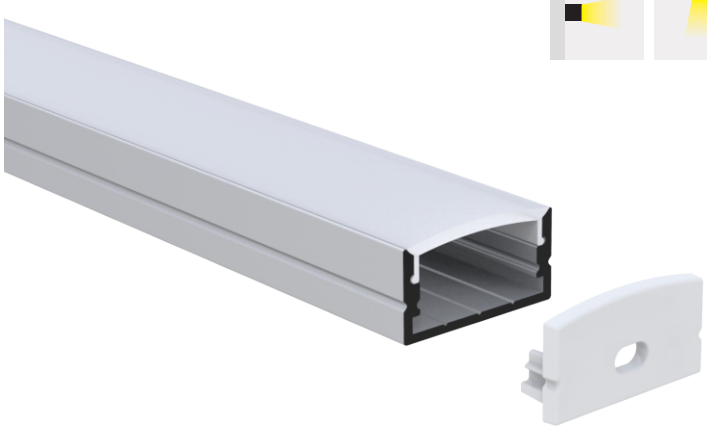

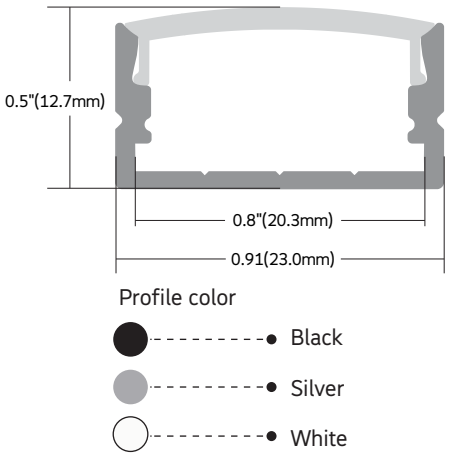

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

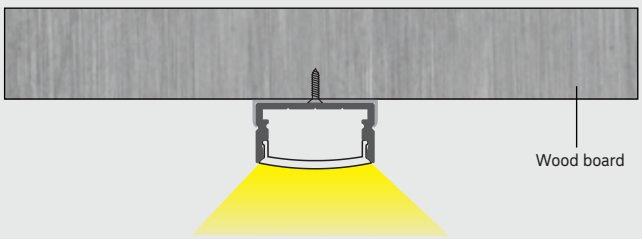

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip





90° joing connector



180° joining connector



135° Vearical connector



90° joing connector



180° joining connector

Structure Image

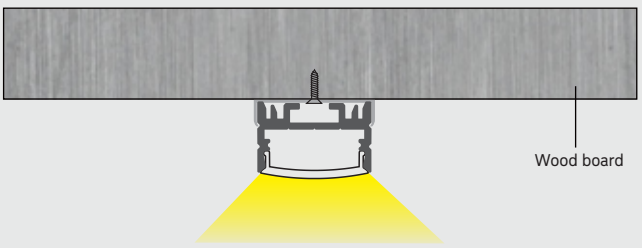

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

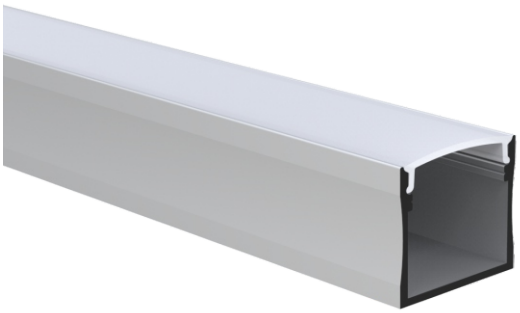

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC
diffused



PMMA
diffused

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

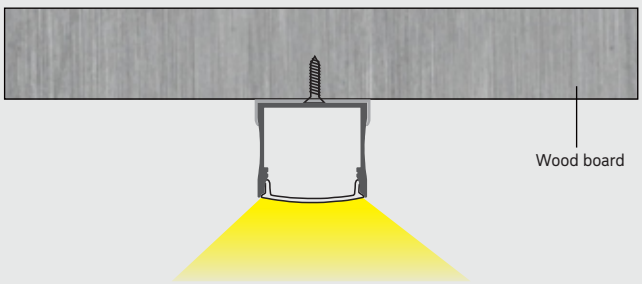

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



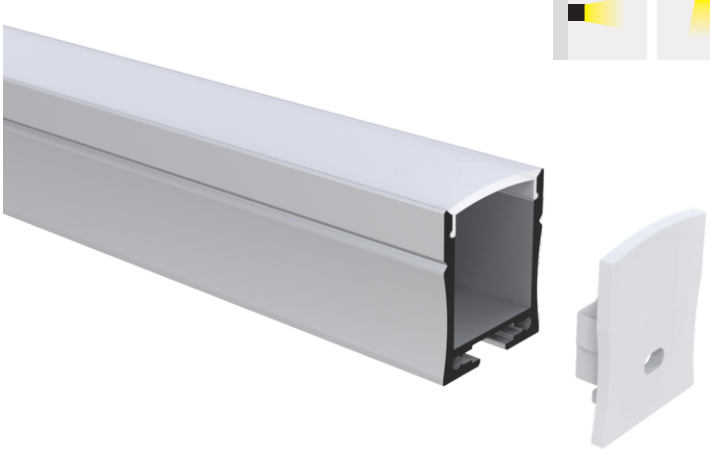



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

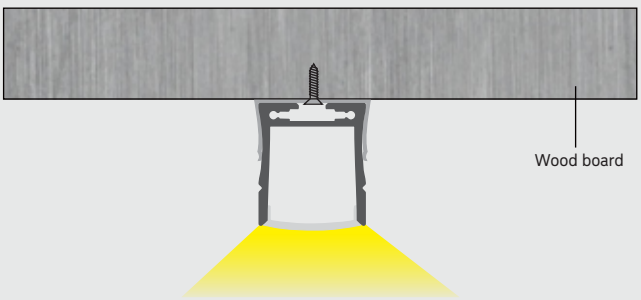

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

Black

Silver

White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

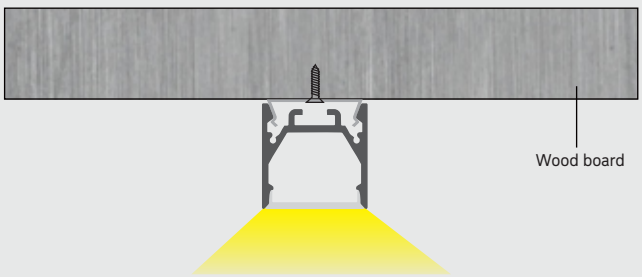

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

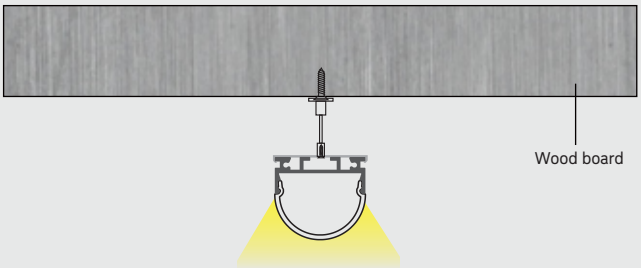

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m



Types of Installation:



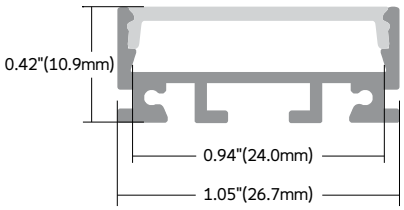

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

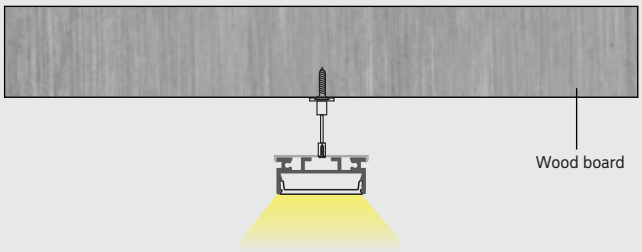

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

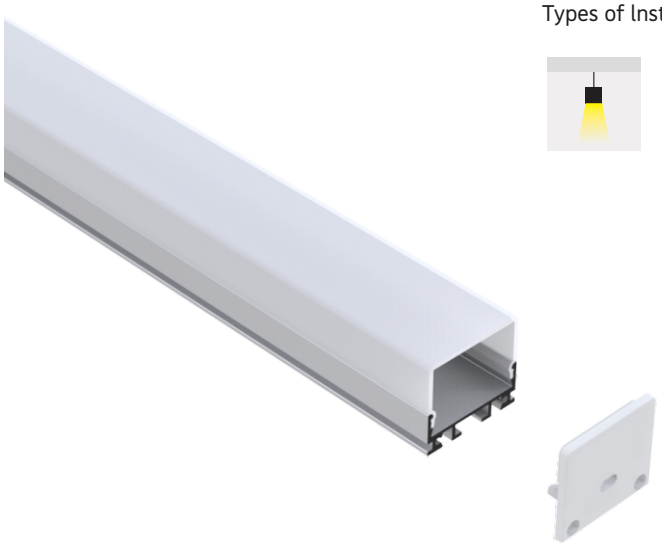

Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

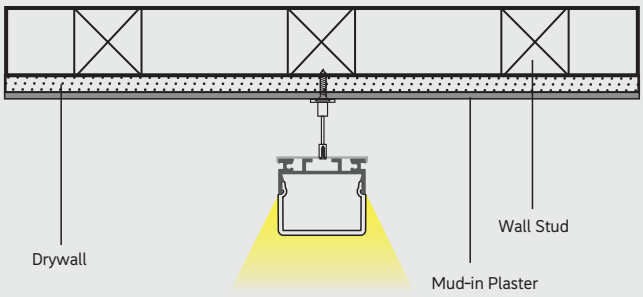

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffuse/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

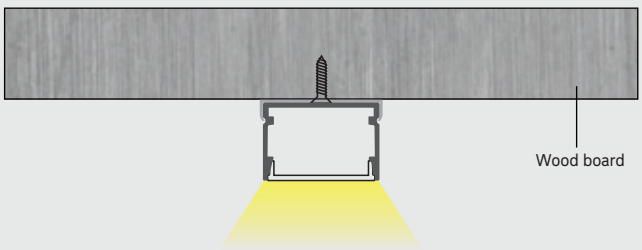

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



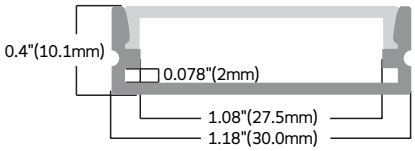

Profile color

- Black
- Silver
- White

Profile Components



PC

diffuse/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

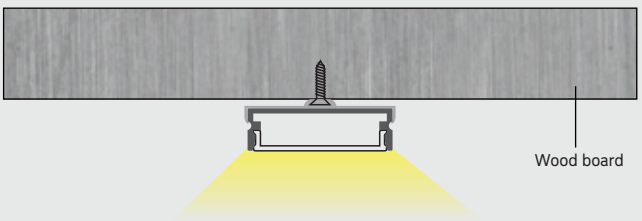

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffuse

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

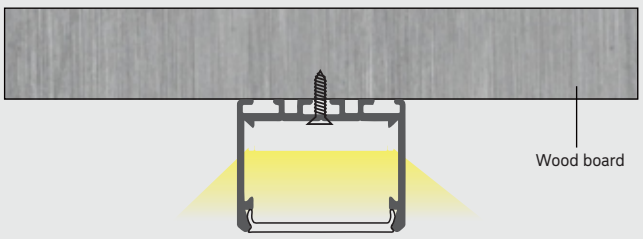

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

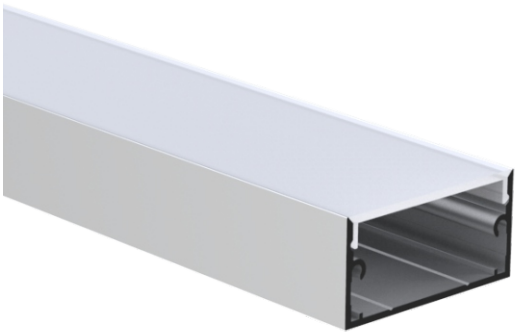

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffuse

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

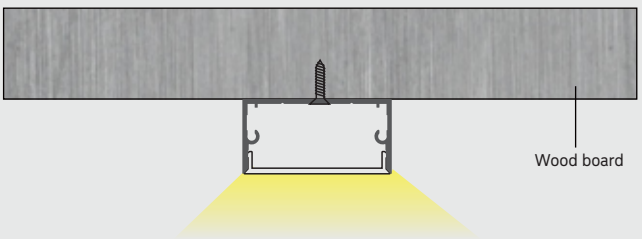

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:



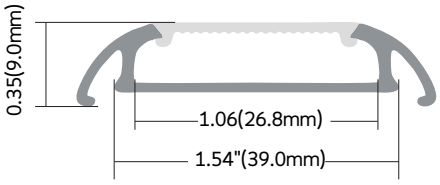

Profile color

Black

Silver

White

Profile Components



PC

diffuse

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

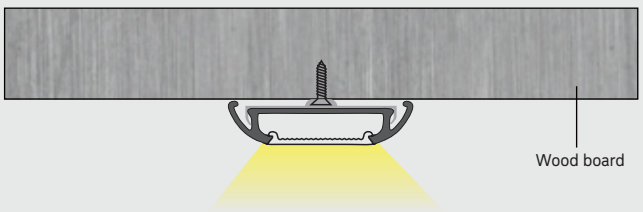

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Suspension wire



Structure Image

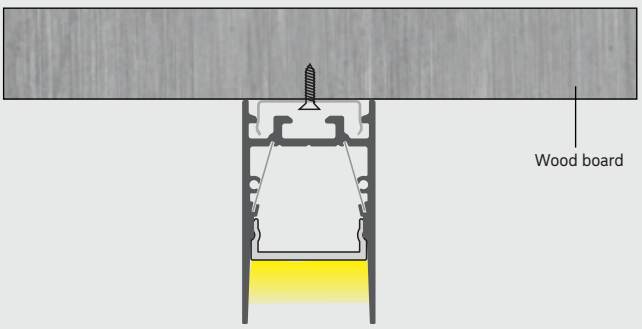

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Suspension wire



Structure Image

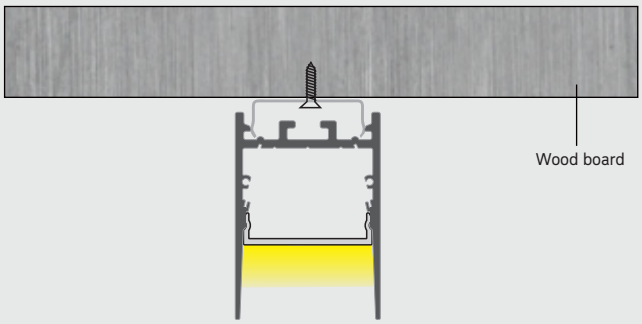

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



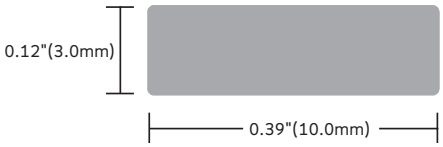

Profile color

- Black
- Silver
- White

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

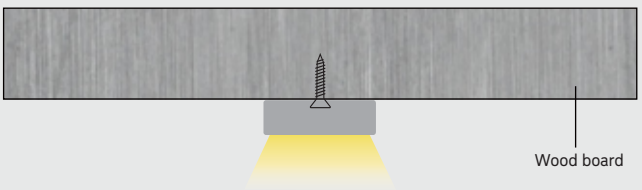

Effect Image

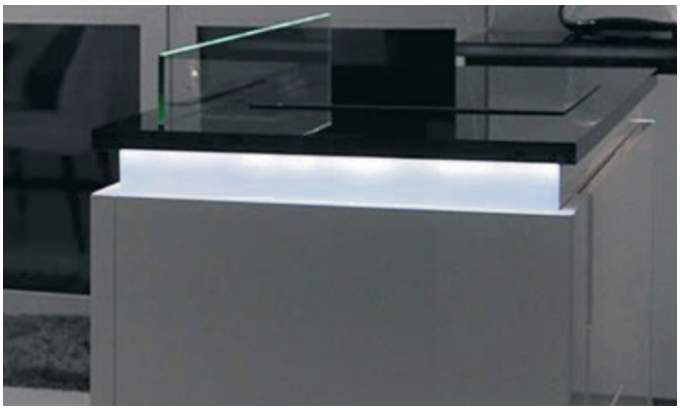

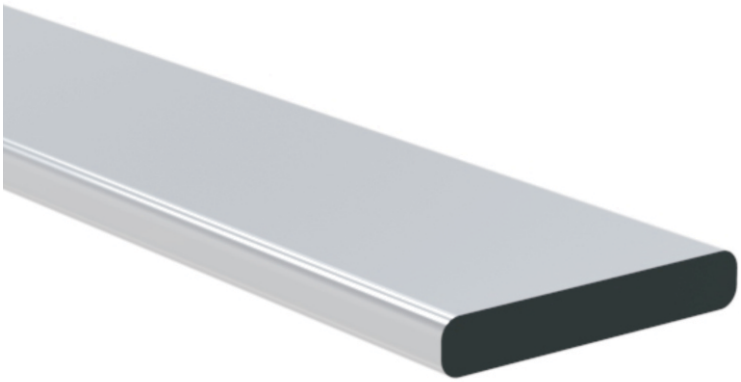



Profile color

Black

Silver

White

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

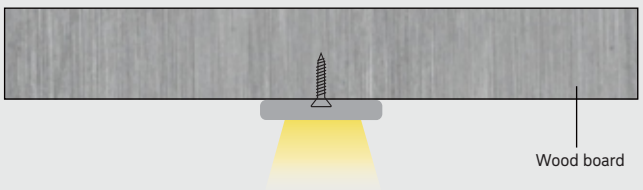

Effect Image

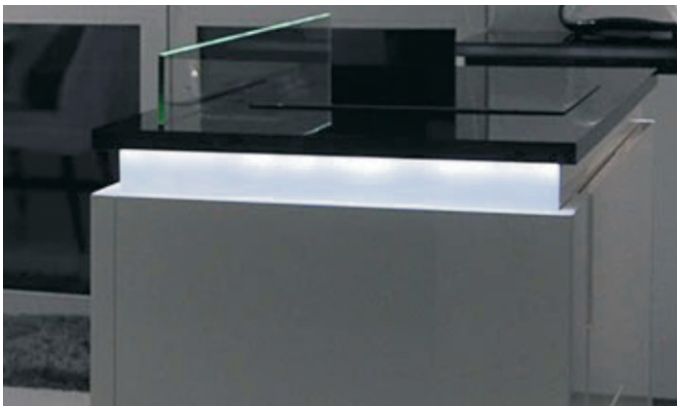

Types of Installation:





Profile color

- Black
- Silver
- White

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

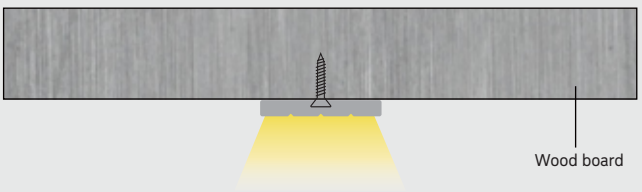

Effect Image

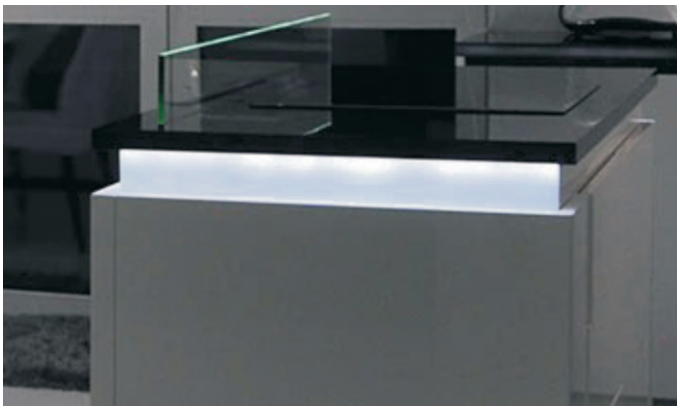

Recessed Series

Application

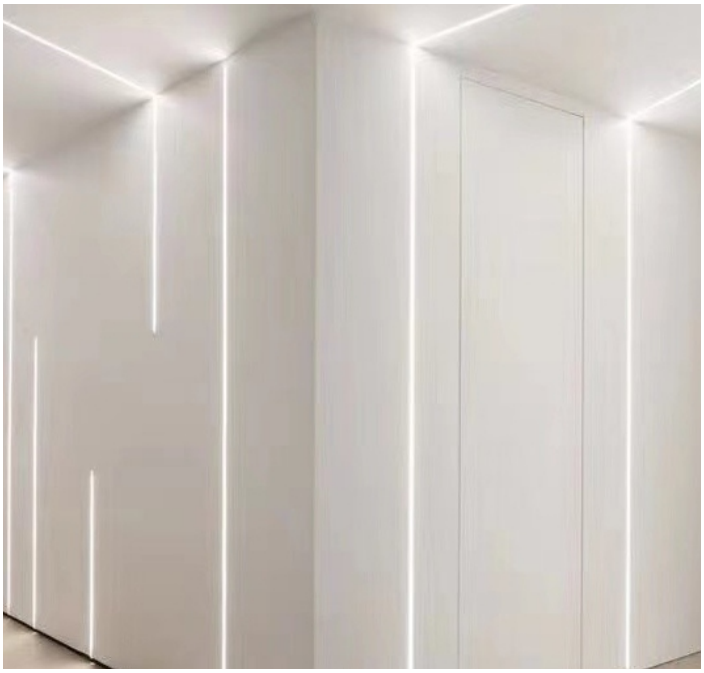

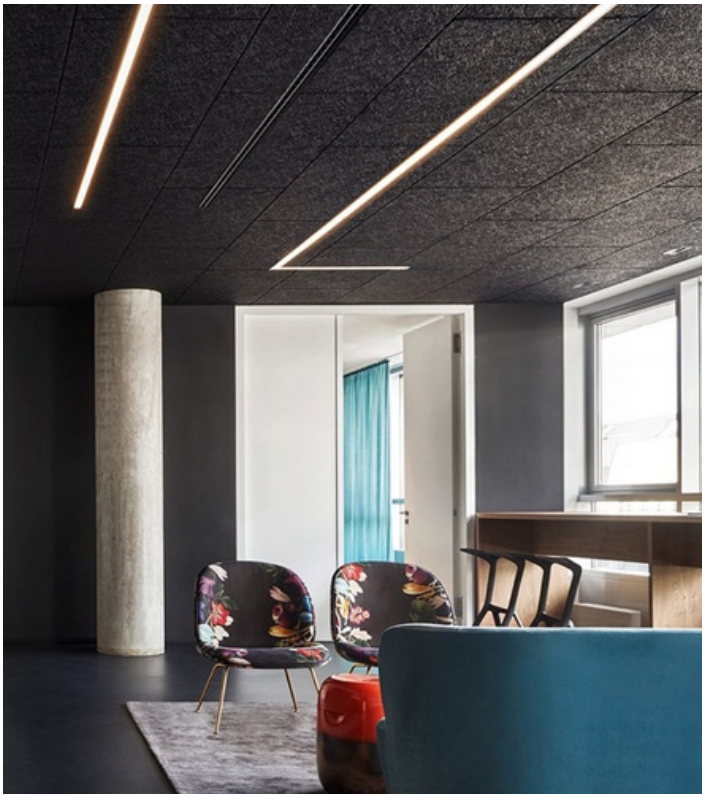







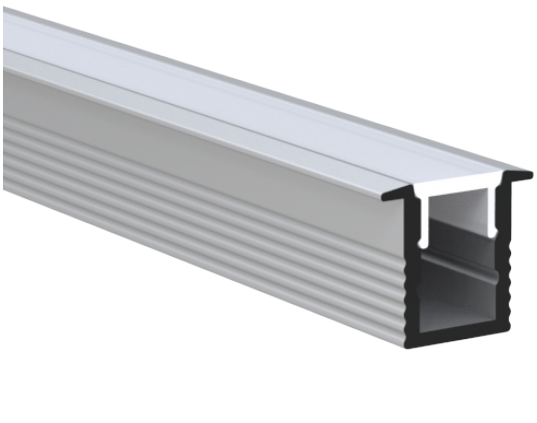

Types of Installatlon:





Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

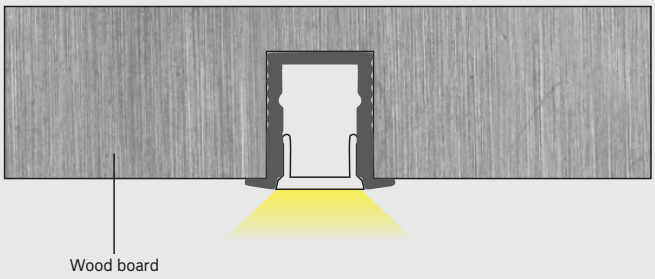

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

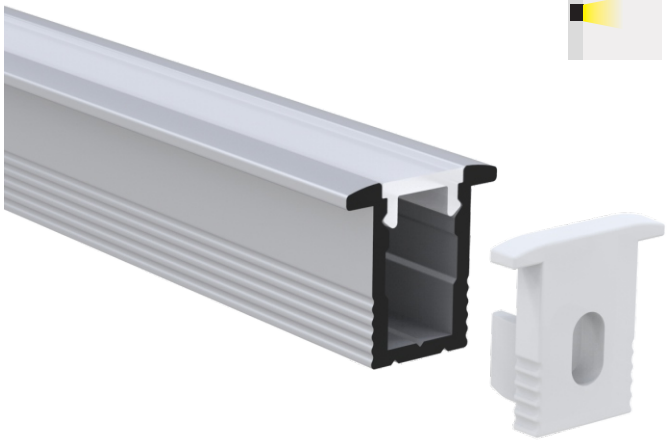

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused/opal matte /
black/Prismatic Frosted

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

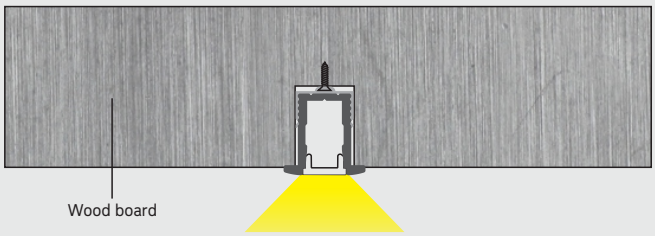

Effect Image



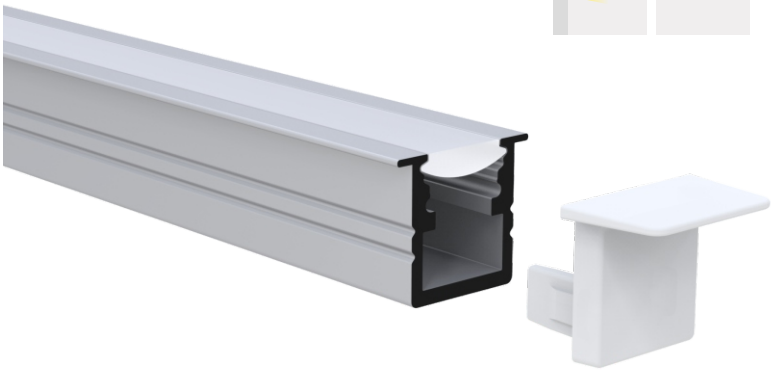

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

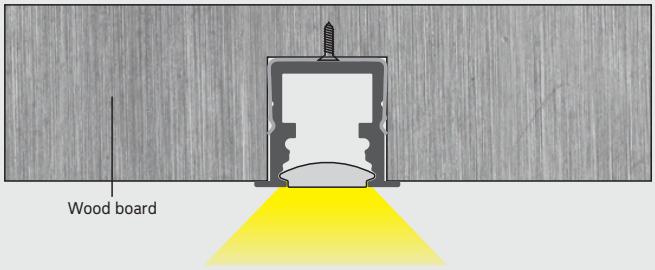

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	1300LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	1300LM/m

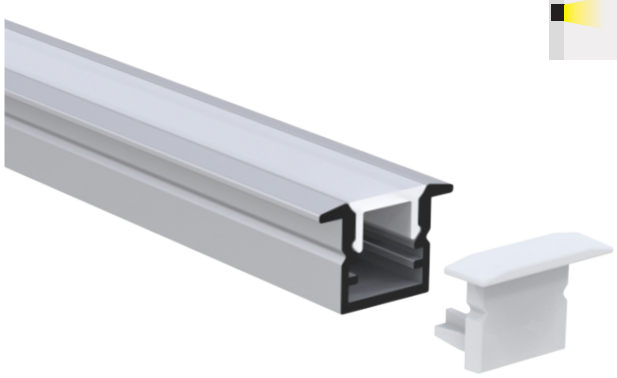

Types of Installation:



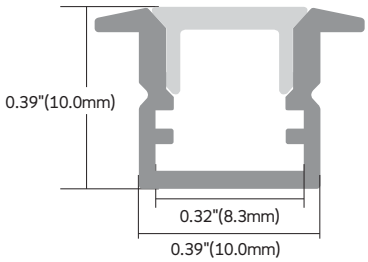

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
black/Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

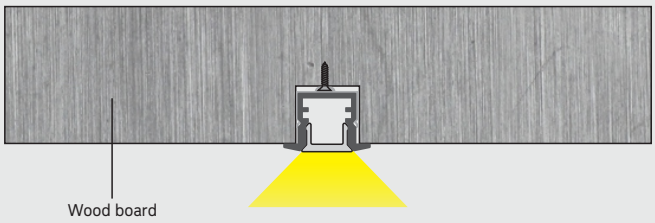

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

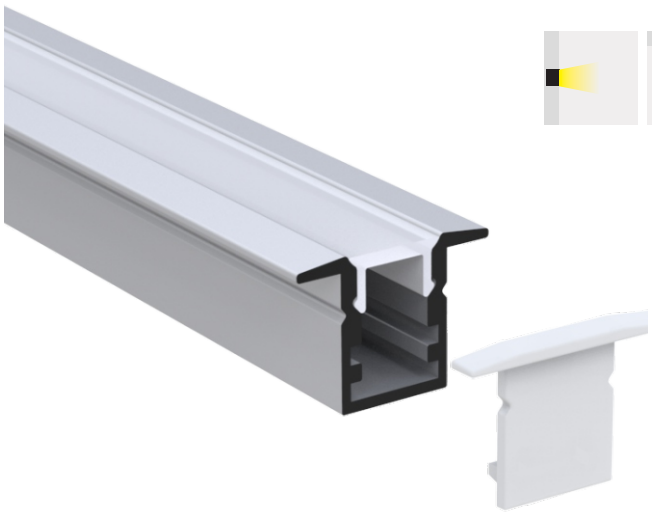

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
black/Prismatic Frosted



PMMA

diffused/opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

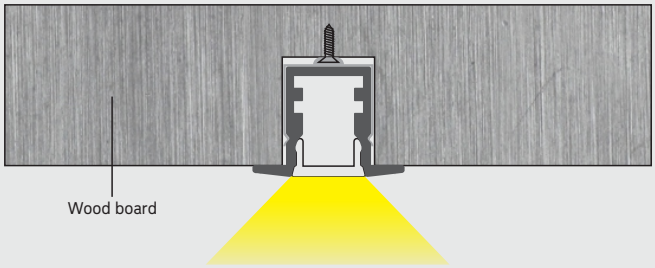

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	1300LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	1300LM/m

Effect Image



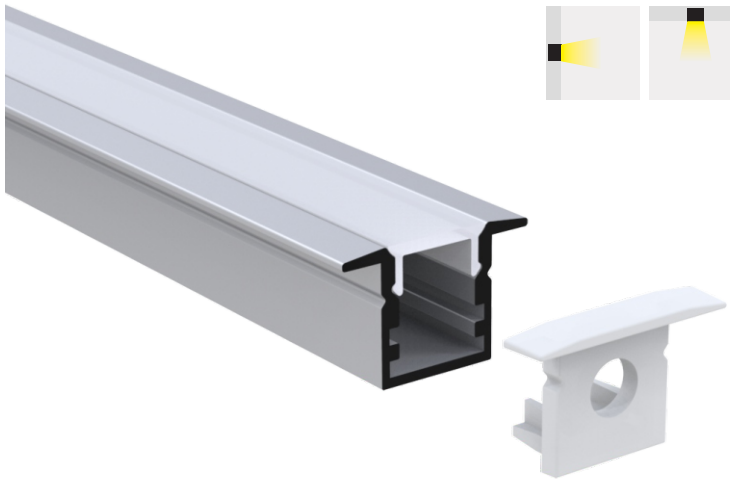

Types of Installation:

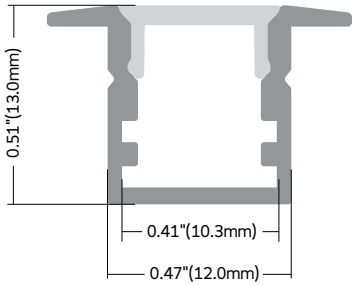

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear/black



PMMA

diffused

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

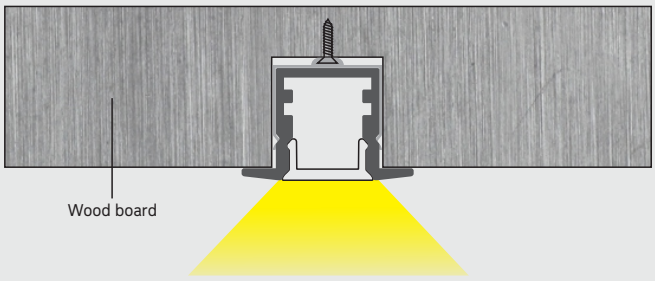

Effect Image



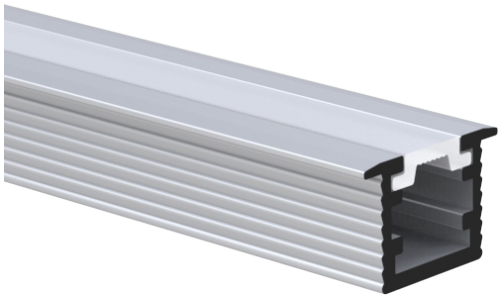

Types of Installation:





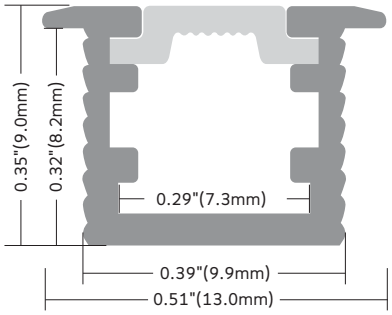

Profile color

Black

Silver

White

Profile Components



PC

diffused

Installation Accessories

End cap × 2



End cap with hole × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	1300LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	1300LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

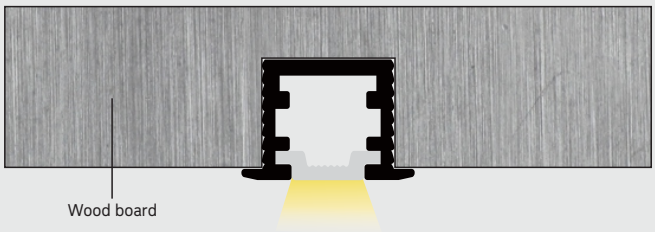

Effect Image



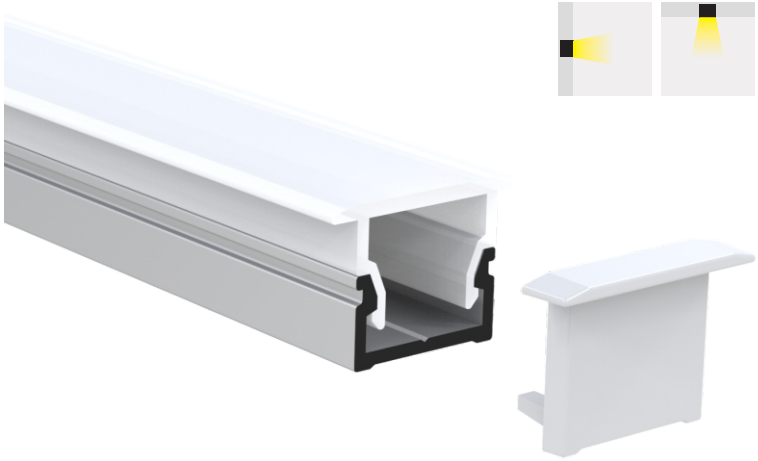

Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

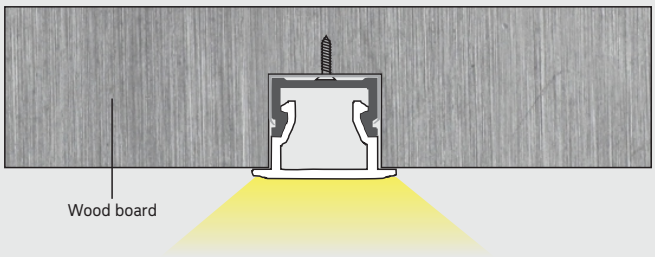

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

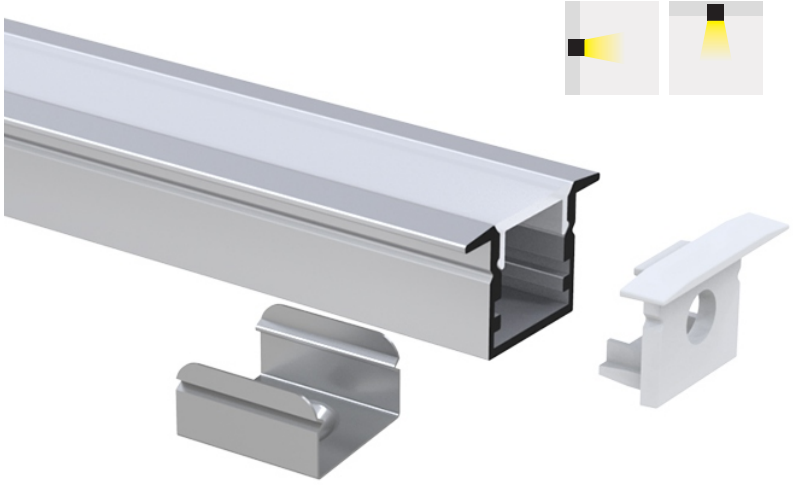

Types of Installation:

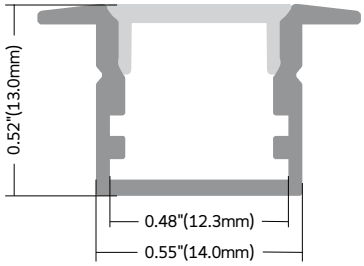

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear/black

PMMA

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

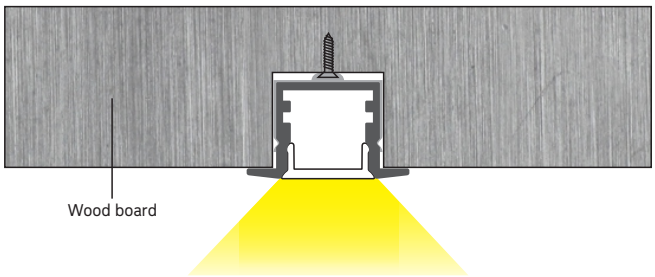

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installatlon:



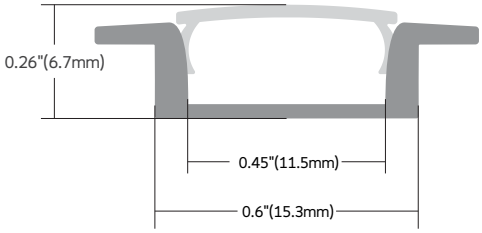

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

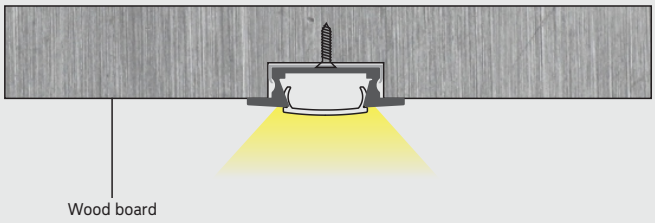

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



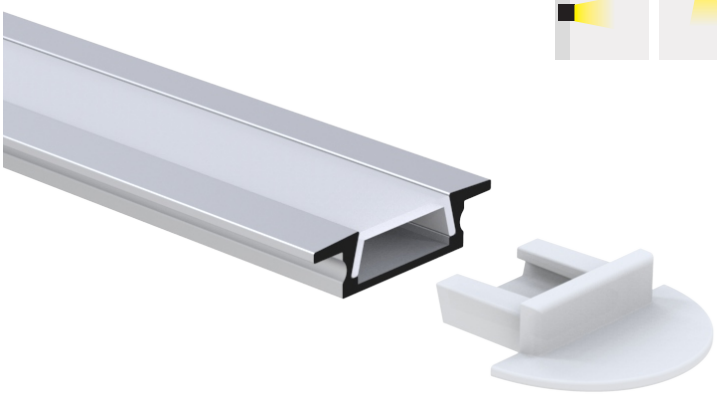

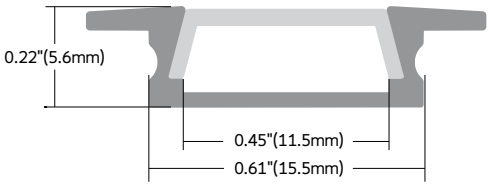

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black



PMMA

clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

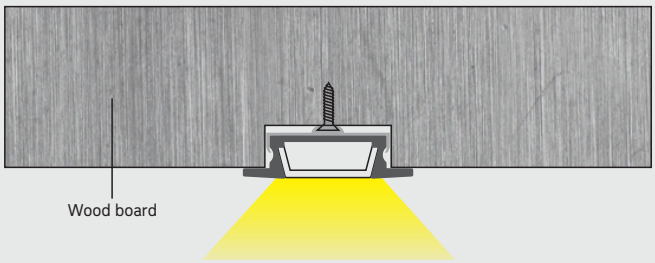

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installatlon:





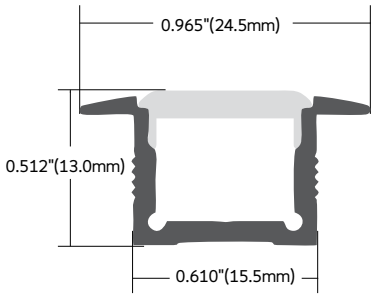

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

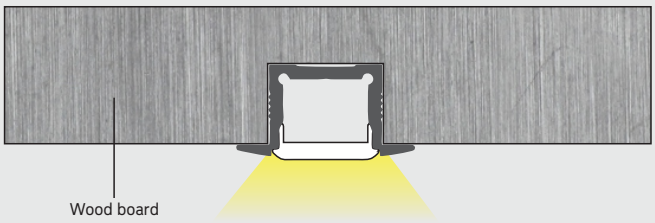

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

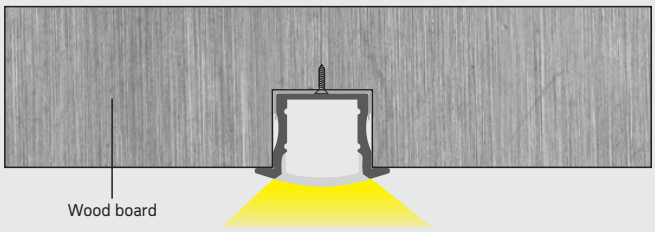

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

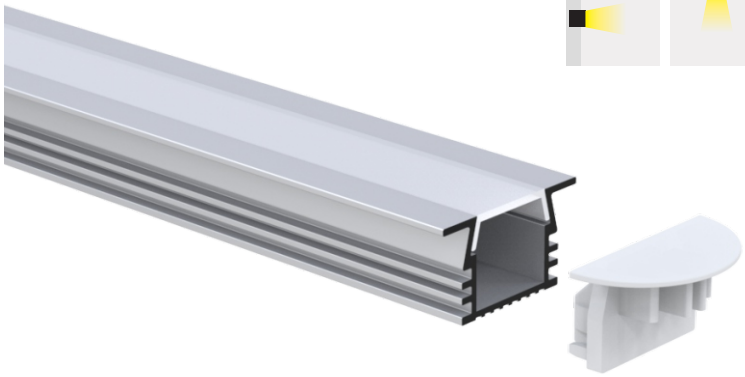

Types of Installation:

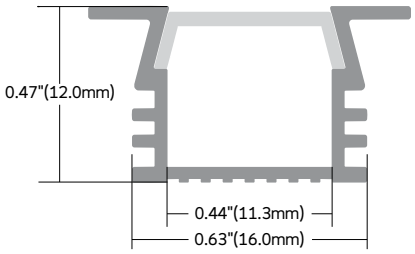

Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/
clear /black



PMMA
clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

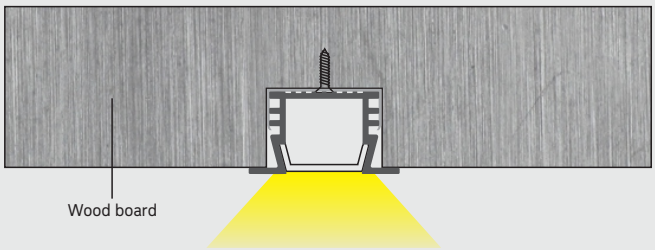

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installatlon:



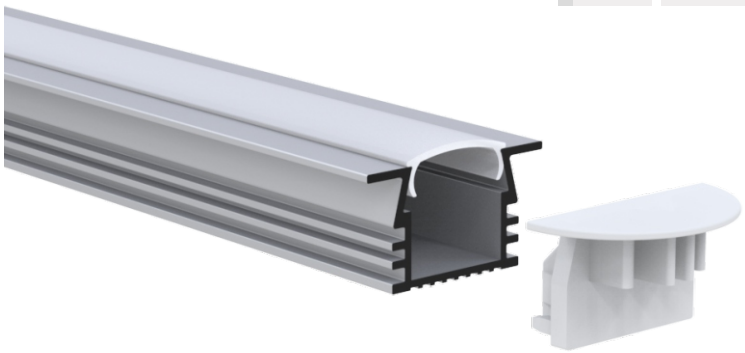

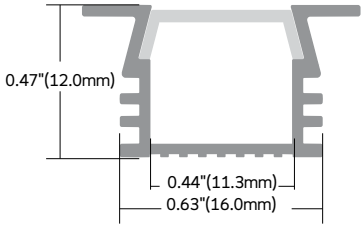

Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/clear/black



PMMA
clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

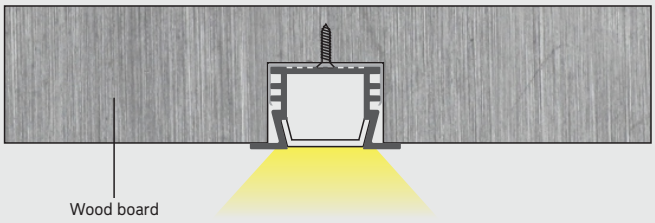

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

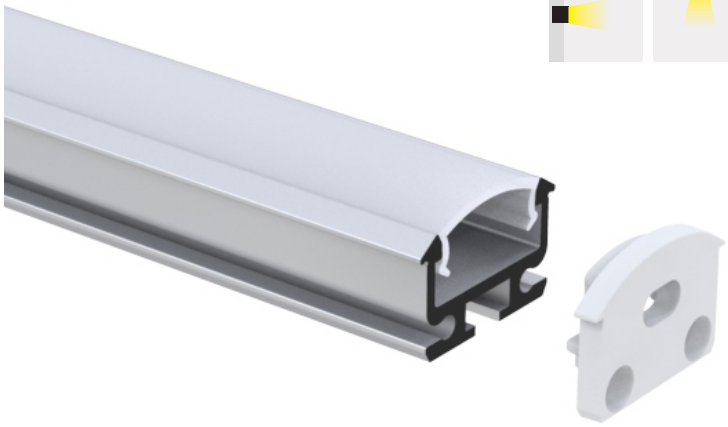

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

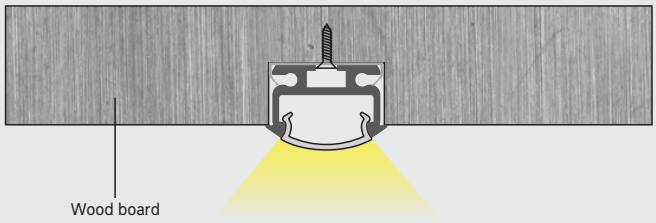

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

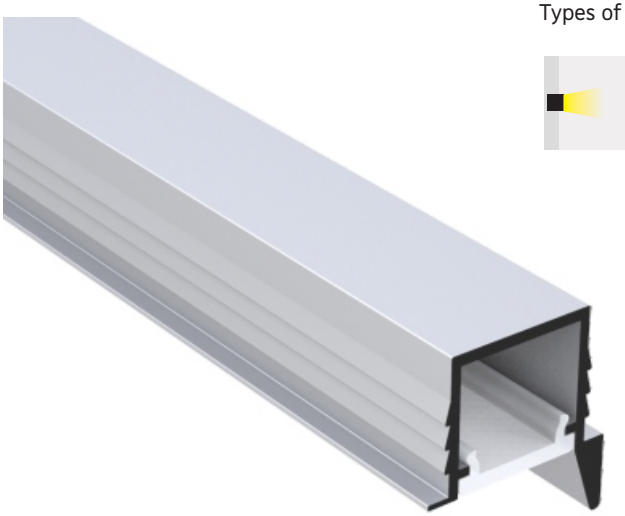

Types of Installation:



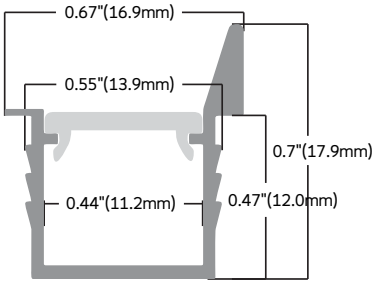

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

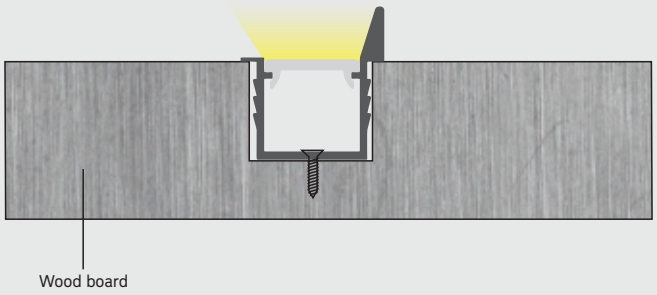

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

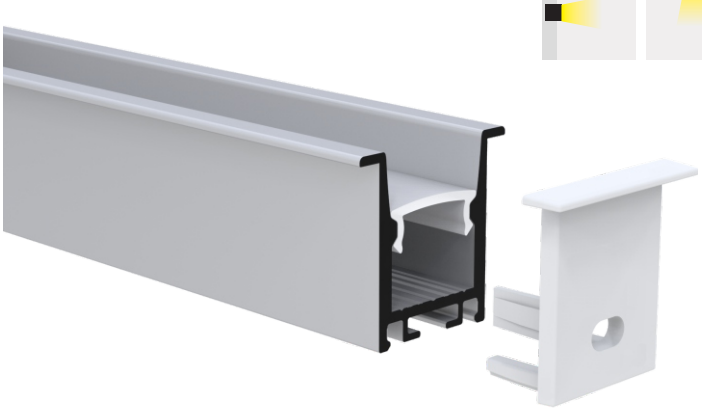

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

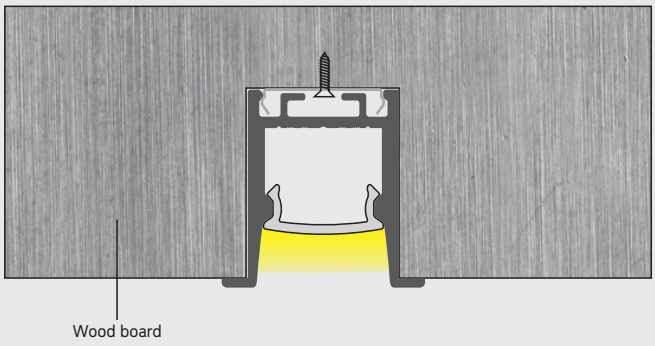

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



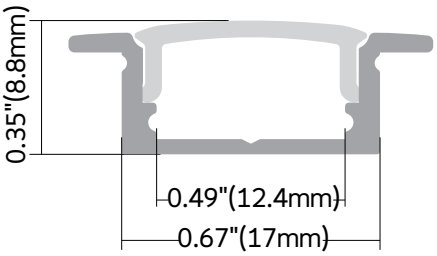

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

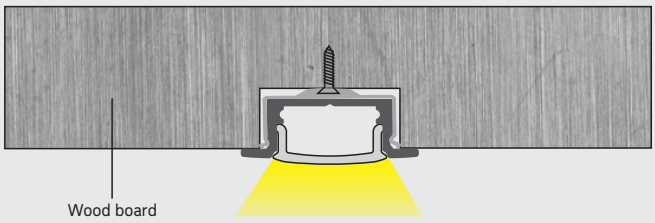

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

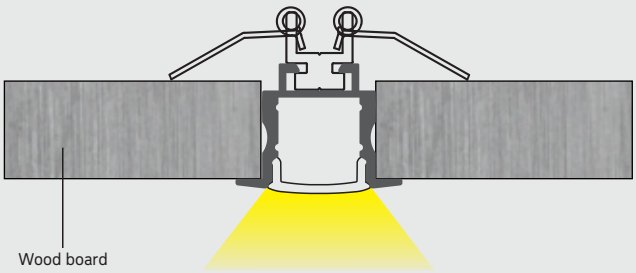

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m



Types of Installation:





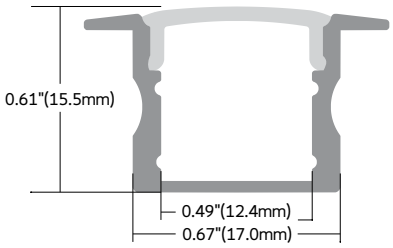

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/opal matte / black/Prismatic Frosted



PMMA

clear/diffused/ opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

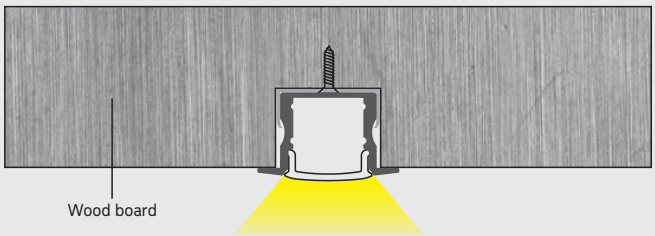

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



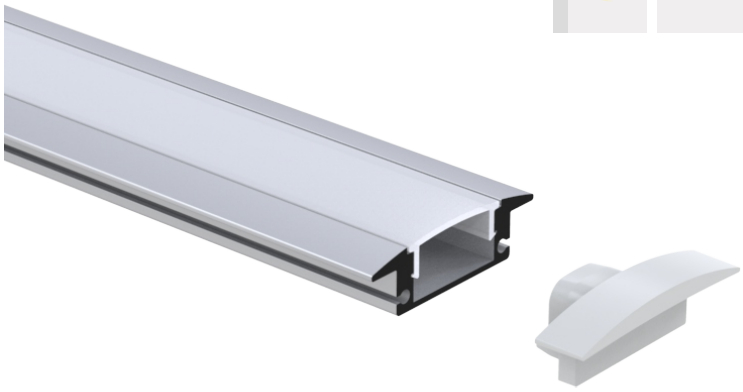

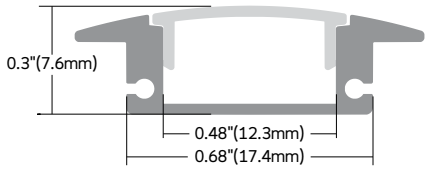

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black



PMMA

diffused/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

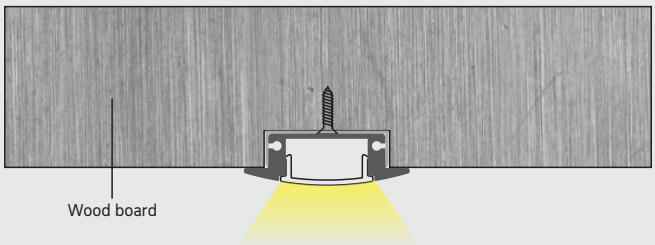

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



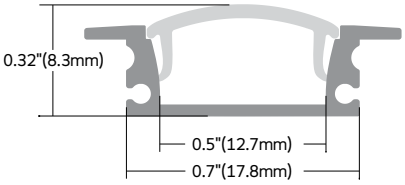



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

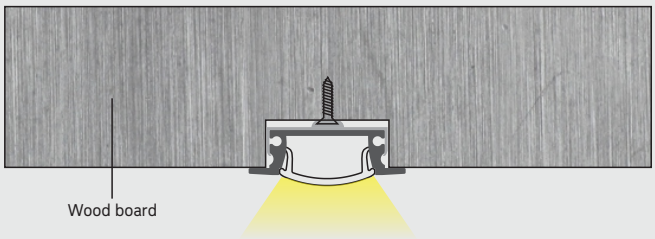

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black

Installation Accessories

End cap × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

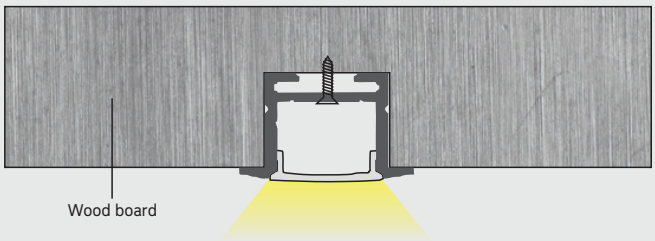



Types of Installation:

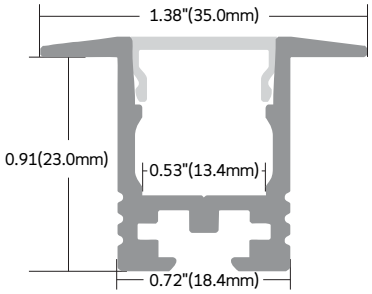

Profile color

Black

Silver

White

Profile Components



PC

diffused/
Prismatic Frosted

PMMA

opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

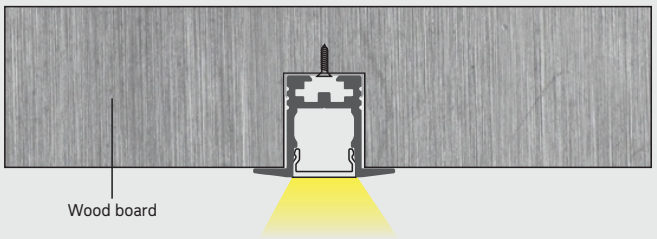

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

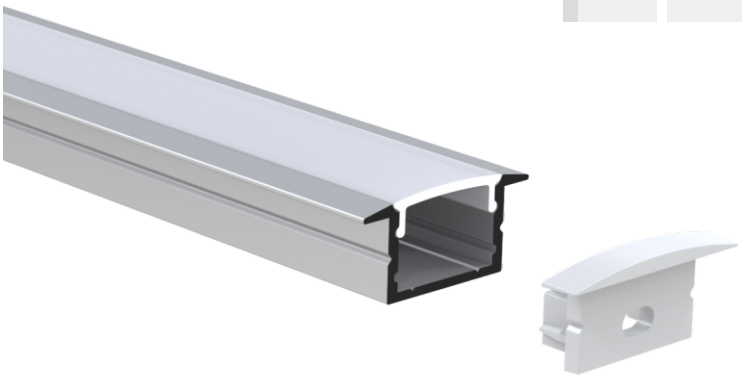

Types of Installation:



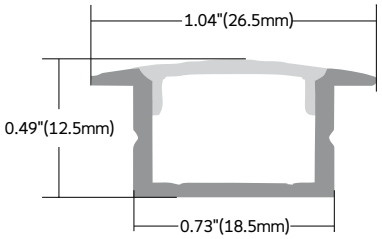

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

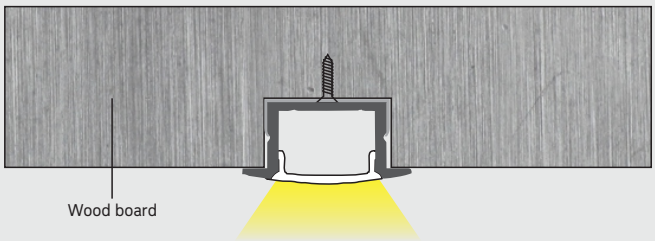

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:





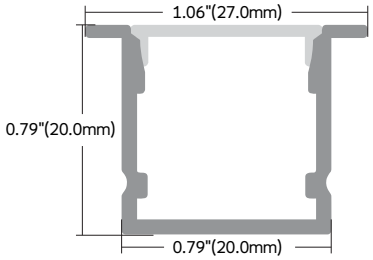

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

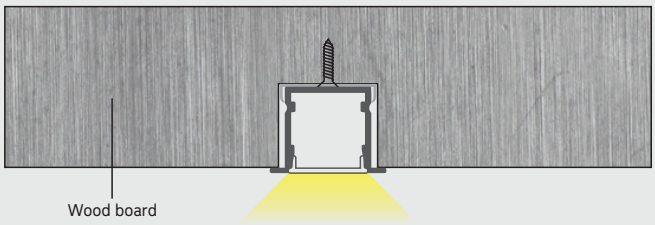

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



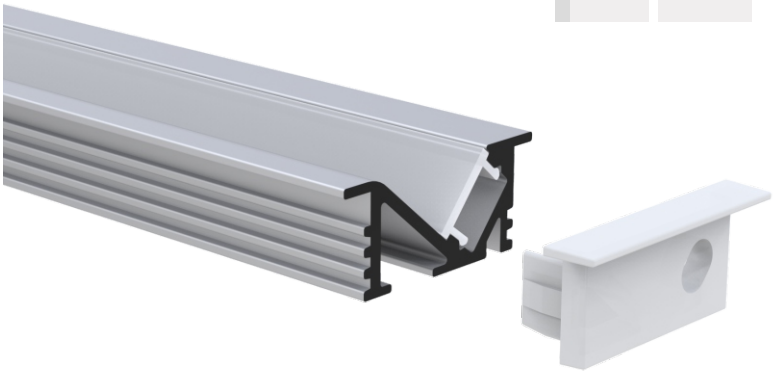

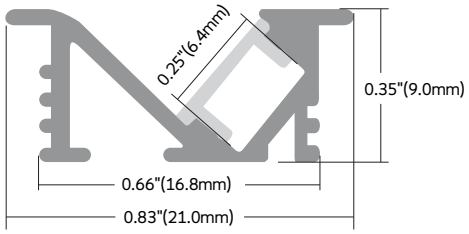

Profile color

Black

Silver

White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Effect Image



Types of Installatlon:







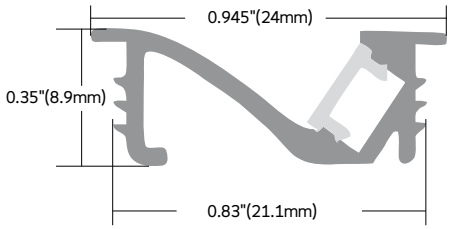

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

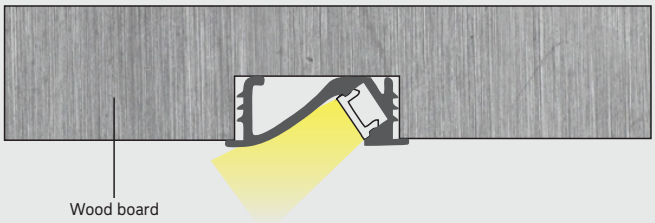

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

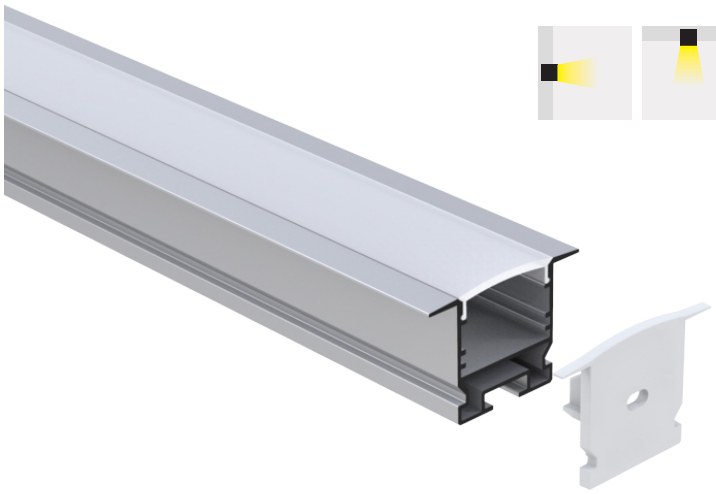

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

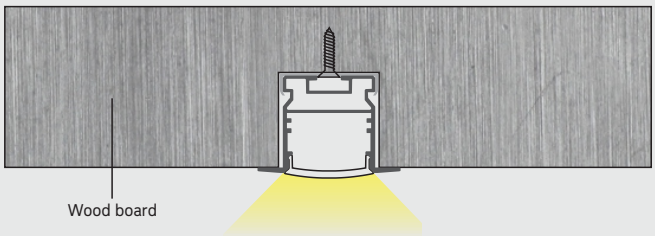

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installatlon:







Profile color

Black

Silver

White

Profile Components



PC

diffused/clear/
Prismatic Frosted



PMMA

opal matte/diffused/
clear/black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

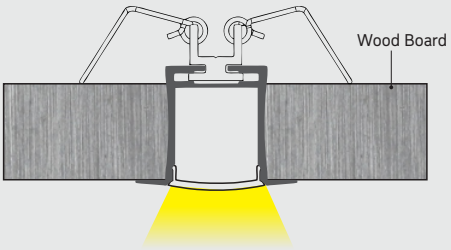

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2850LM/m

Types of Installation:



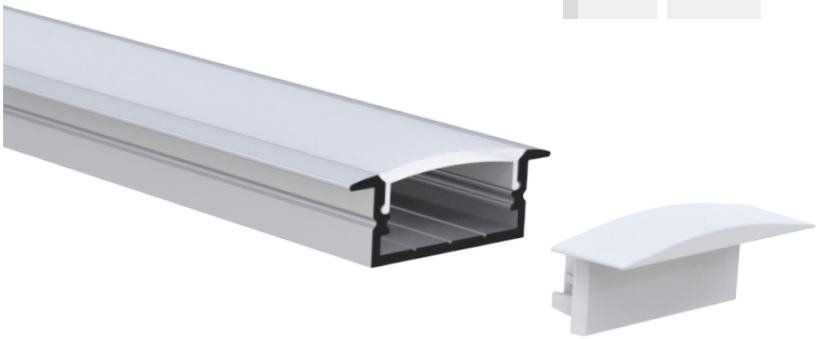

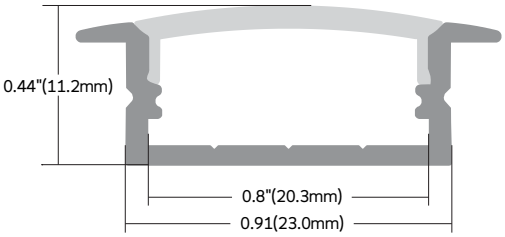

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

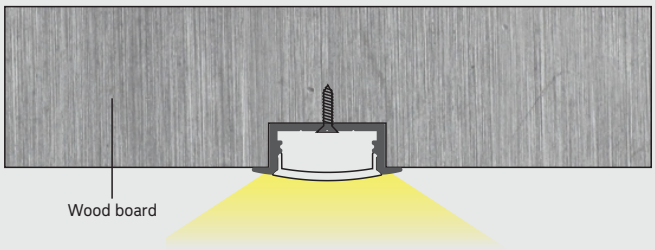

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:





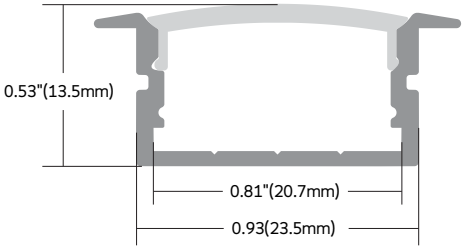

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

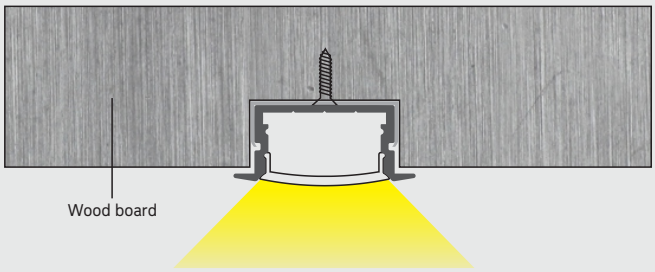

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

Black

Silver

White

Profile Components

PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

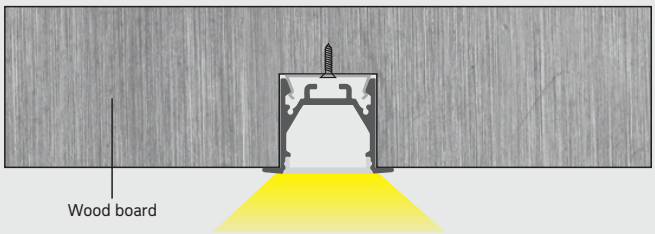

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





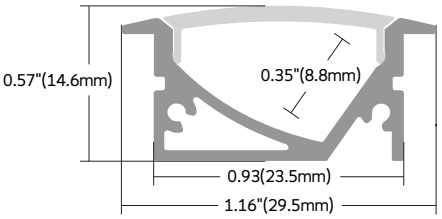

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
Prismatic Frosted



PMMA

clear/diffused/
opal matte /black

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

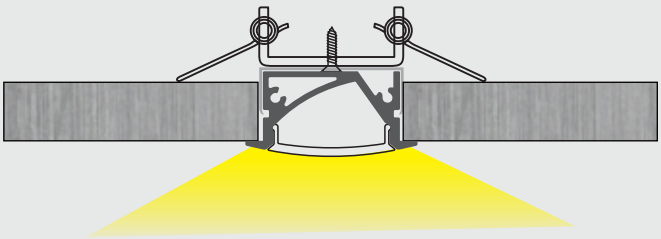

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

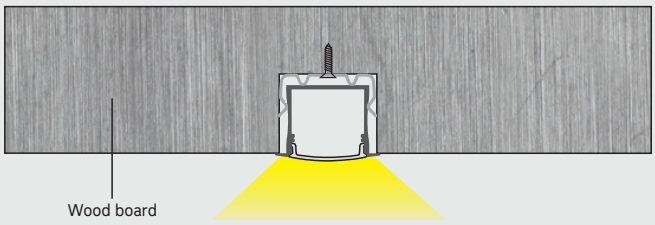

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:





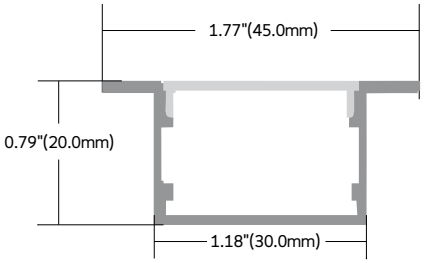

Profile color

Black

Silver

White

Profile Components



PC

diffuse/clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

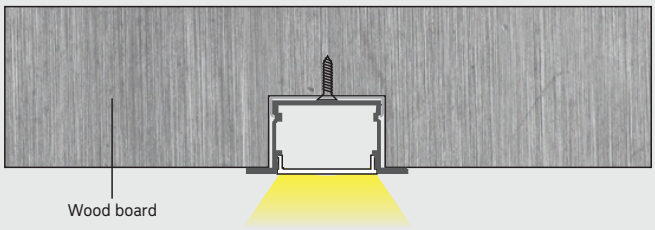

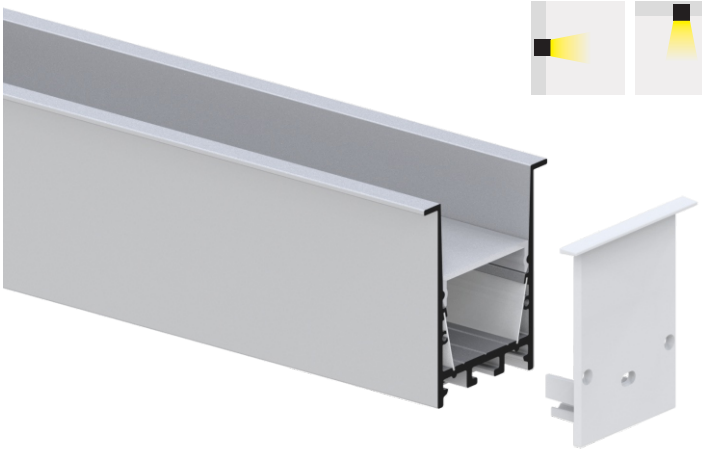

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
clear /black

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip





Structure Image

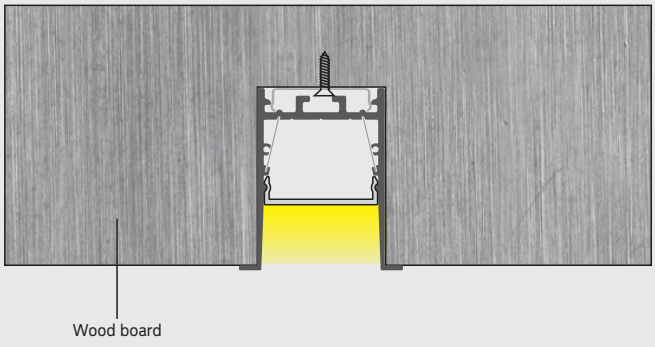

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Angular Mounting Series

Application



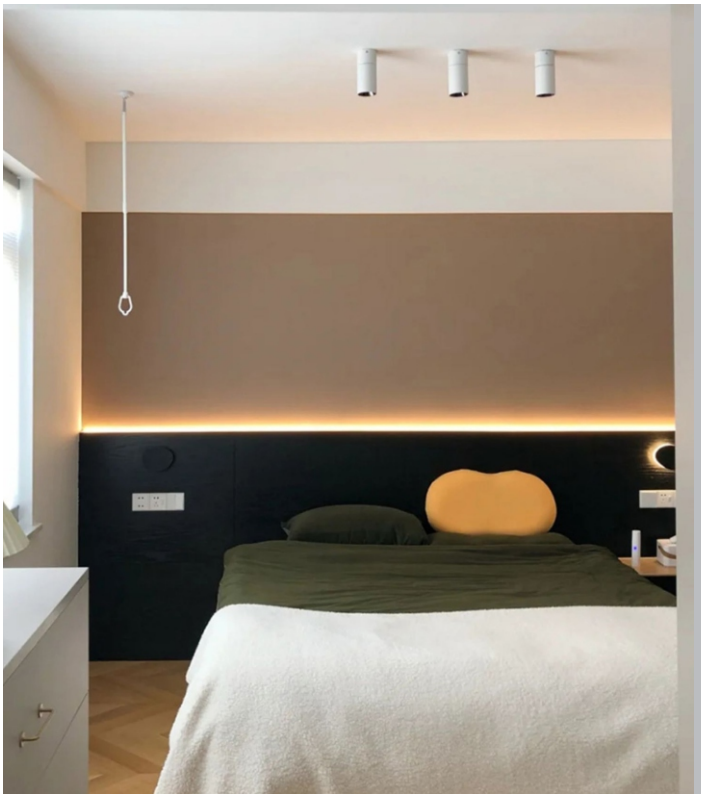



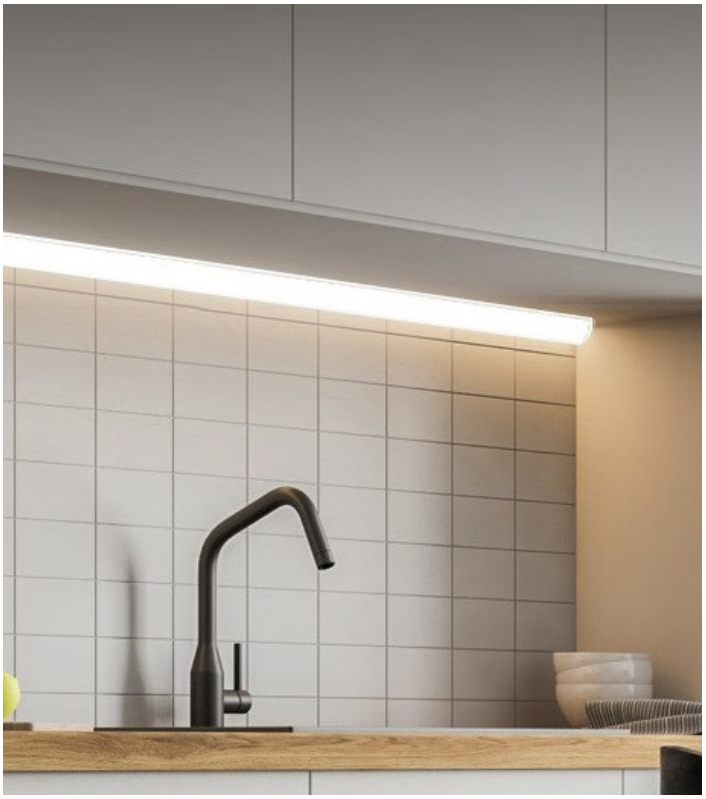



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

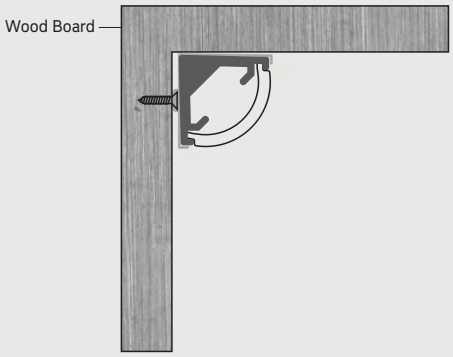

Effect Image

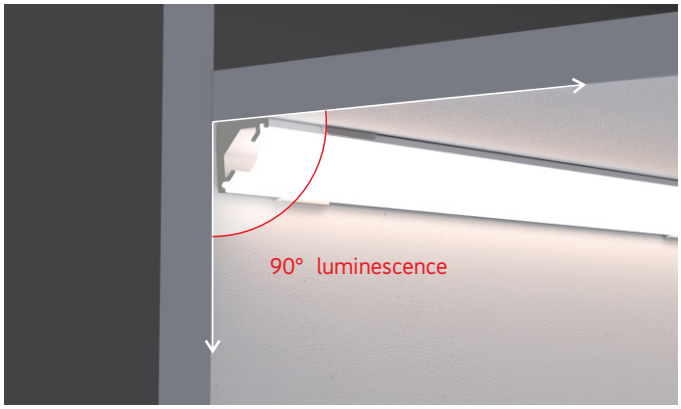

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	9.6W/m	677LM/m
BW2835-160-4MM	160LEDs	24V	14.4W/m	2160LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

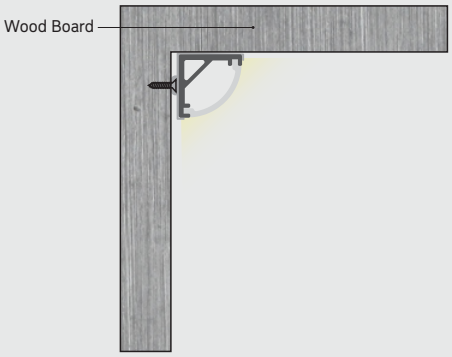

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

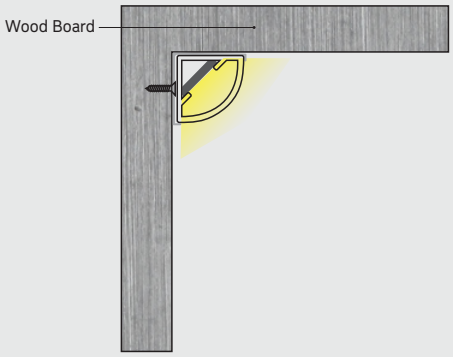

Effect Image

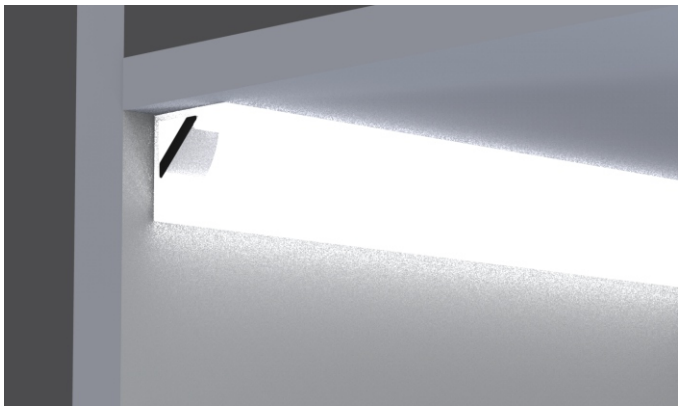

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Types of Installation:

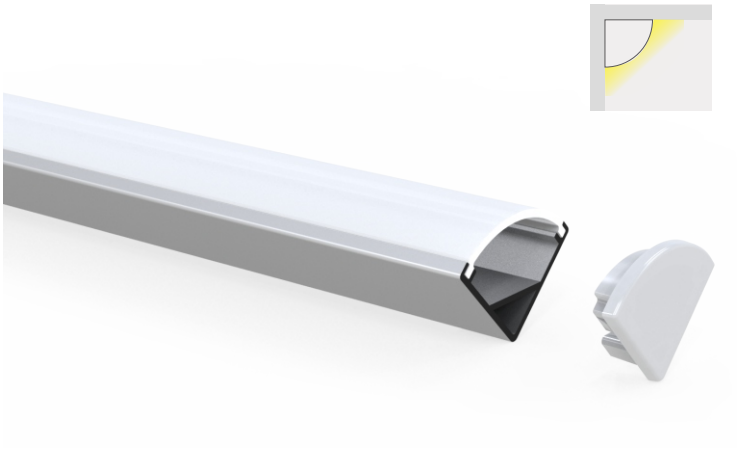



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/
opal matte /black



PMMA

diffused/
opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Connector



Structure Image

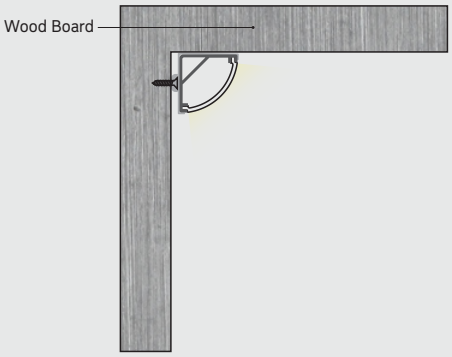

Effect Image

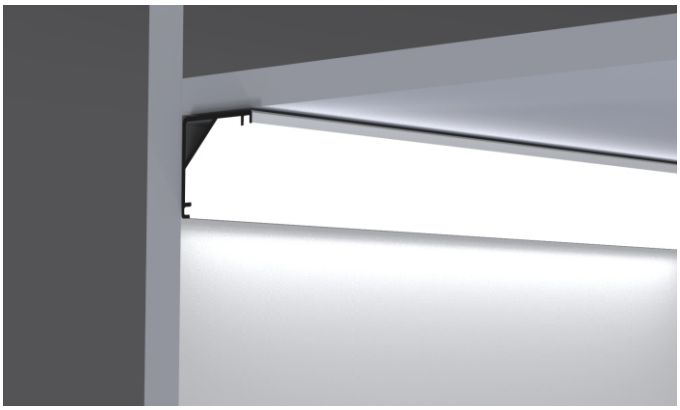

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

Black

Silver

White

Profile Components



PC

diffused/clear



PMMA

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

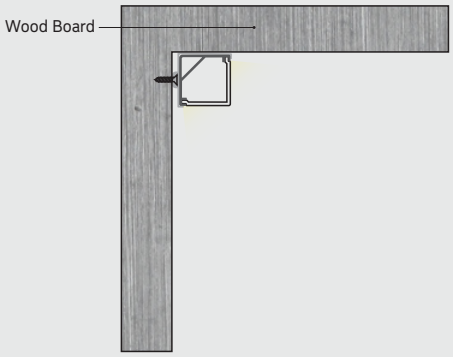

Effect Image

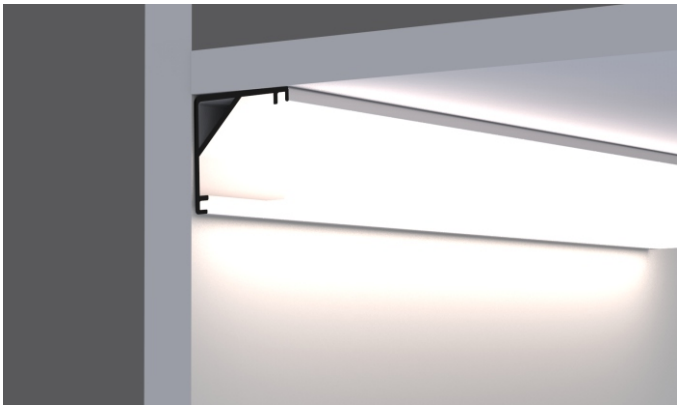

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

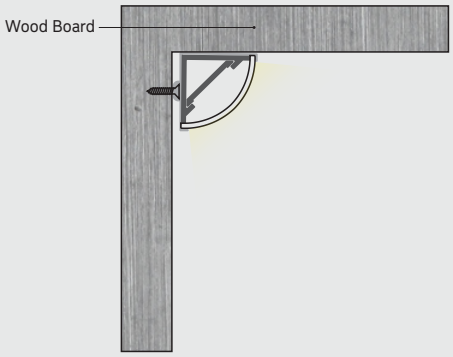

Effect Image

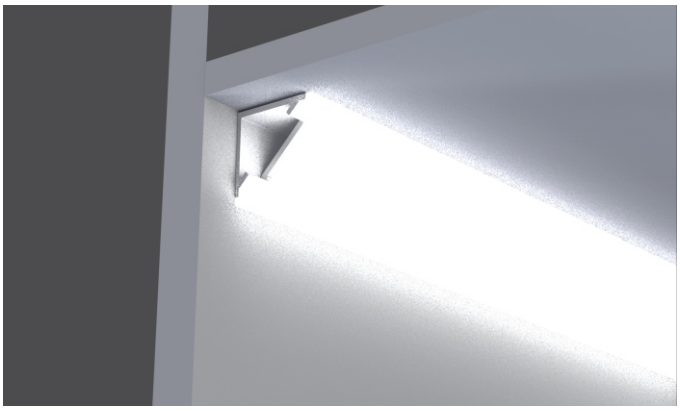

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	9.6W/m	1300LM/m

Types of Installatlon:



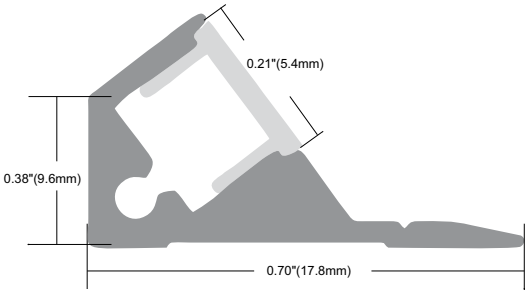

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte/diffused/black/
Prismatic Frosted

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

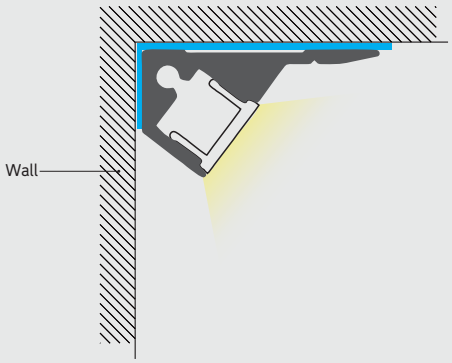

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



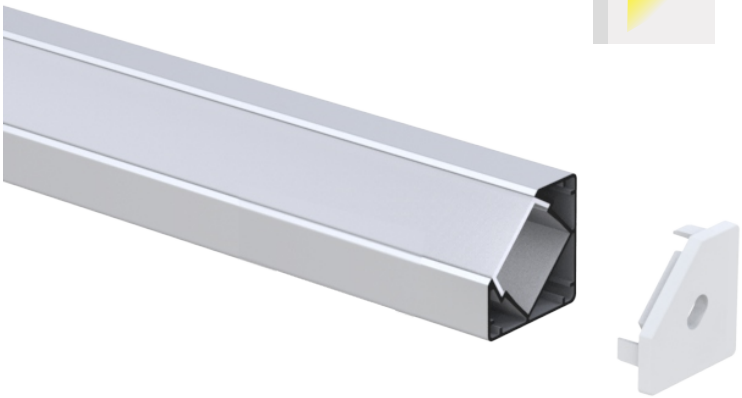



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

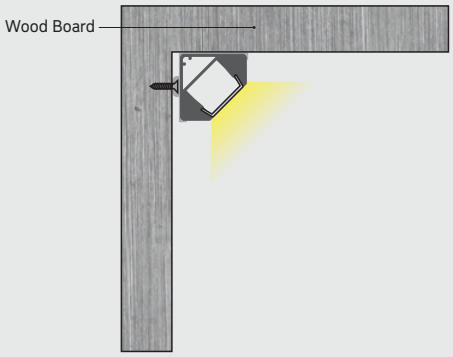

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

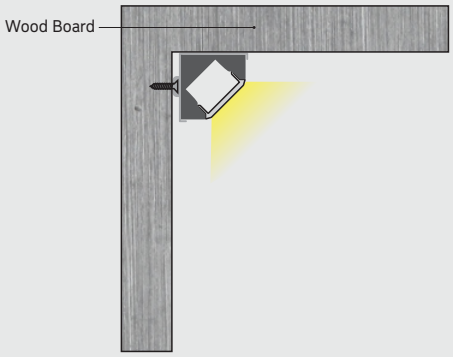

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:

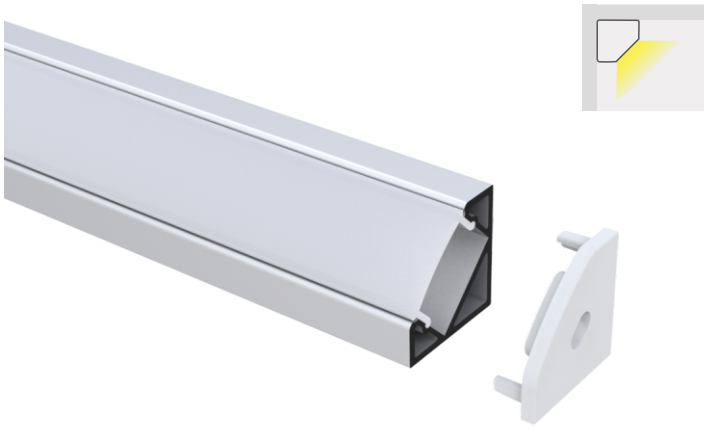



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



PMMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

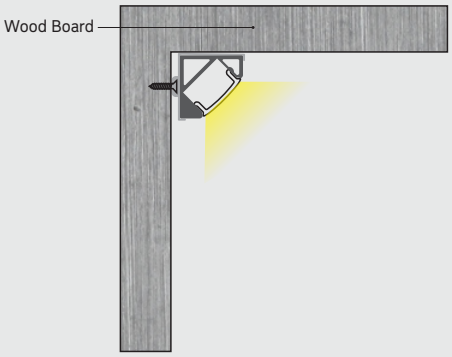

Effect Image

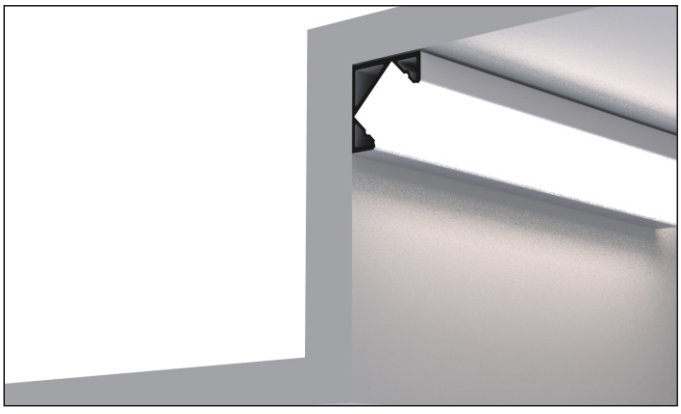

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



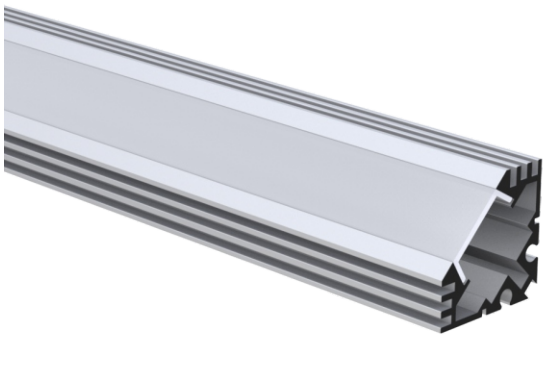



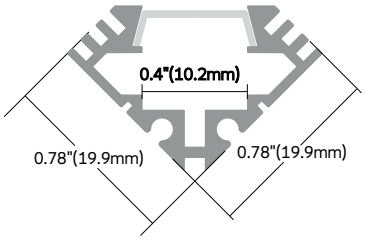

Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/clear/black



PMMA
clear

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

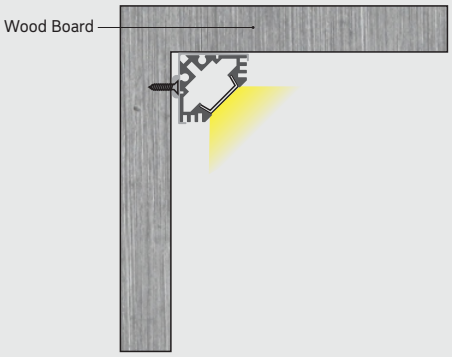

Effect Image

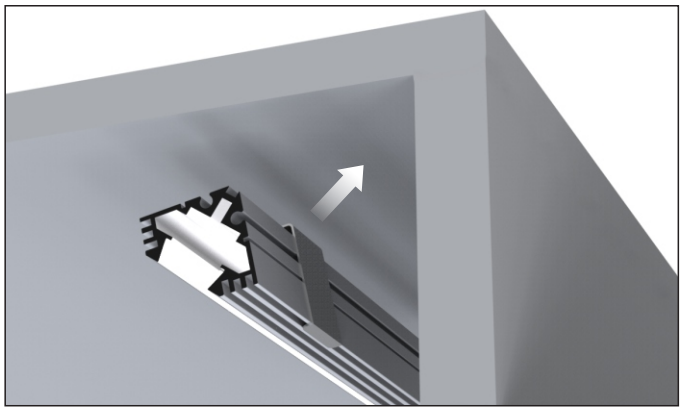

Types of Installation:



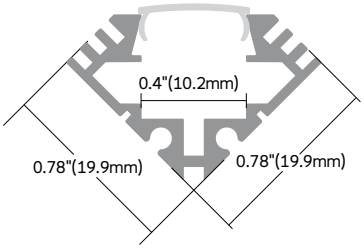

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

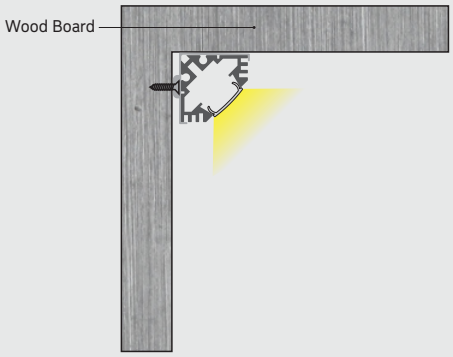

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
Prismatic Frosted

PMMA

opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

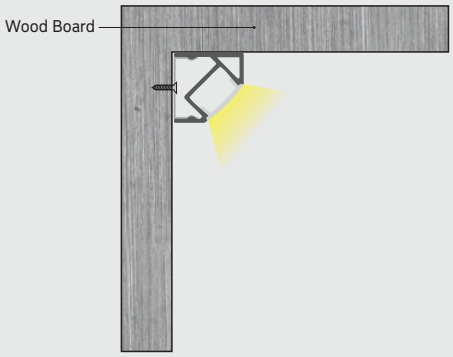

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Effect Image

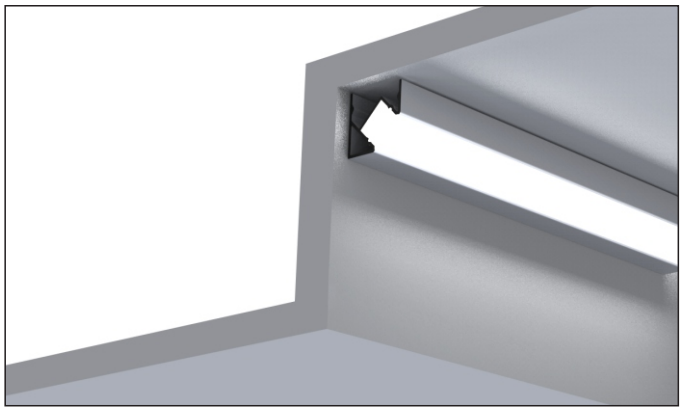

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components

PC

opal matte /diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

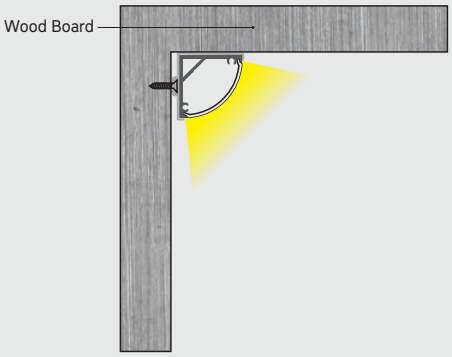

Effect Image

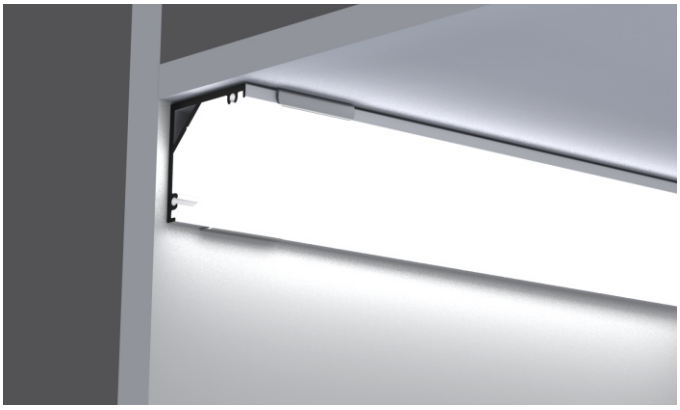

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





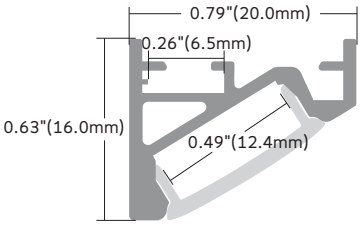

Profile color

Black

Silver

White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



PMMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

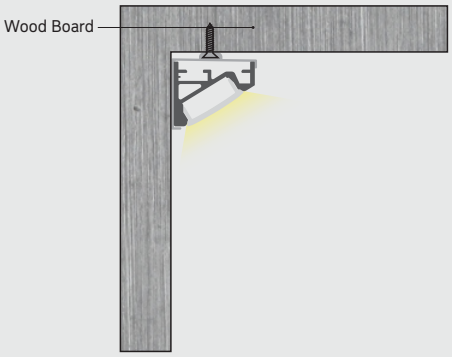

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:

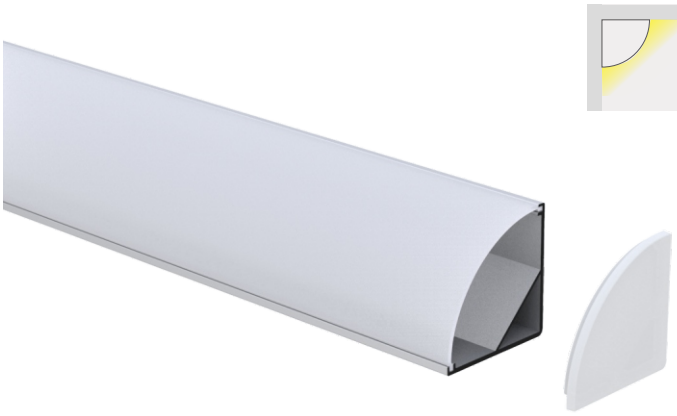



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /
diffused/clear/

PMMA

opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Connector



Structure Image

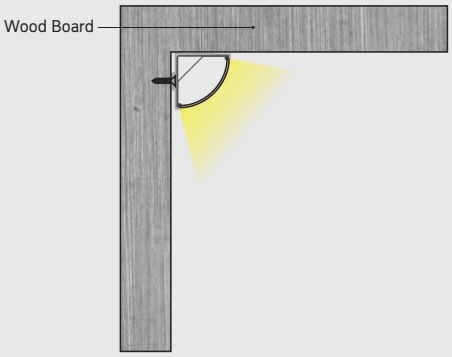

Effect Image

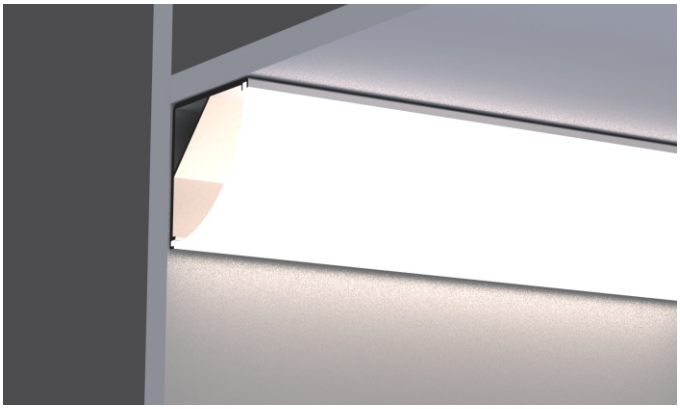

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/black

PMMA

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	12V/24V	20W/m	2085LM/m

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

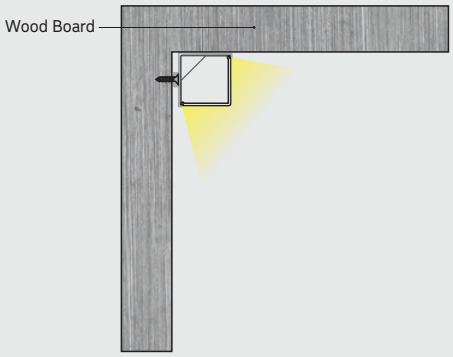

Effect Image

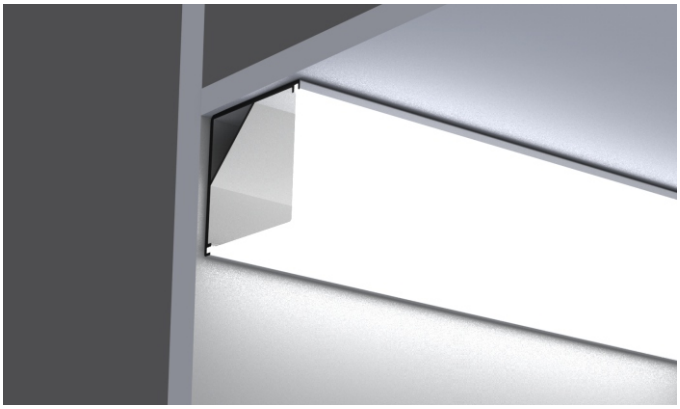

Types of Installation:



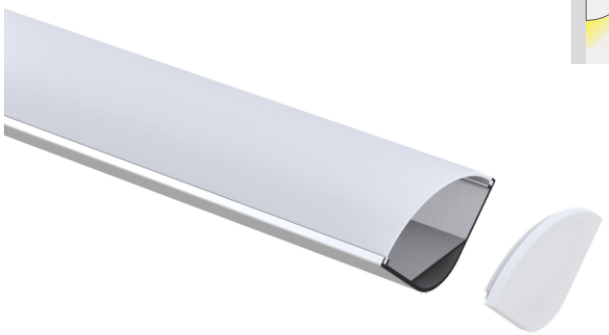



Profile color

Black

Silver

White

Profile Components



PC

opal matte / diffused/clear/

PMMA

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Connector



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

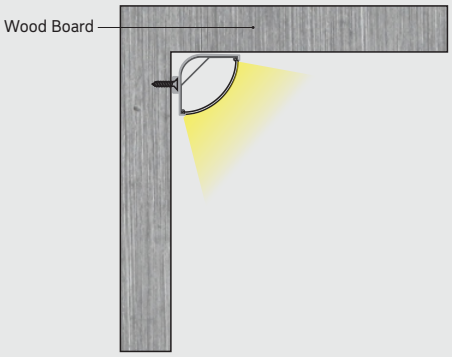

Effect Image



Types of Installation:



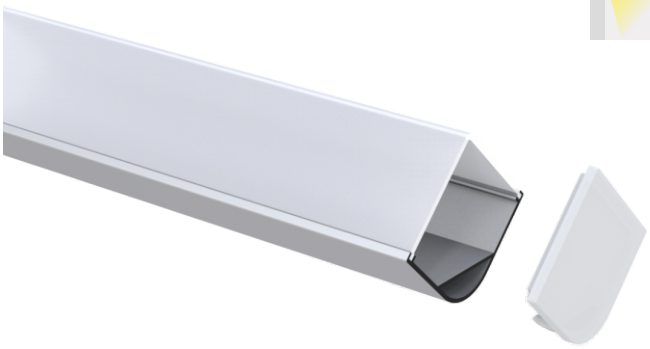



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/black

PMMA

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

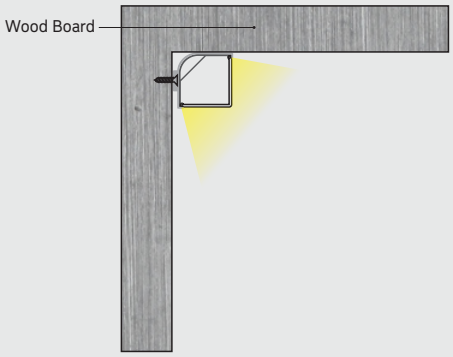

Effect Image

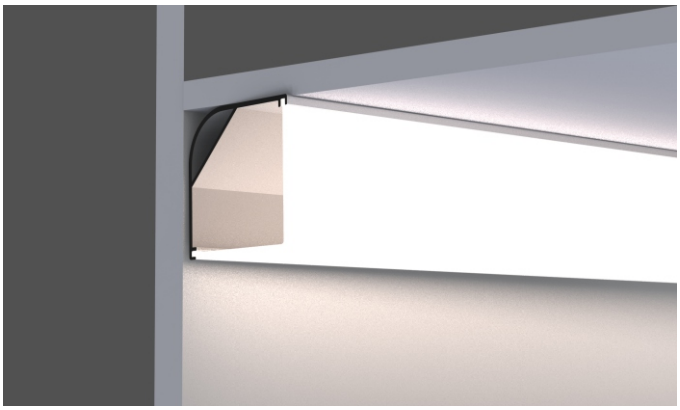

L053C

Angular Mounting Series

Types of Installation:





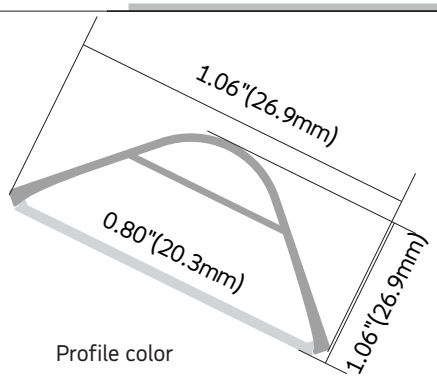

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Angular Mounting
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

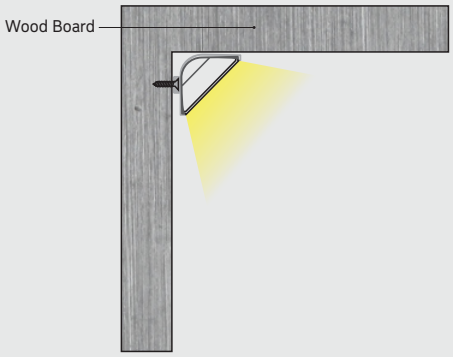

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

Lens Series

Application





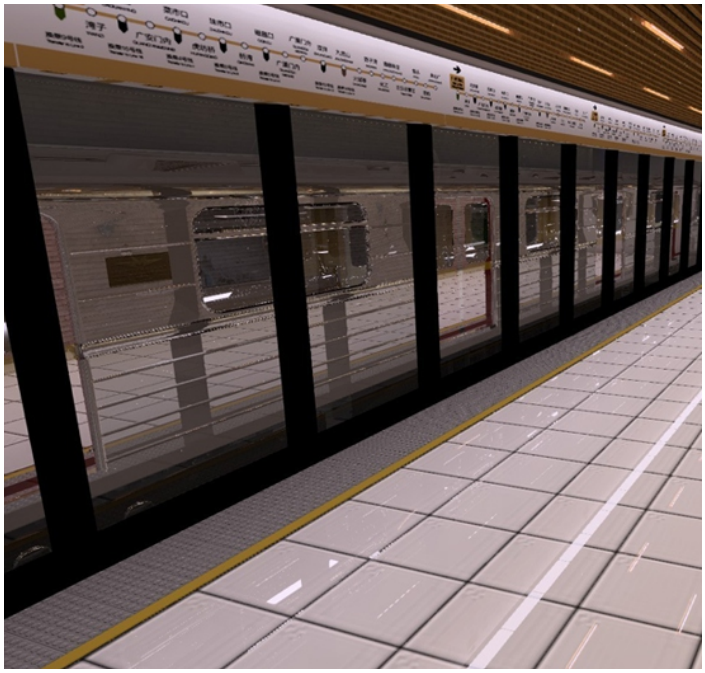





Types of Installation:





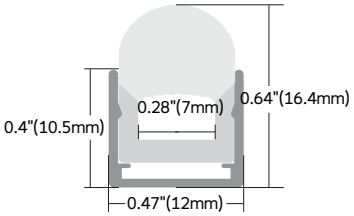

Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



End Caps

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

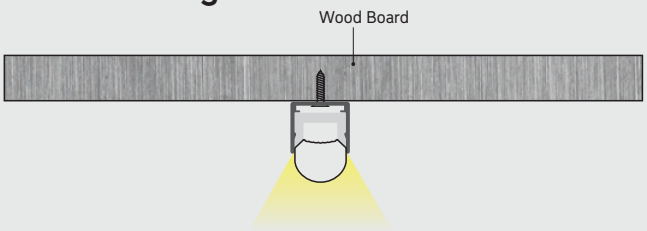

Light distribution curve

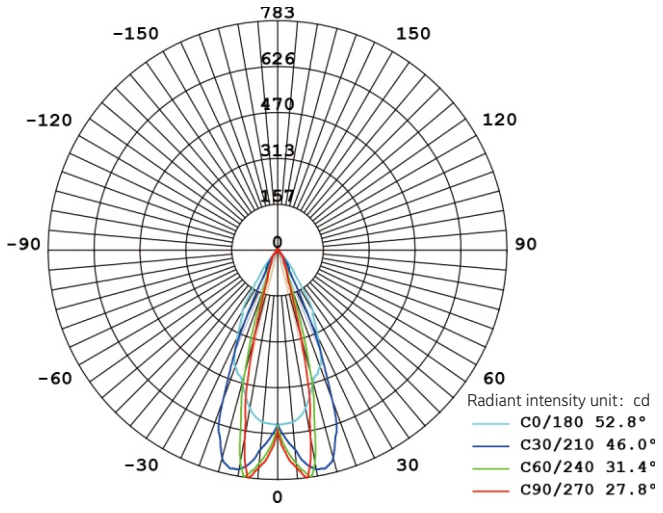

Average beam angle (50%): 46.5 degrees

Light intensity distribution curve

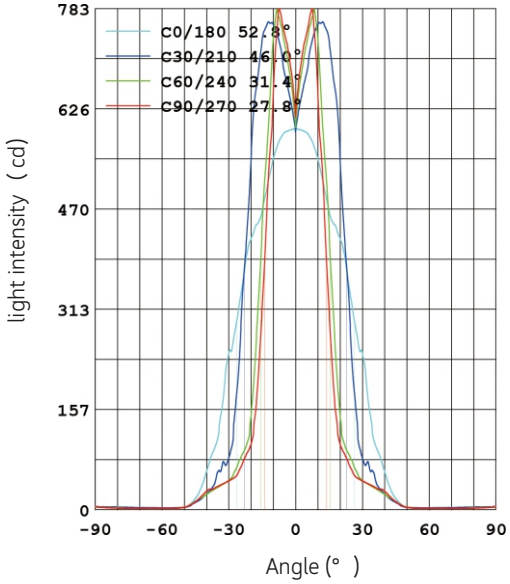

Types of Installatlon:



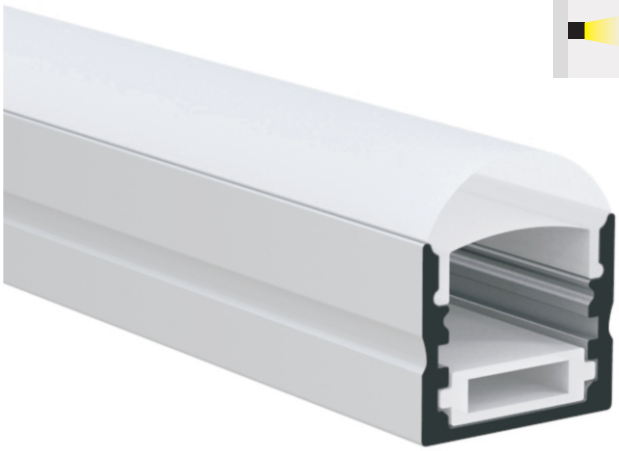



Profile color

Black

Silver

White

Profile Components



PC

clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Structure Image

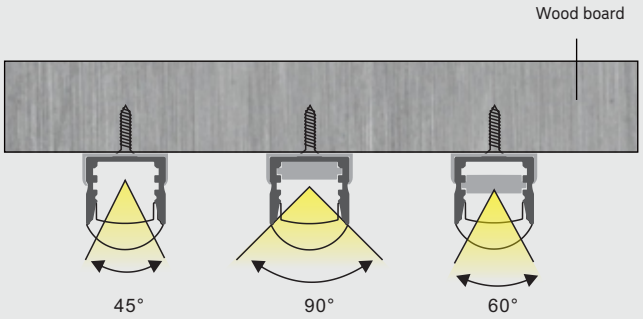

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



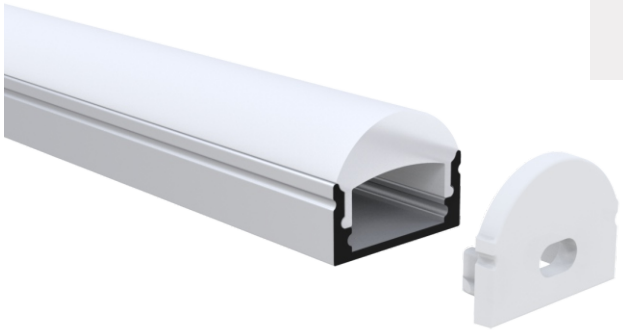



Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



Installation Accessories

Mounting clip







Connector





Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

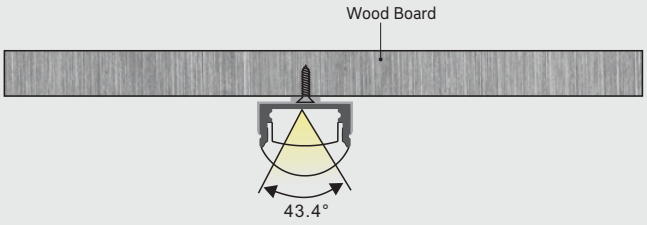

Light distribution curve

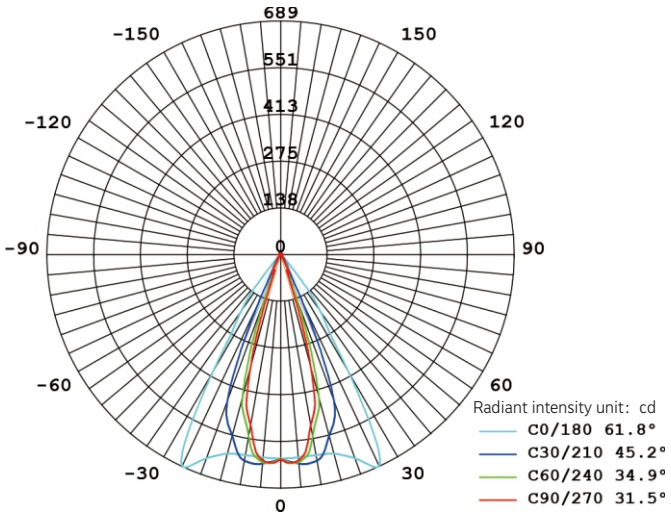

Average beam angle (50%): 43.4 degrees

Light intensity distribution curve

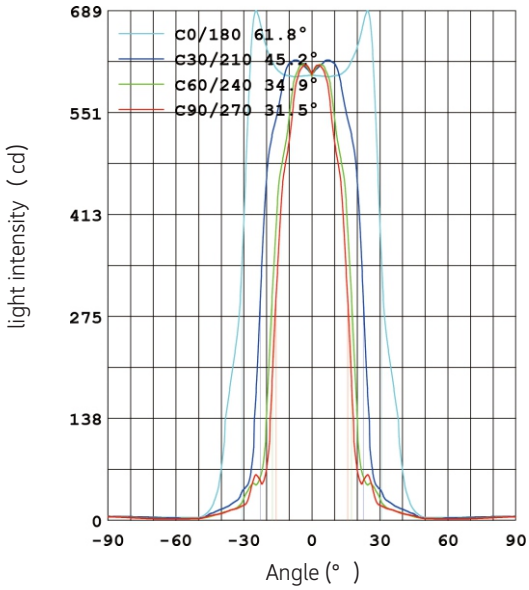

L101B

Types of Installation:





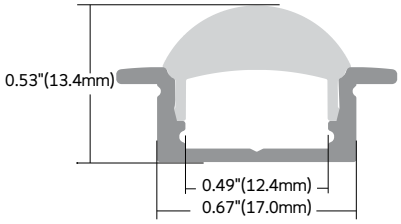

Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



End Caps



Mounting clip

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

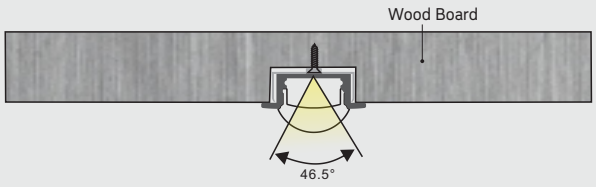

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Light distribution curve

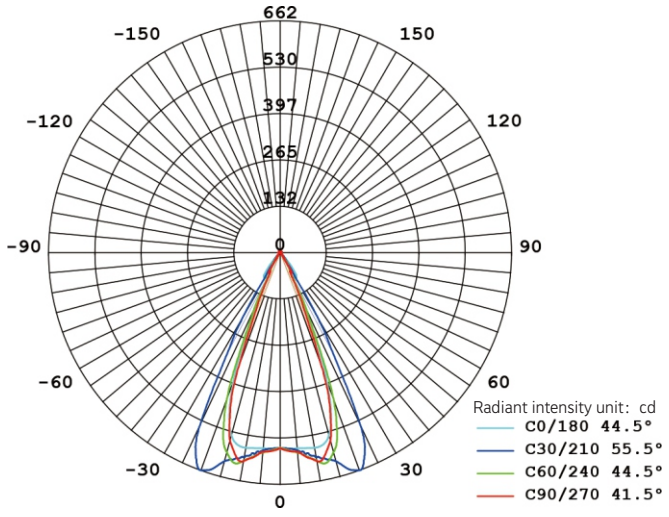

Average beam angle (50%): 46.5 degrees

Light intensity distribution curve

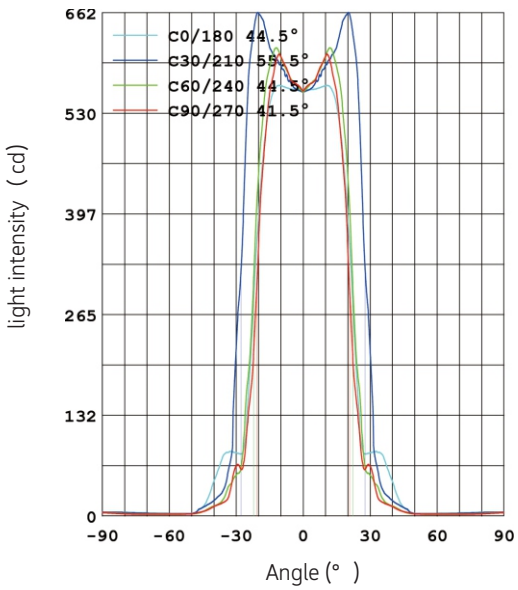

Types of Installation:

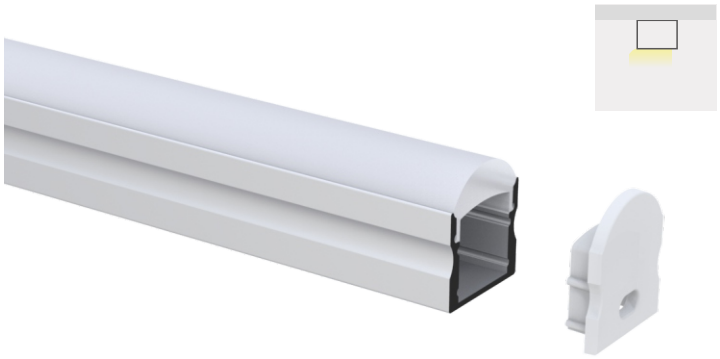



Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



End Caps



Mounting clip



Mounting clip

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

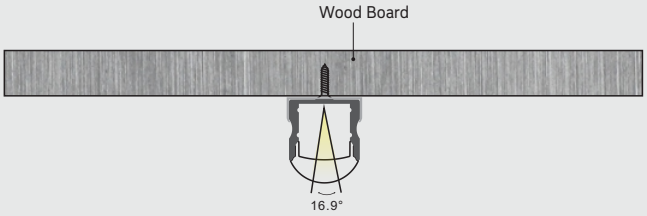

Light distribution curve

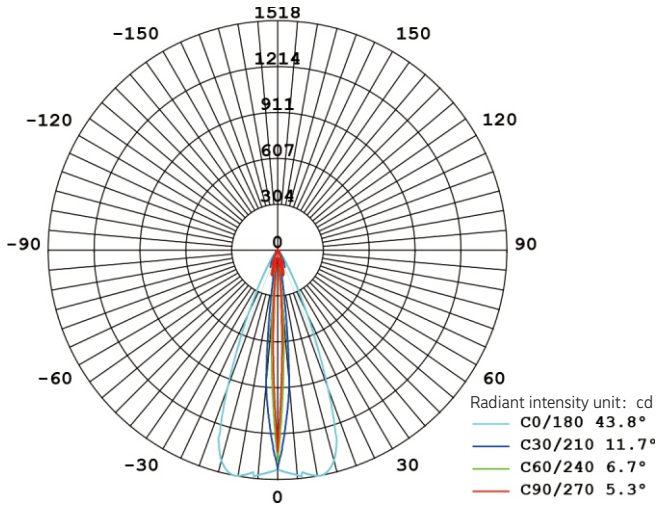

Average beam angle (50%): 16.9 degrees

Light intensity distribution curve

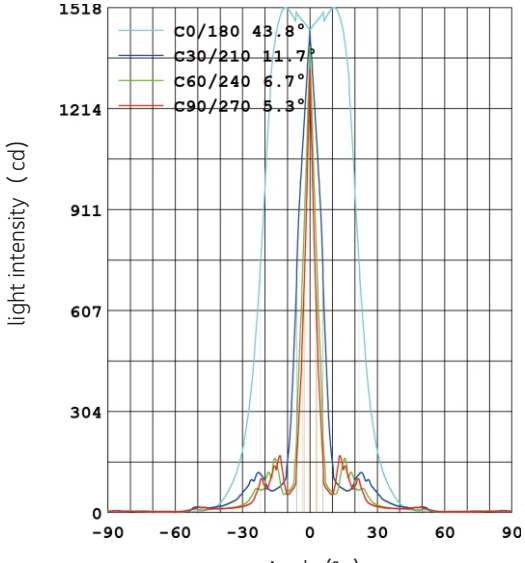

Types of Installation:







Profile color

Black

Silver

White

Profile Components

Lens

Installation Accessories



End Caps

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

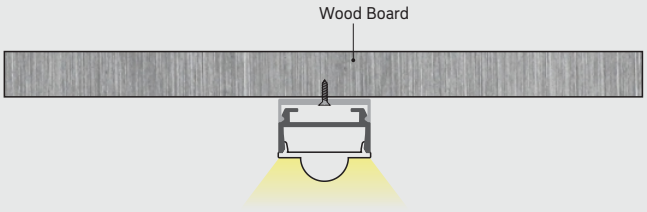

Light distribution curve

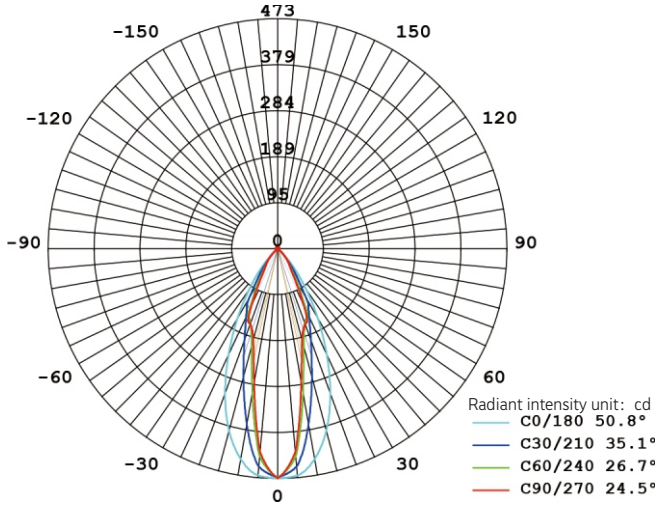

Average beam angle (50%): 34.3 degrees

Light intensity distribution curve

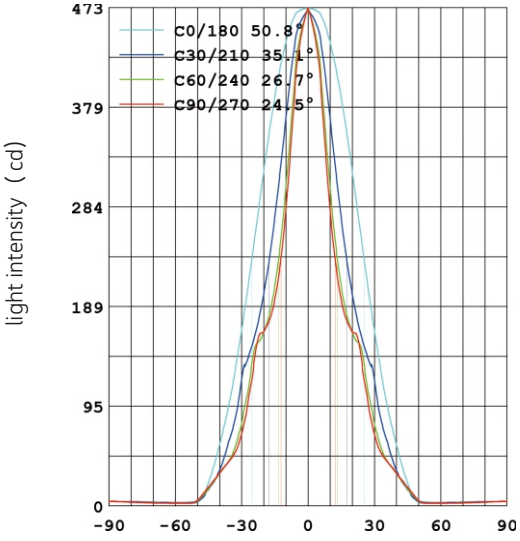

Types of Installation:



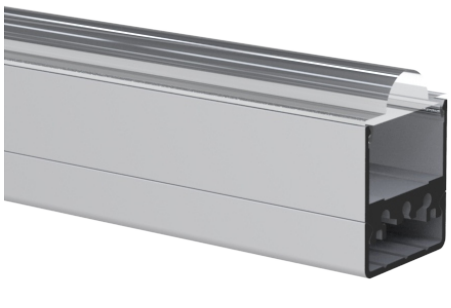





Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



End Caps

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

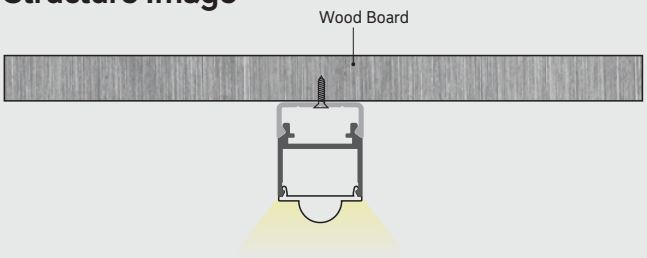

Light distribution curve

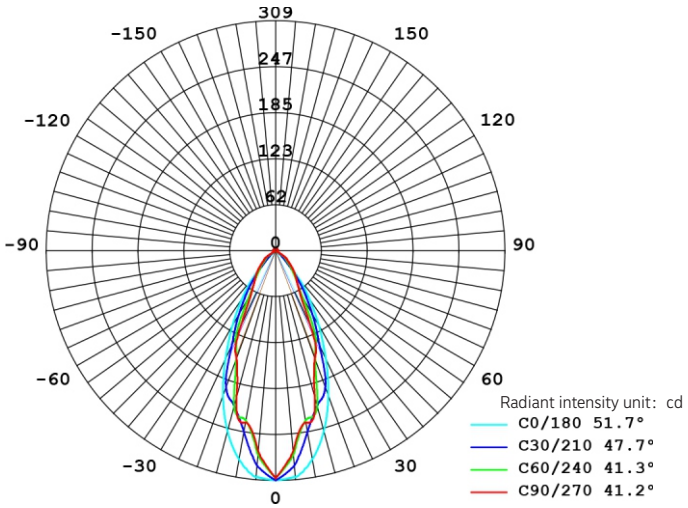

Average beam angle (50%): 44.4 degrees

Light intensity distribution curve

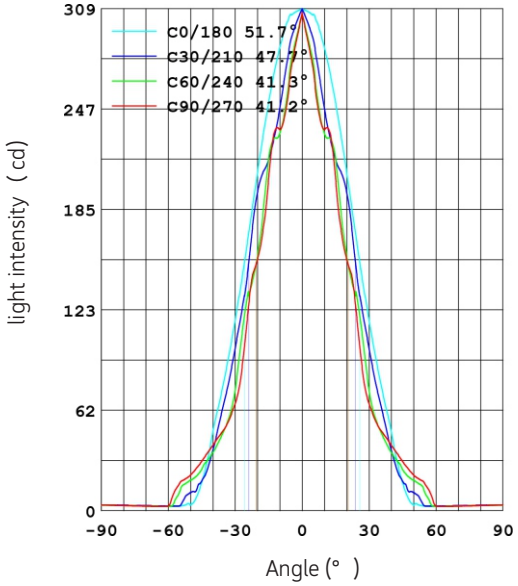

L097D

Types of Installation:



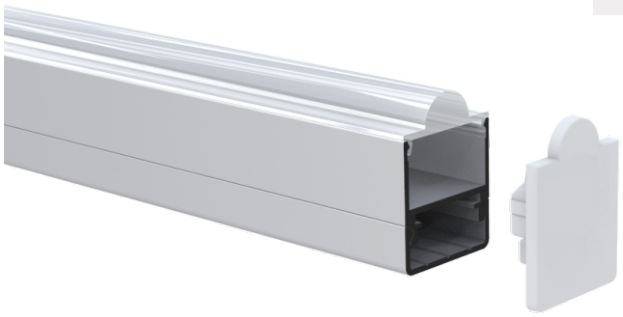



Profile color

- Black
- Silver
- White

Profile Components



Lens

Installation Accessories



End Caps

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

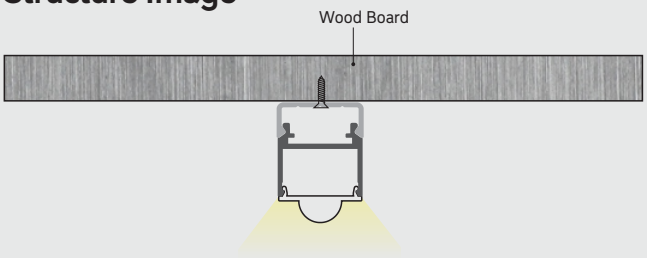

Light distribution curve

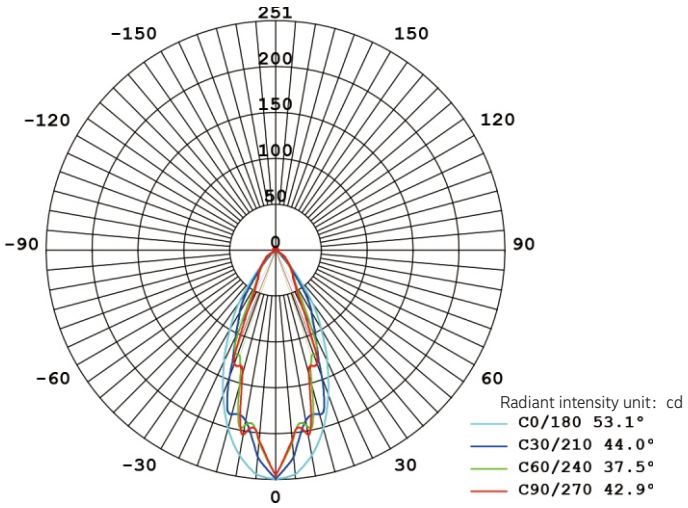

Average beam angle (50%): 44.4 degrees

Light intensity distribution curve

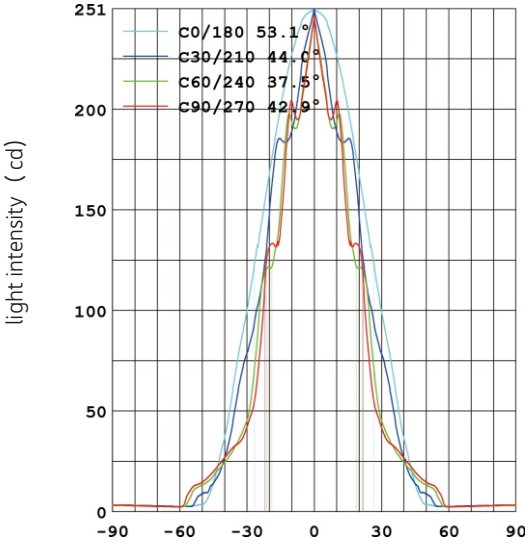

Magnetic Installation Series

Application







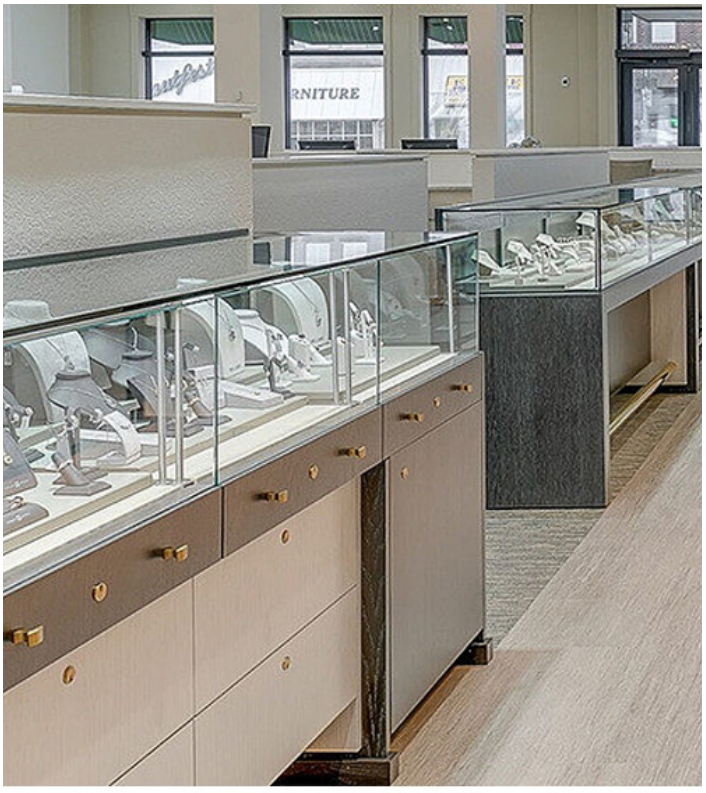



Types Of Lnstallation:



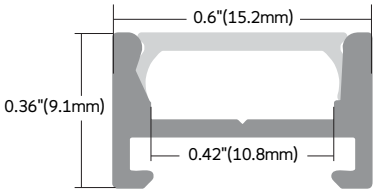

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

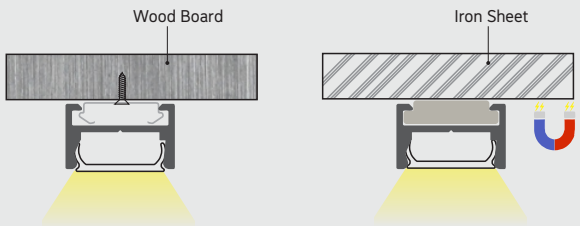

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



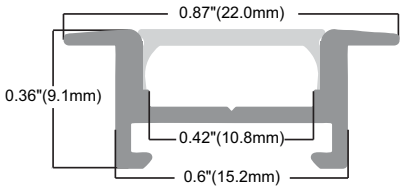

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

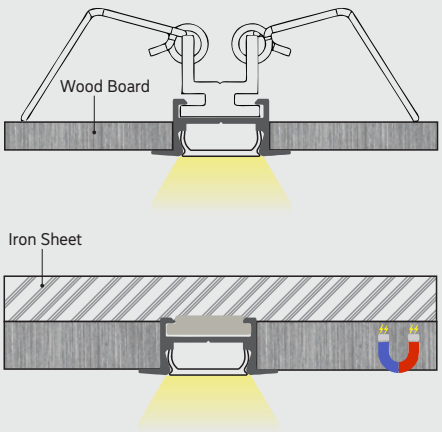

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



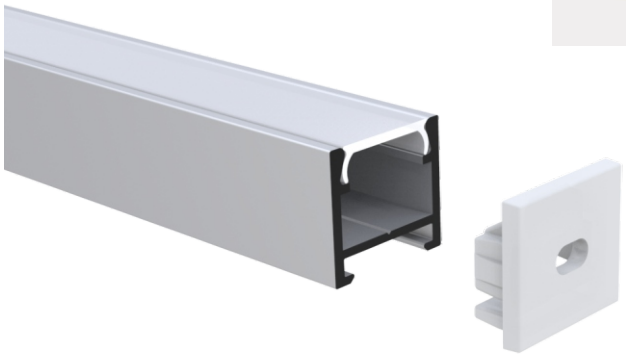

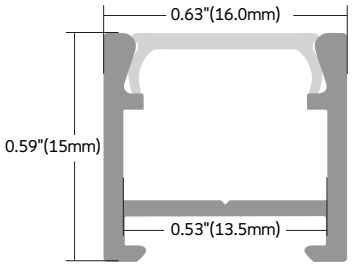

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

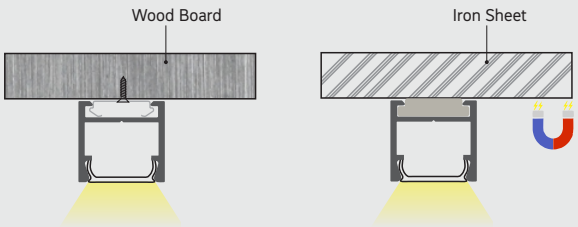

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:









Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/
opal matte /black



PMMA

clear/semi-clear/
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

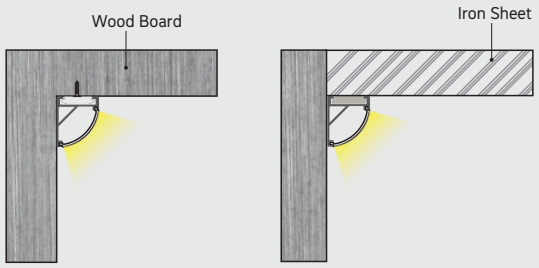

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused/clear



PMMA

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet



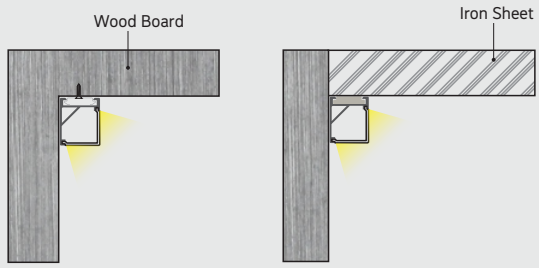

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







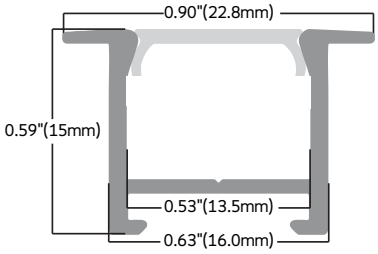

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

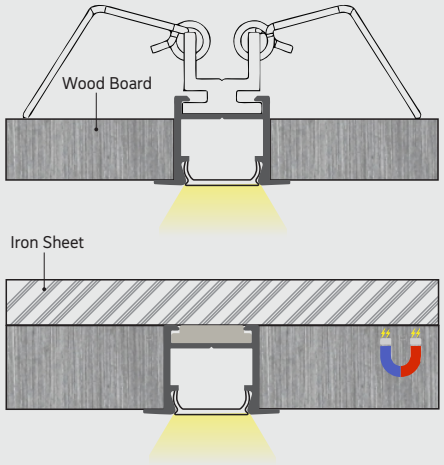

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





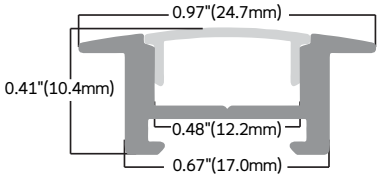

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

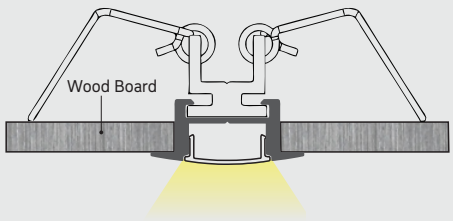

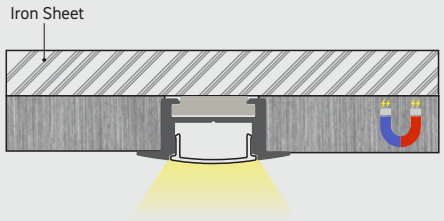

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



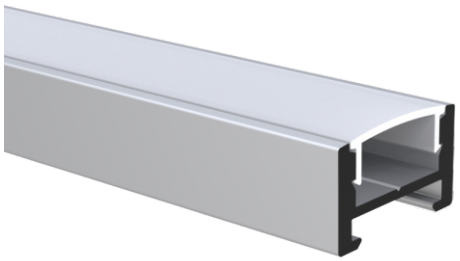



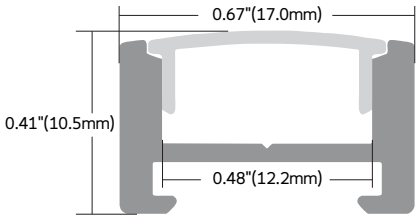

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

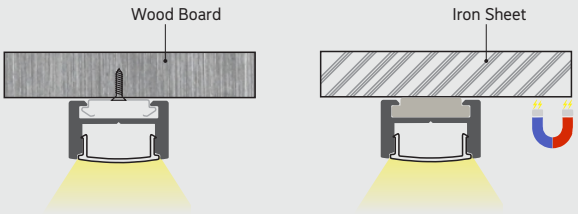

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



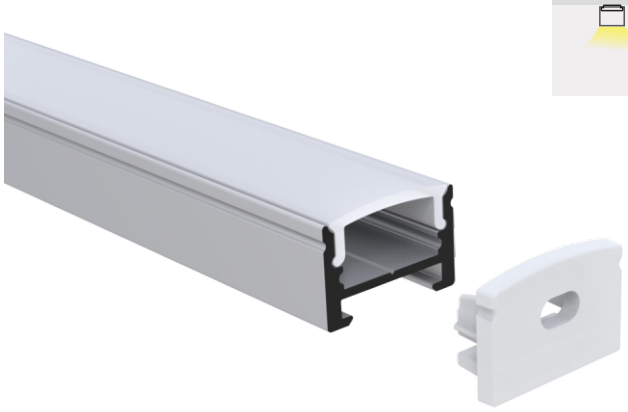

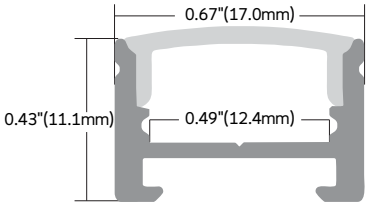

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
opal matte /black



PMMA

clear/semi-clear/
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

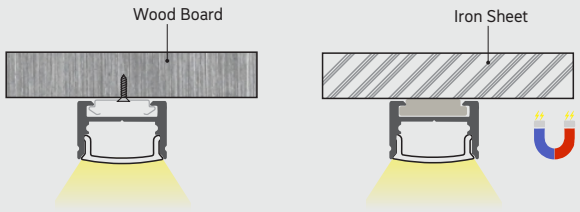

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:









Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



PMMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Magnetic Installation
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

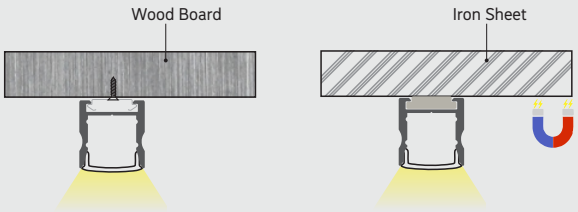

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





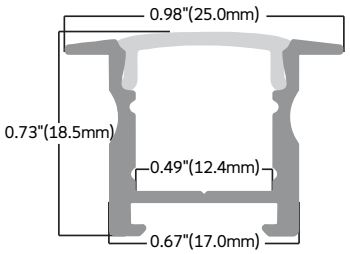

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



PMMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Mounting clip



Magnet





90° vertical connector



180° joining connector



135° Vearical connector



90° horizontal connector



135° joining connector

Structure Image

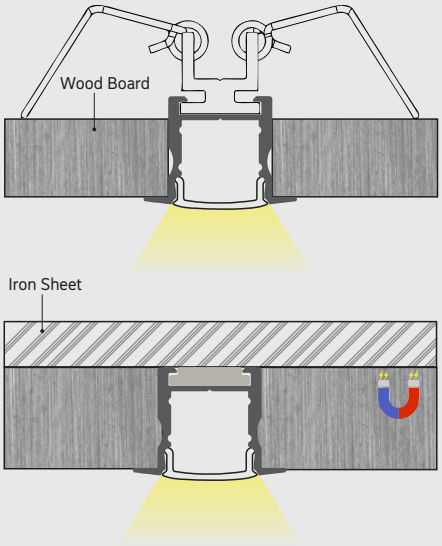

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Waterproof Series

Application



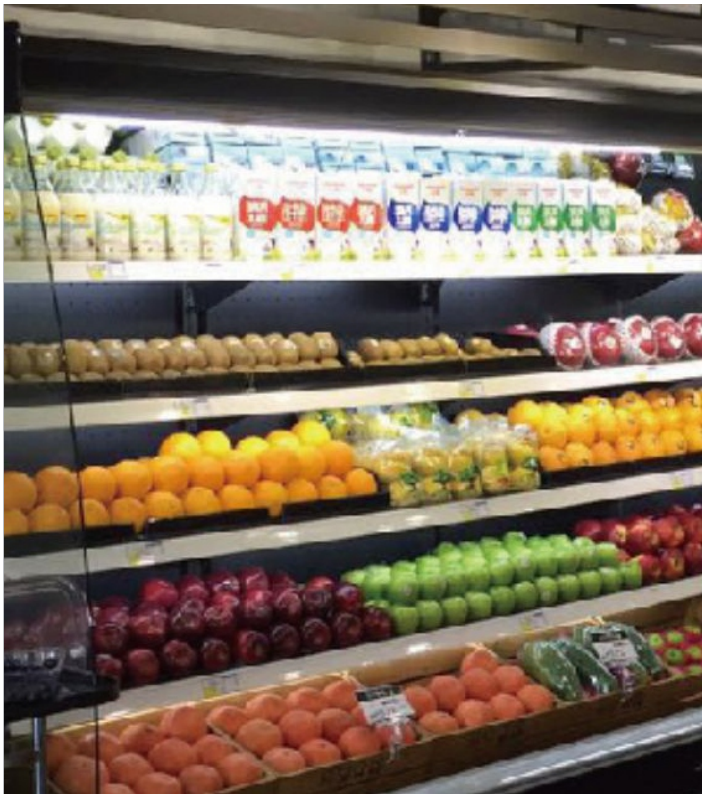







Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC Cover

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Silicone end cap



Mounting clip



Structure Image

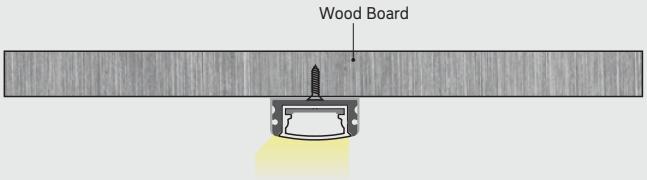

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



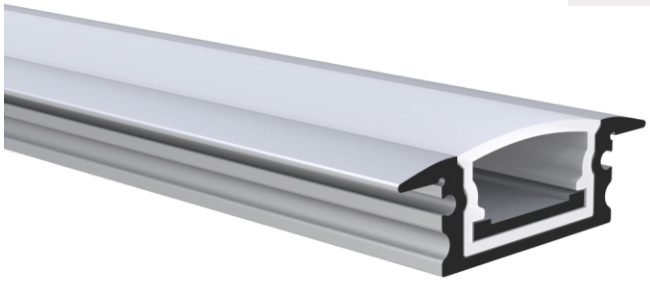

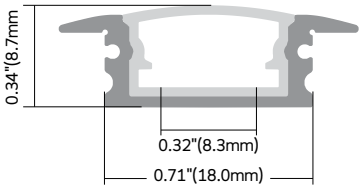

Profile color

- Black
- Silver
- White

Profile Components



PC Cover

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Silicone end cap



Mounting clip



Structure Image

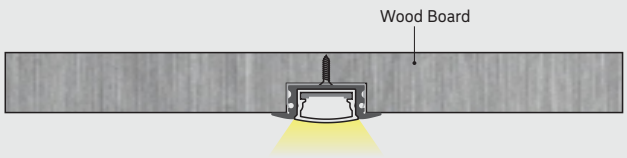

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



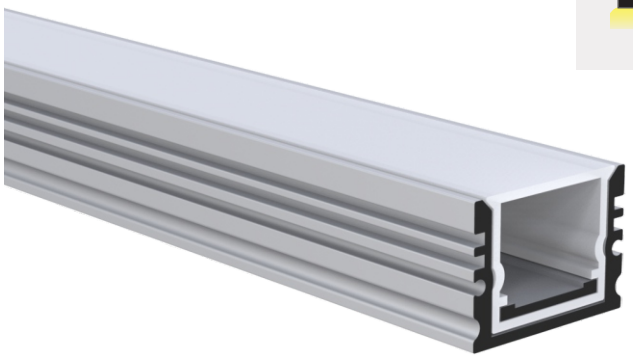



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Silicone end cap



Mounting clip



Structure Image

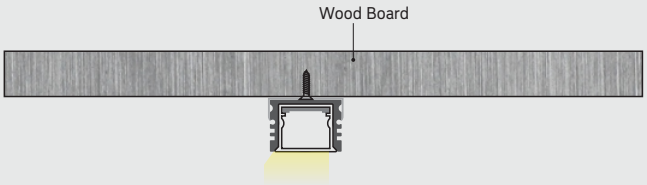

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:

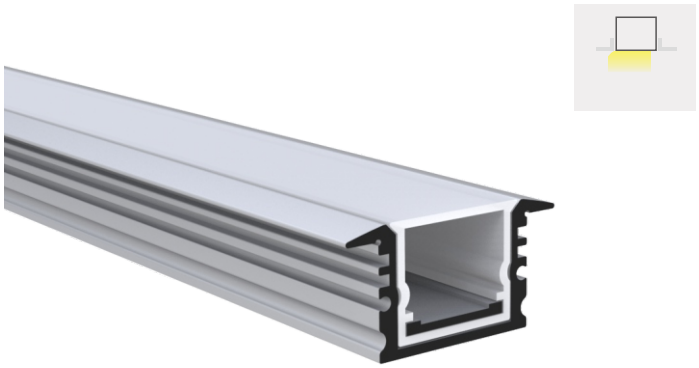



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Silicone end cap



Mounting clip



Structure Image

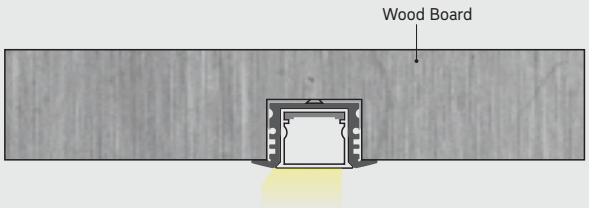

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



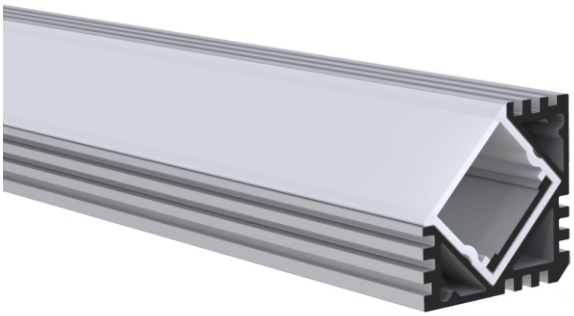



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Silicone end cap



Mounting clip



Structure Image

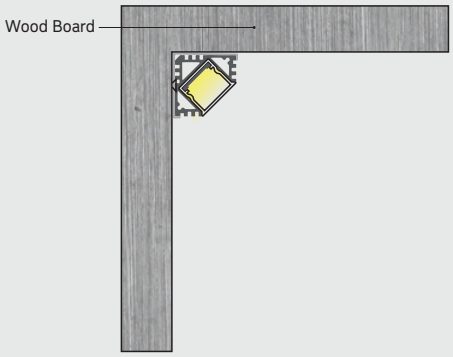

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Cabinet Series

Application













Types of Installation:





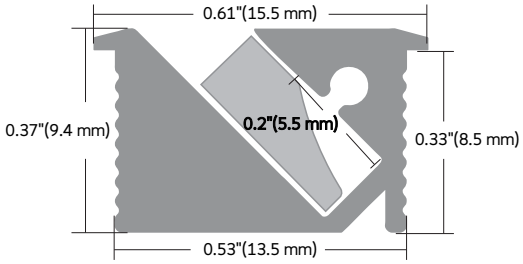

Profile color

Black

Silver

White

Profile Components

Silicone Cover

Installation Accessories

End cap × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

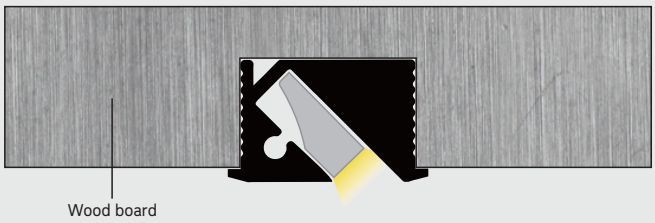

Effect Image



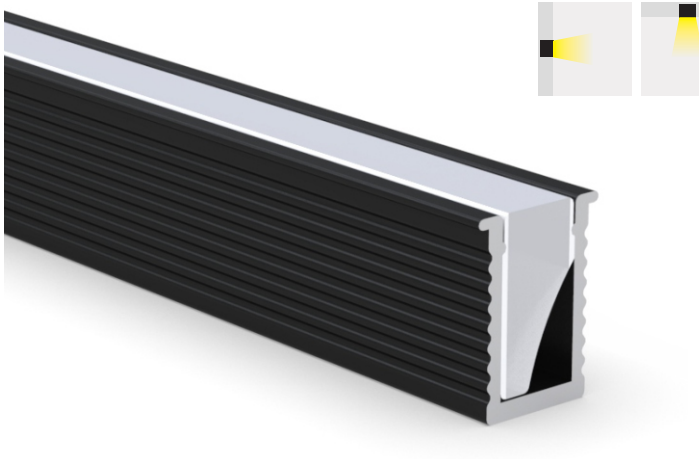

Types of Installation:

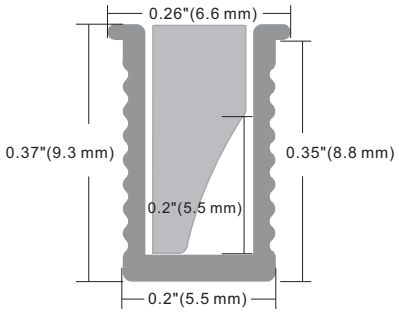

Profile color

Black

Silver

White

Profile Components

Silicone Cover

Installation Accessories

End cap × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

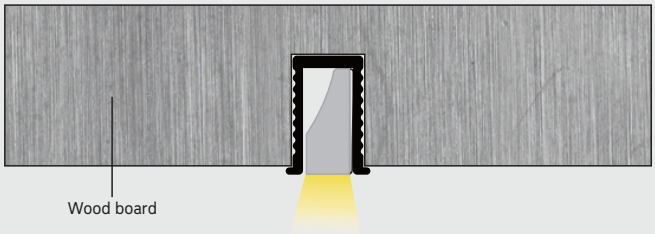

Effect Image



Types of Installation:



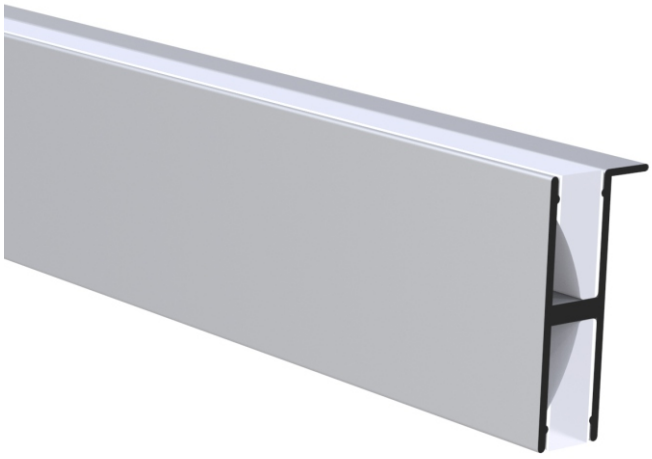

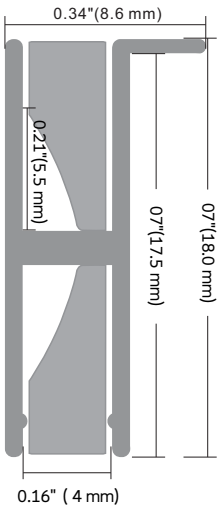

Profile color

- Black
- Silver
- White

Profile Components

Silicone Cover

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

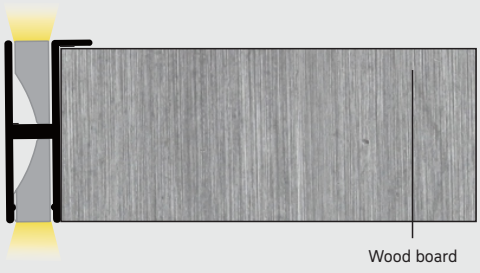

Types of Installation:

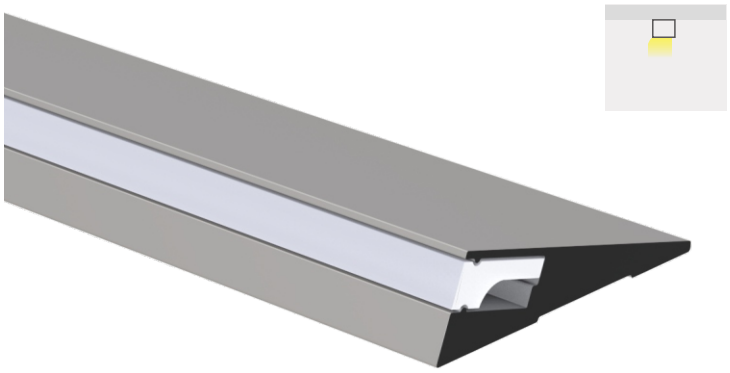

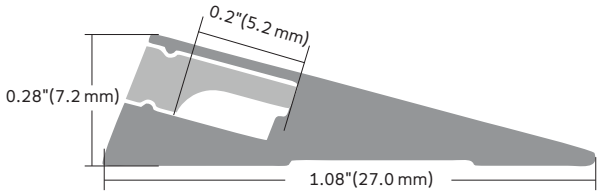

Profile color

- Black
- Silver
- White

Profile Components



Silicone Cover

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Structure Image

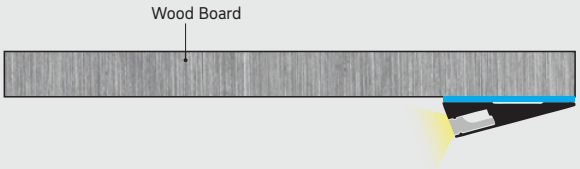

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components

Silicone Cover

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

Structure Image

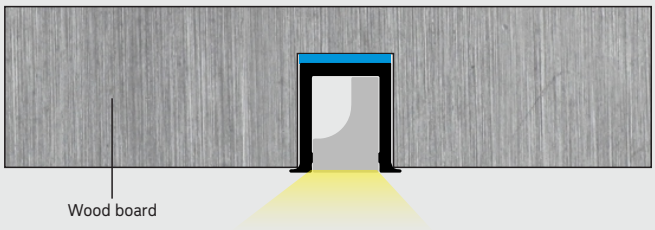

Types of Installatlon:

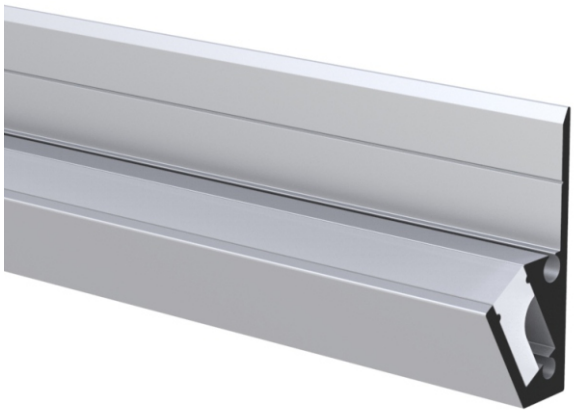



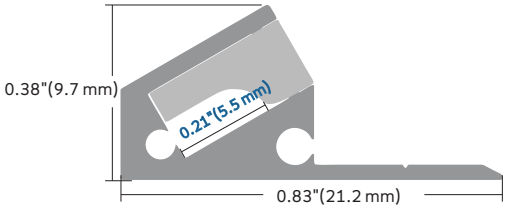

Profile color

- Black
- Silver
- White

Profile Components

Silicone Cover

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

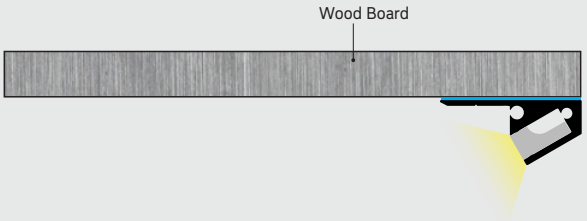

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

Types of Installatlon:

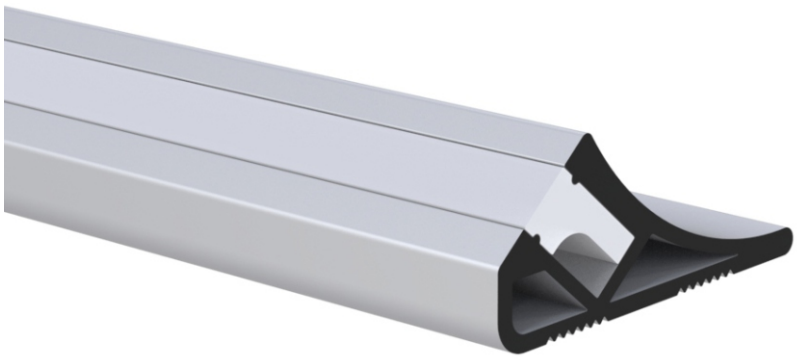

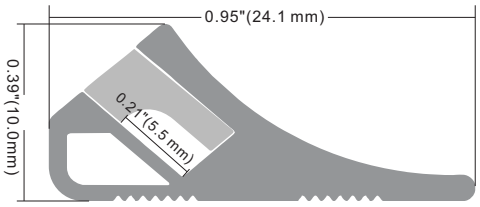

Profile color

- Black
- Silver
- White

Profile Components



Silicone Cover

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Structure Image

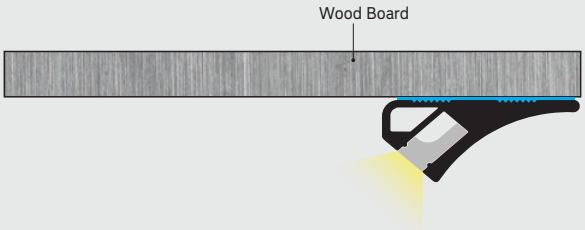

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-4MM	120LEDs	12V/24V	8W/m	677LM/m

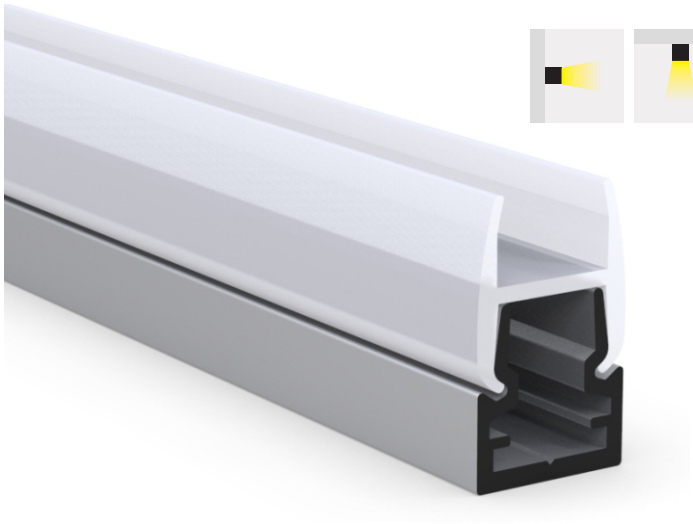

Types of Installation:



Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Installation Accessories

End cap × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

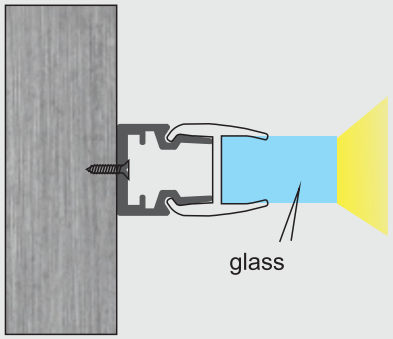

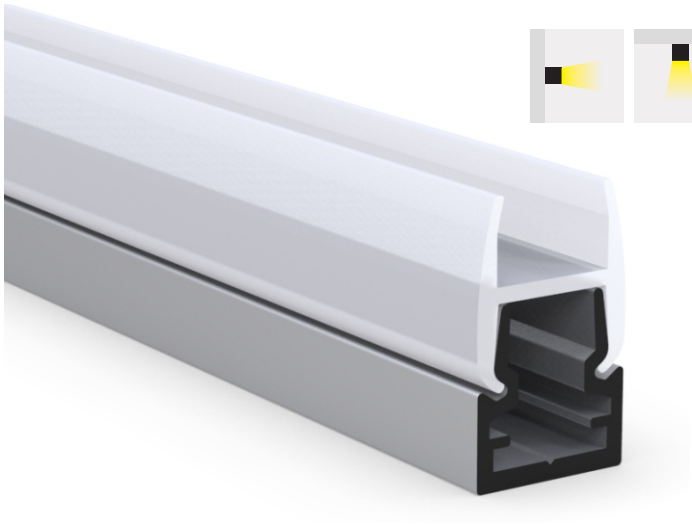

Types of Installation:



Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Structure Image

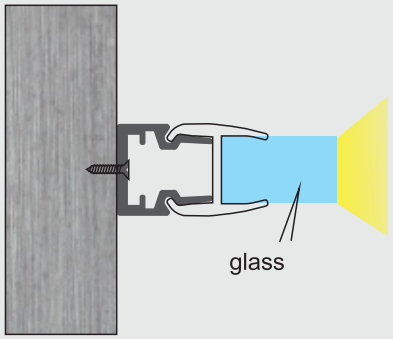

Types of Installation:



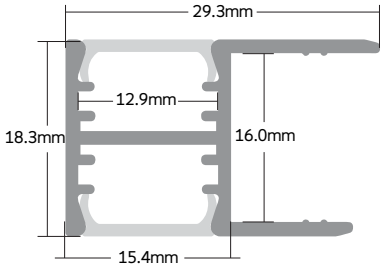

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

Mounting clip



Structure Image

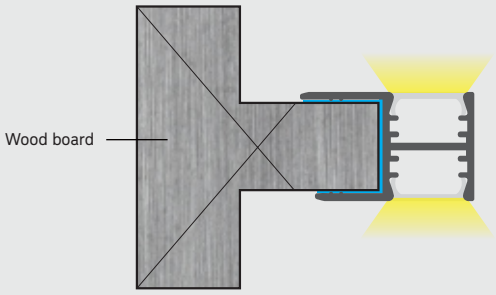

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



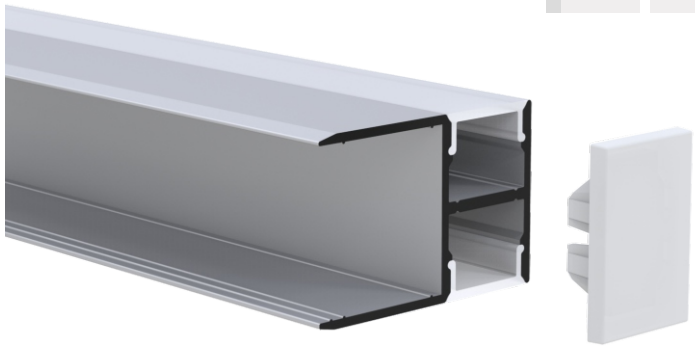

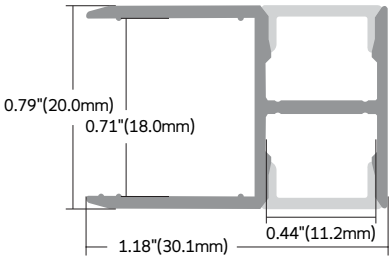

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
Prismatic Frosted

PMMA

opal matte

Installation Accessories

End cap × 2



End cap with hole × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image



Types of Installation:



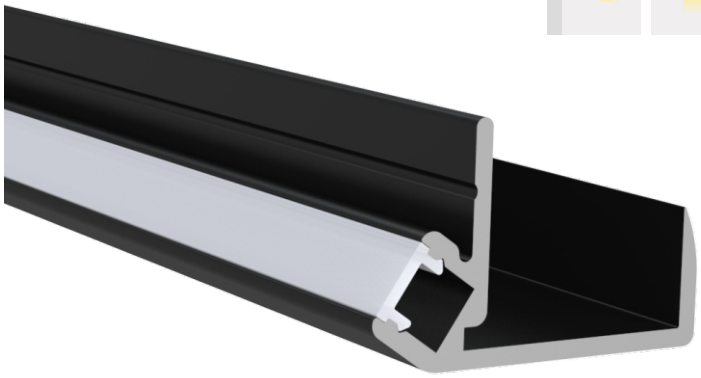

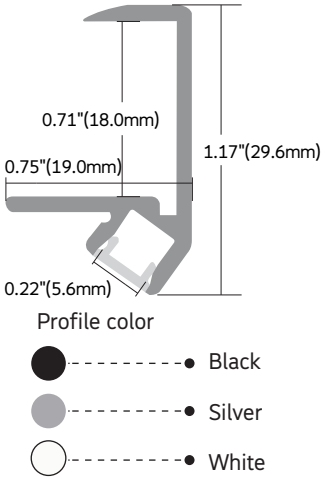

Profile Components



PC

diffused/black

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Structure Image

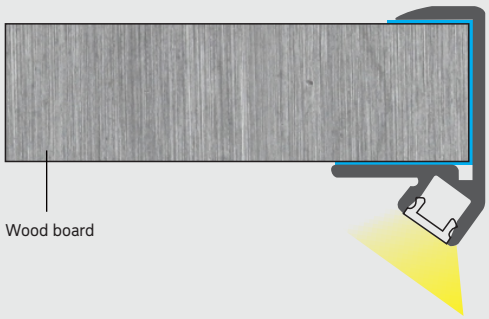

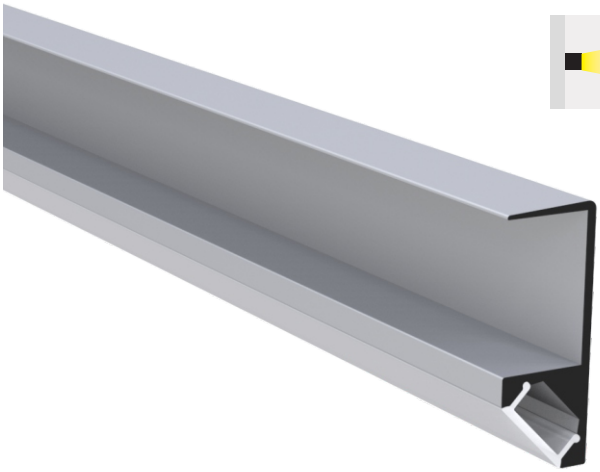

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
Prismatic Frosted

PMMA

opal matte

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-5MM	120LEDs	12V/24V	9.6W/m	850LM/m
BW2835-160-5MM	160LEDs	24V	14.4W/m	2160LM/m

Structure Image

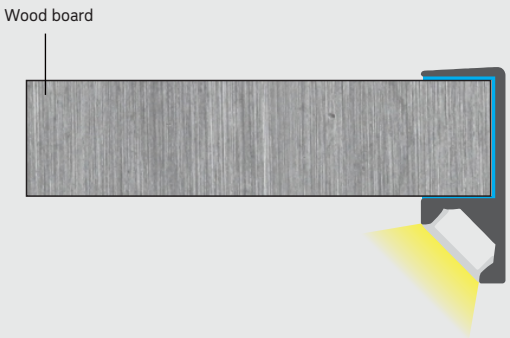

Types of Installation:



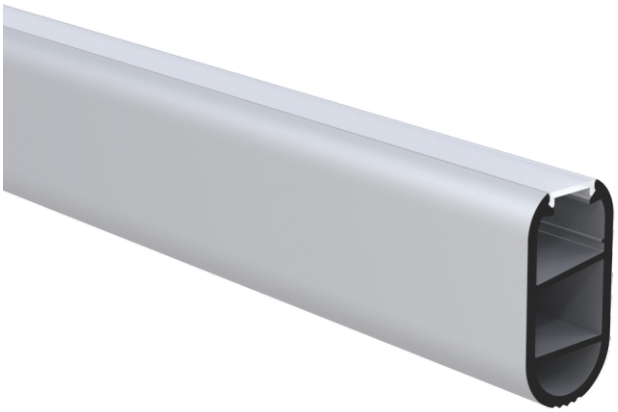



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
black/Prismatic Frosted



PMMA

diffused/
opal matte

Installation Accessories

Mounting clip





Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

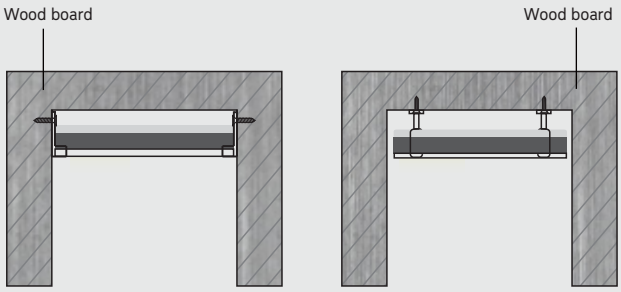

Effect Image



Floor Series

Application



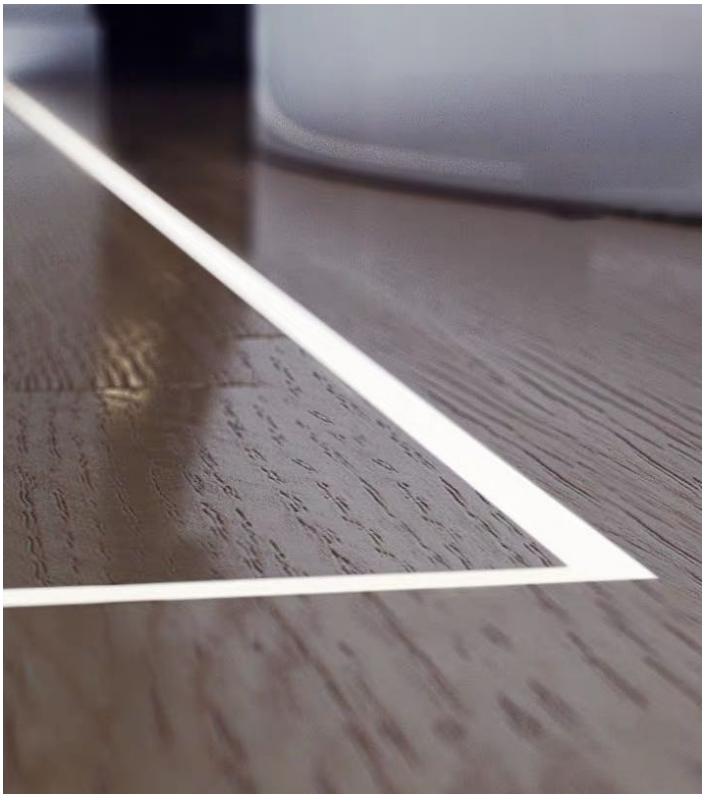







Types of Installation:



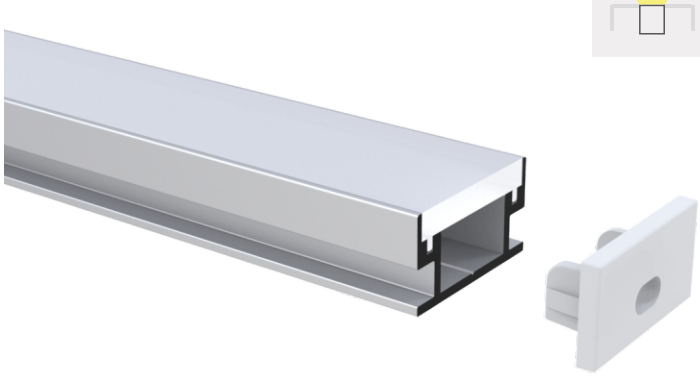



Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2

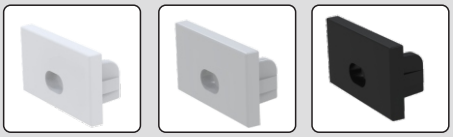

Structure Image

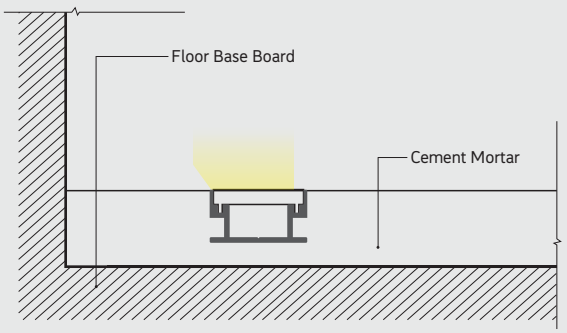

Effect Image

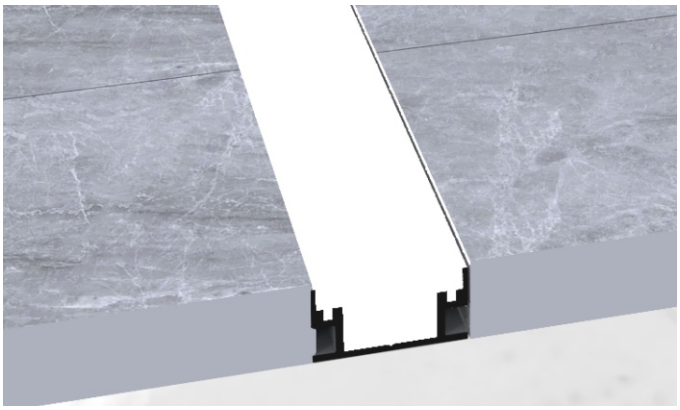

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



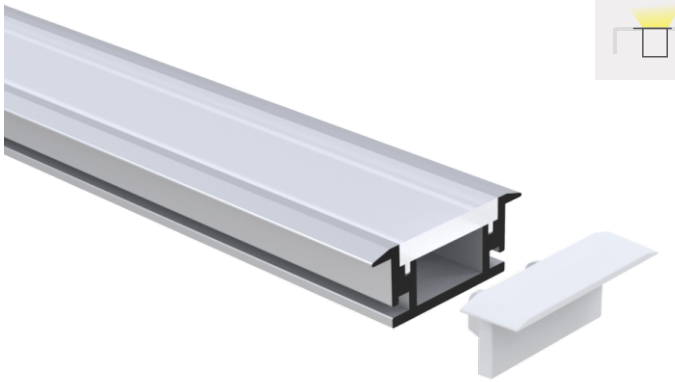

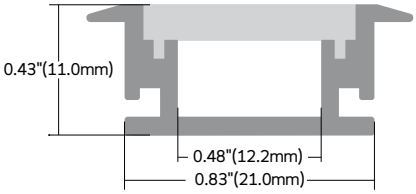

Profile color

- Black
- Silver
- White

Profile Components



PC

clear/diffused/
opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

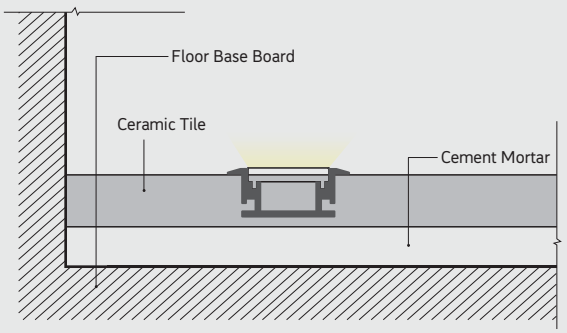

Effect Image

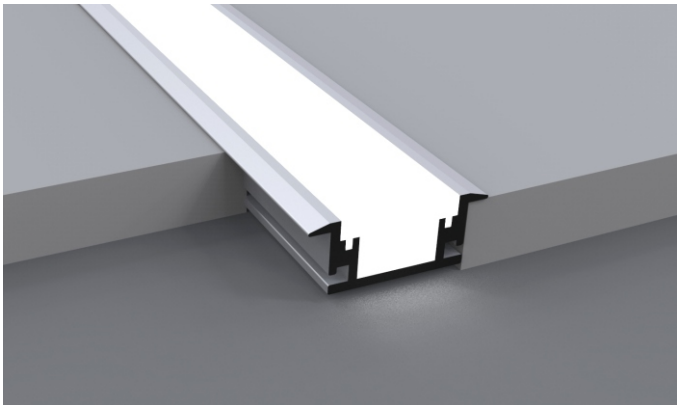

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



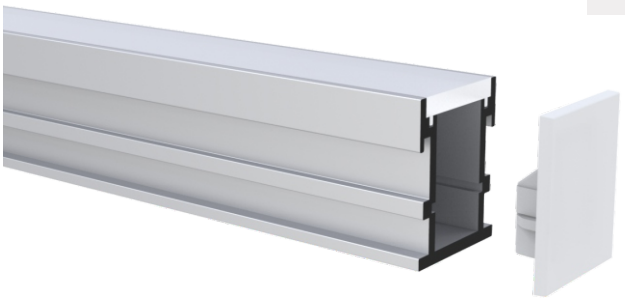



Profile color

Black

Silver

White

Profile Components



PC

clear/diffused/
opal matte /black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

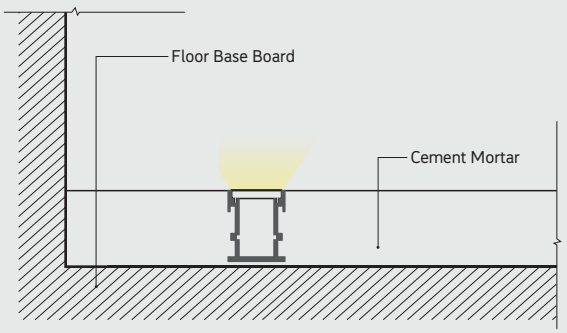

Effect Image

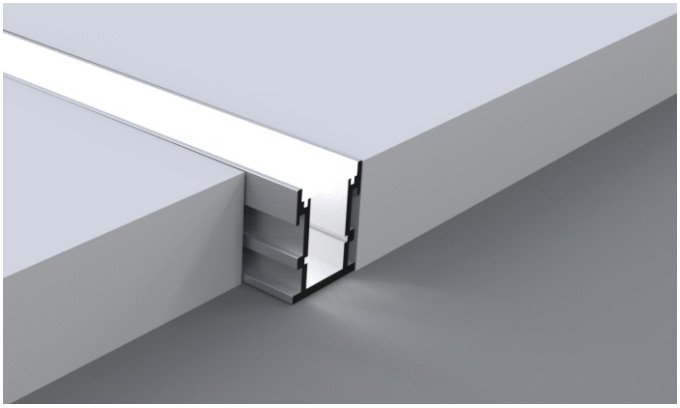

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



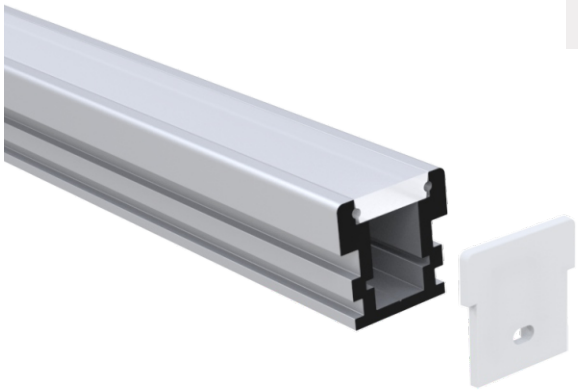



Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

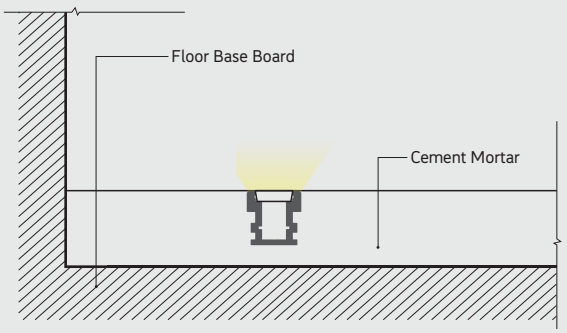

Effect Image

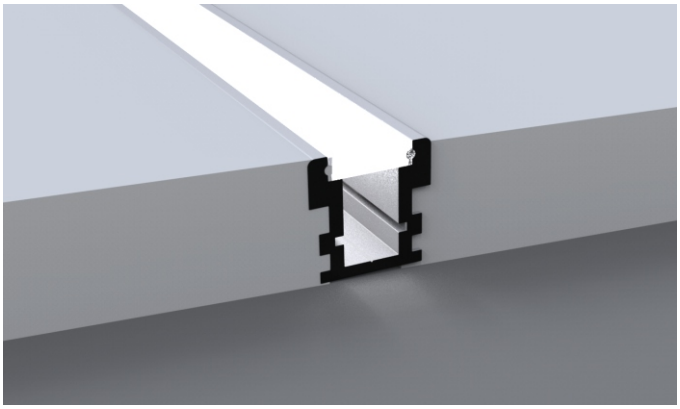

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

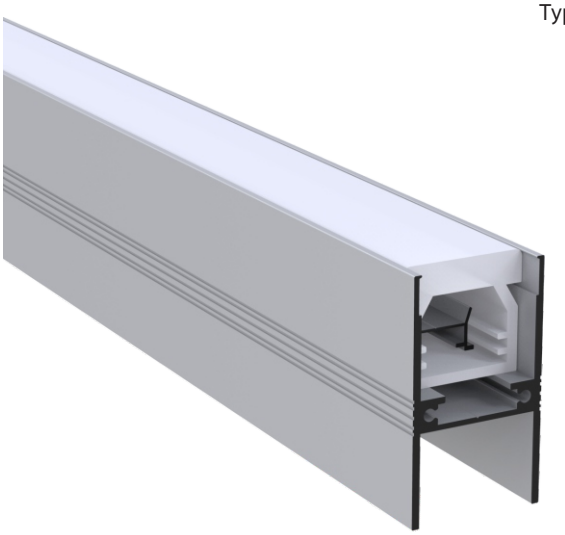

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Silicone end cap



Structure Image

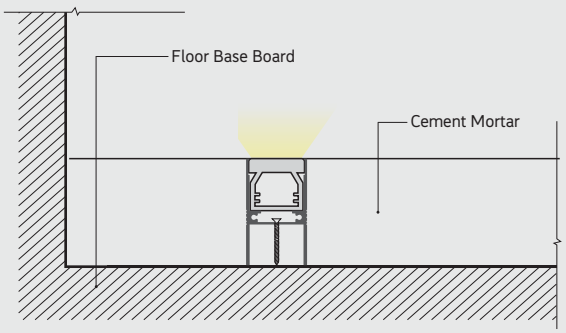

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

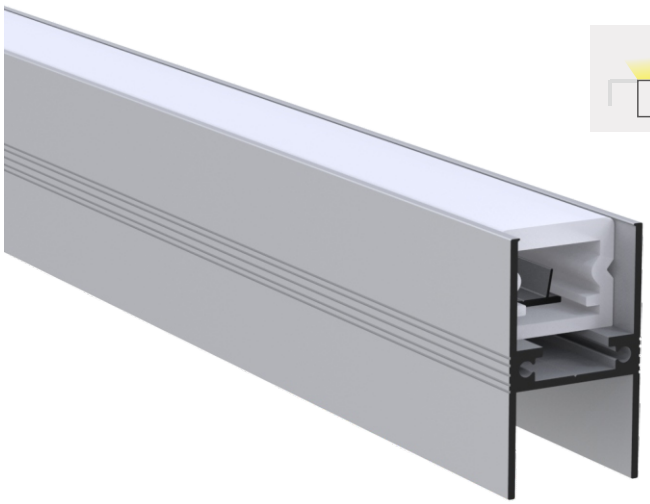

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Silicone end cap



Structure Image

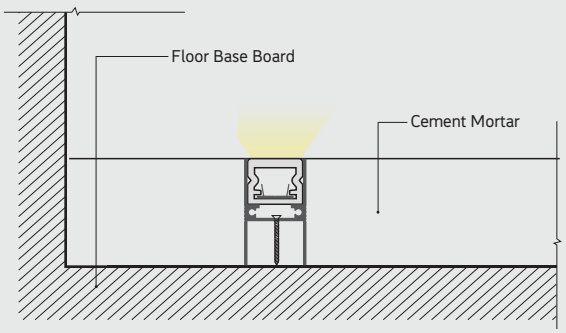

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

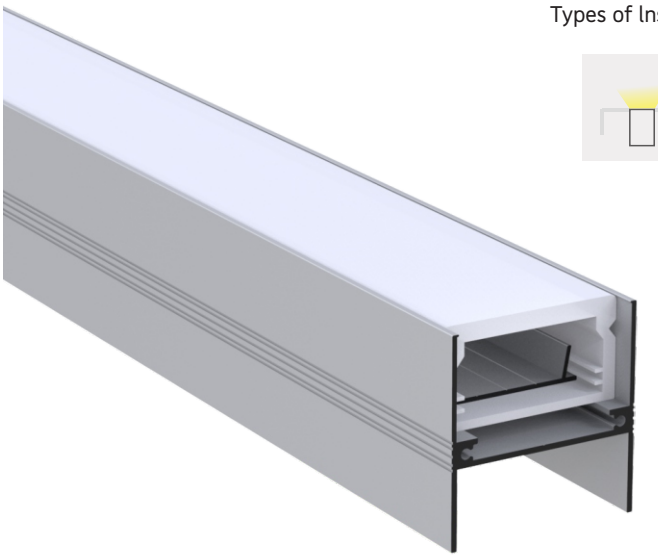

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Silicone end cap



Structure Image

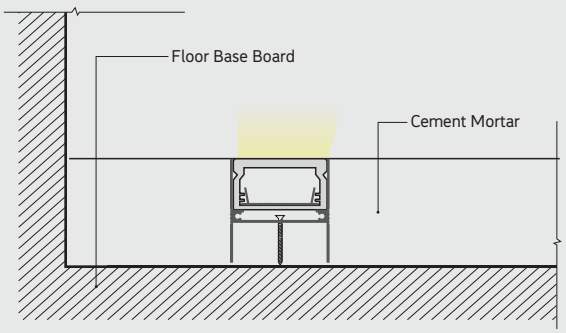

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

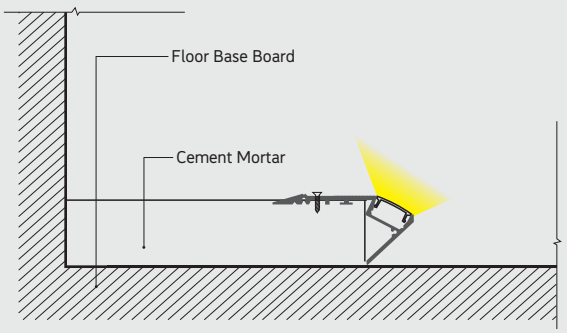

Types of Installation:





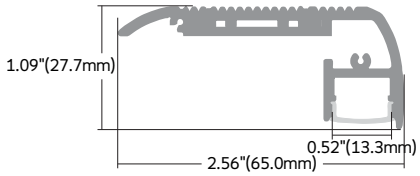

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
clear/black/Prismatic Frosted



MMA

P

opal matte /
diffused/clear/black

Installation Accessories

End cap × 2



End cap with
hole × 2



Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

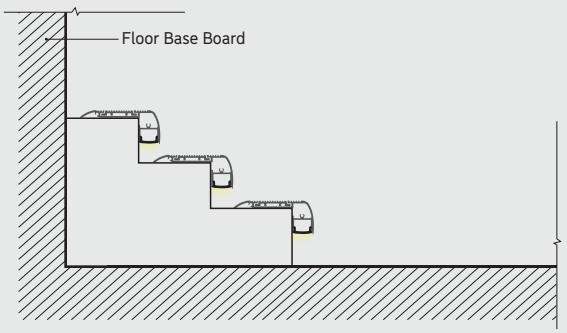

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

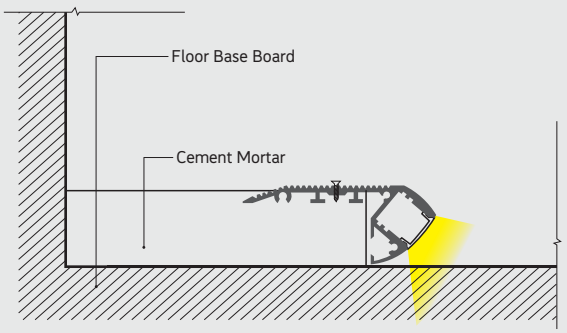

Types of Installation:



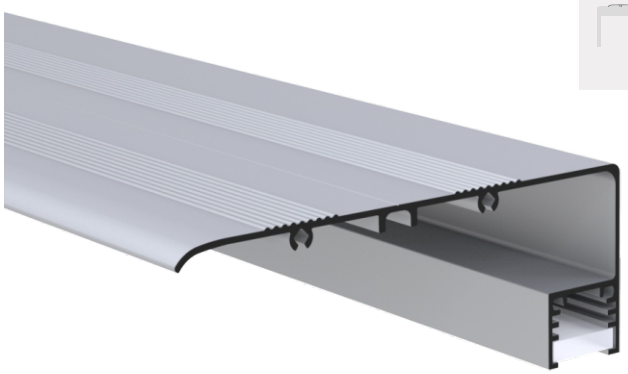

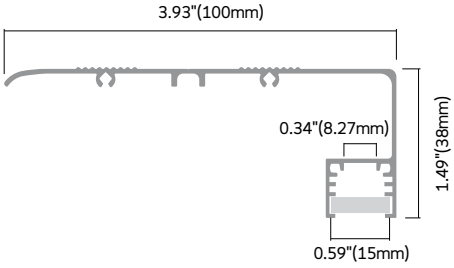

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Floor
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Structure Image

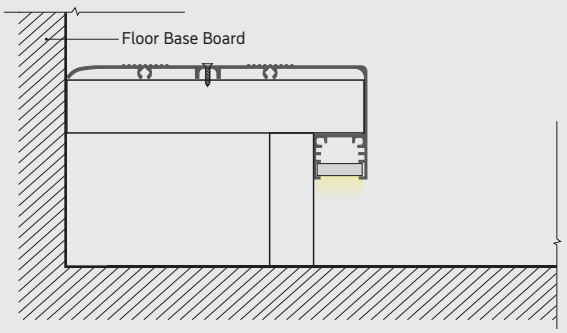

Outside Corner and Inside corner

Application



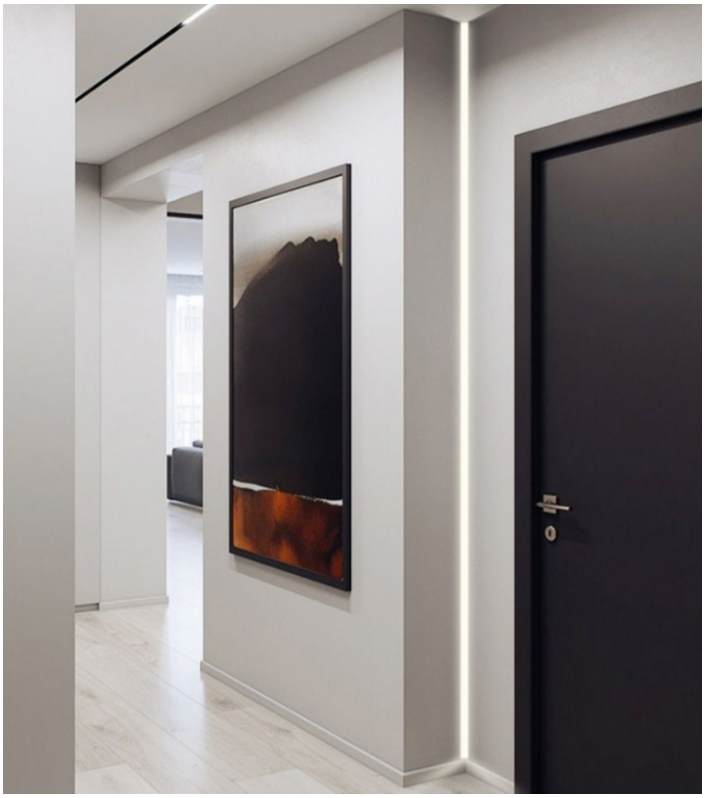







L198

Outside Corner and Inside corner

Types of Installation:



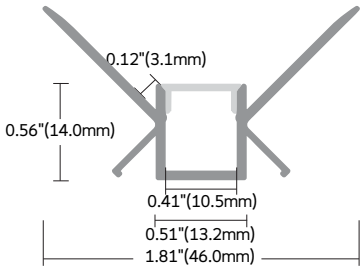

Profile color

- Black
- Silver
- White

Profile Components



PC
opal matte /diffused/
Prismatic Frosted

MMA
P
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

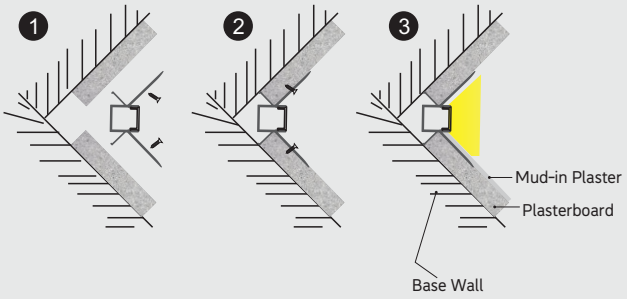

Effect Image

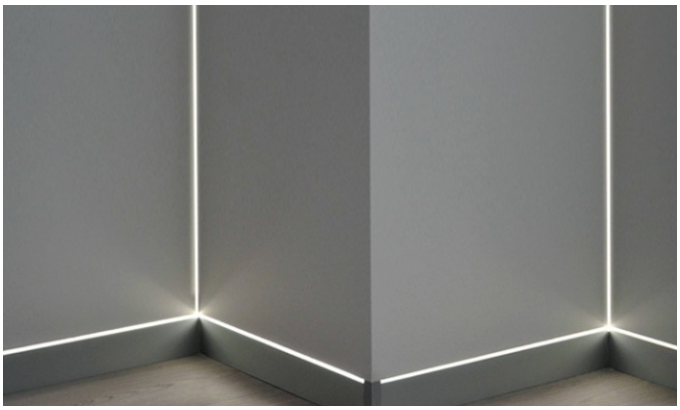

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

L199

Outside Corner and Inside corner

Types of Installation:

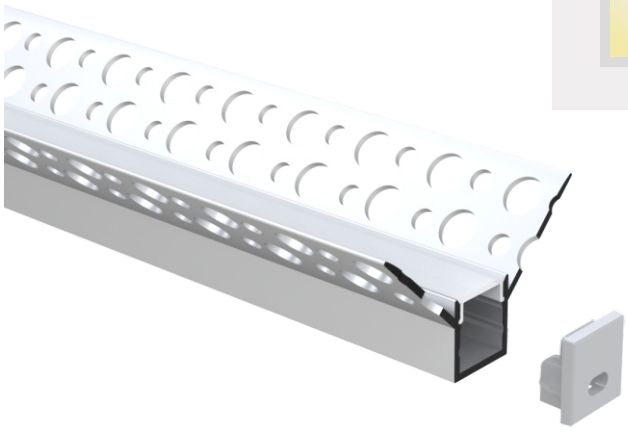

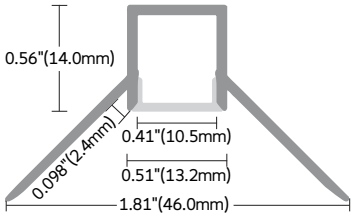

Profile color

- Black
- Silver
- White

Profile Components



PC
opal matte /diffused/
Prismatic Frosted

MMA
P
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

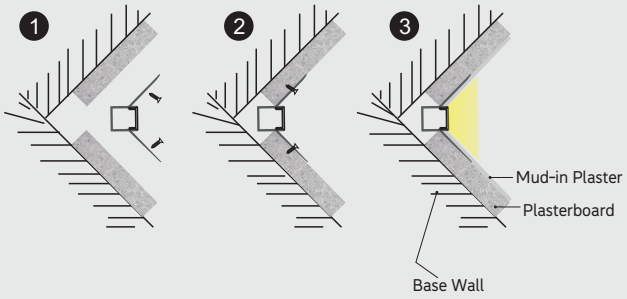

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

L201

Outside Corner and Inside corner

Types of Installation:

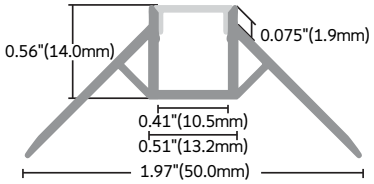

Profile color

- Black
- Silver
- White

Profile Components



PC
opal matte /diffused/
Prismatic Frosted

MMA
P
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

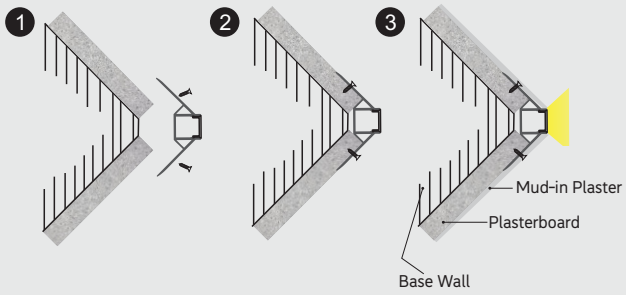

Effect Image

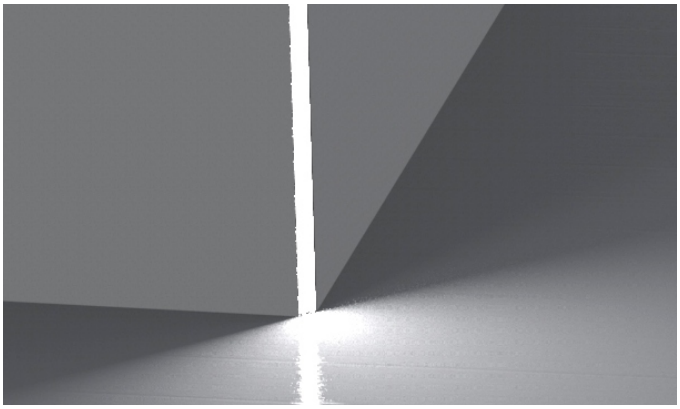

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

L304

Outside Corner and Inside corner

Types of Installation:

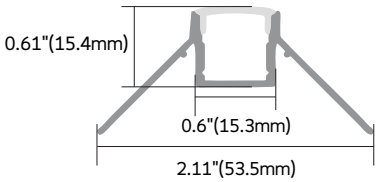

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

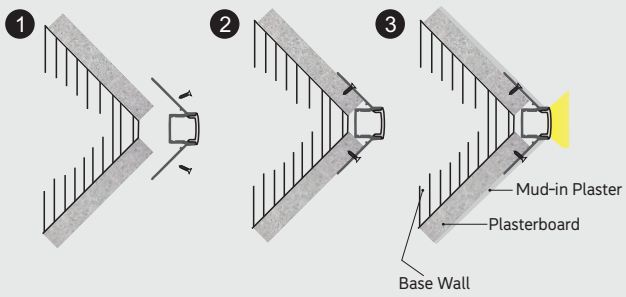

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

L658

Outside Corner and Inside corner

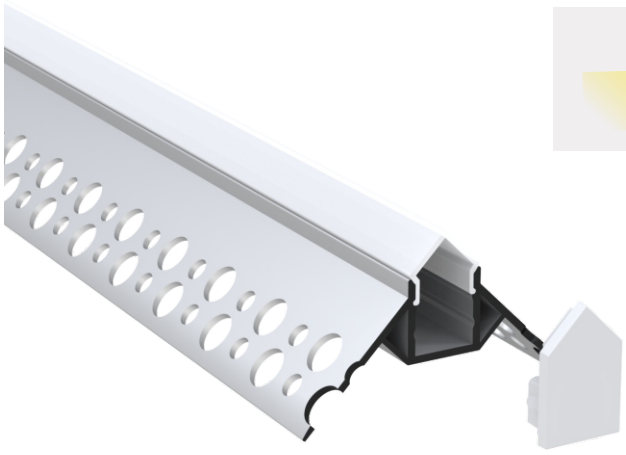

Types of Installation:

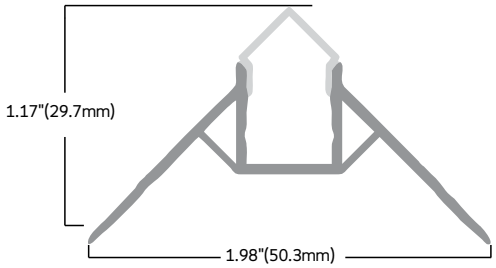

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

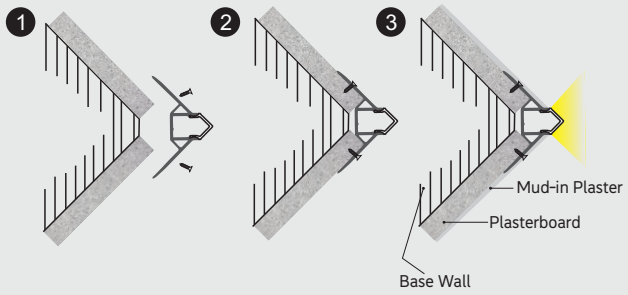

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

Effect Image

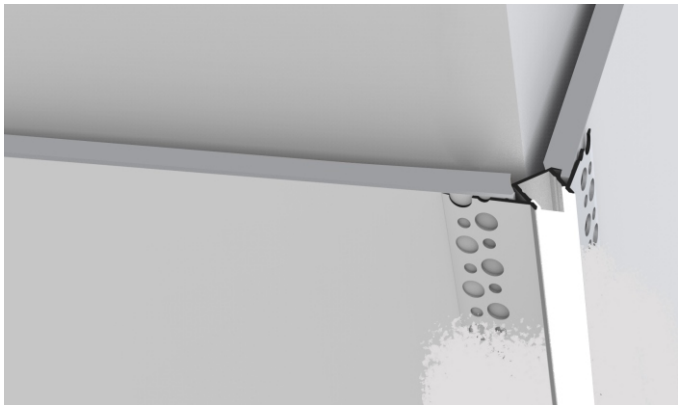

L519

Outside Corner and Inside corner

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

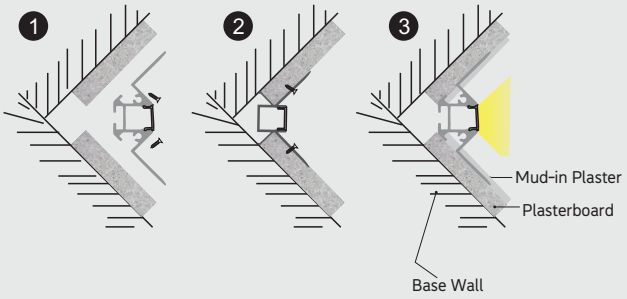

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

L529

Outside Corner and Inside corner

Types of Installation:

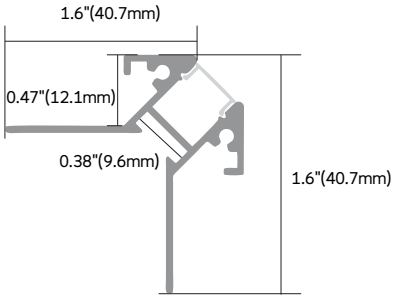

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Internal And External Corner
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	180LEDs	12V/24V	13W/m	1300LM/m

Structure Image

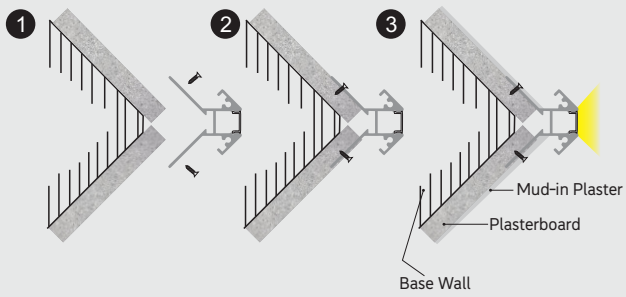

Skirting Series

Application



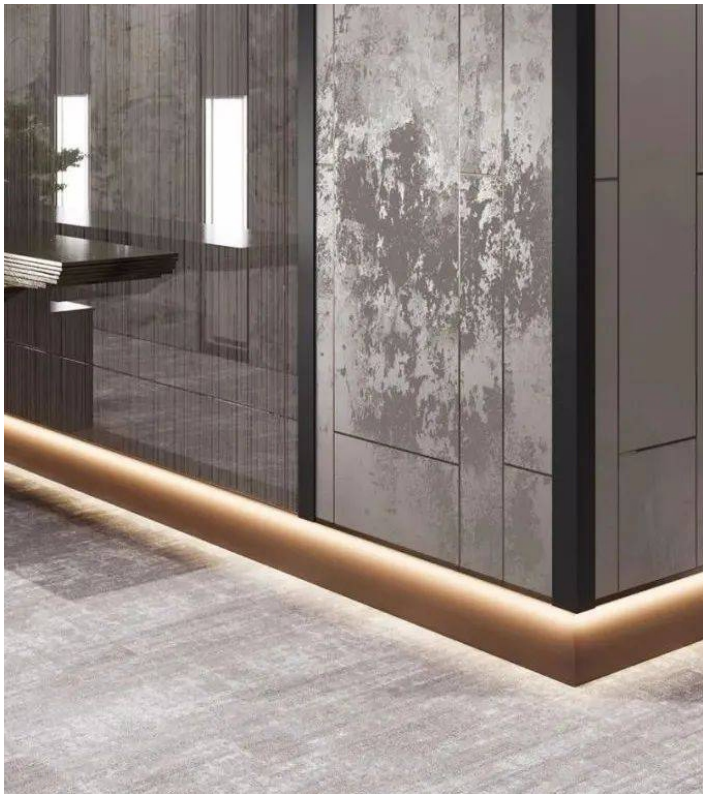





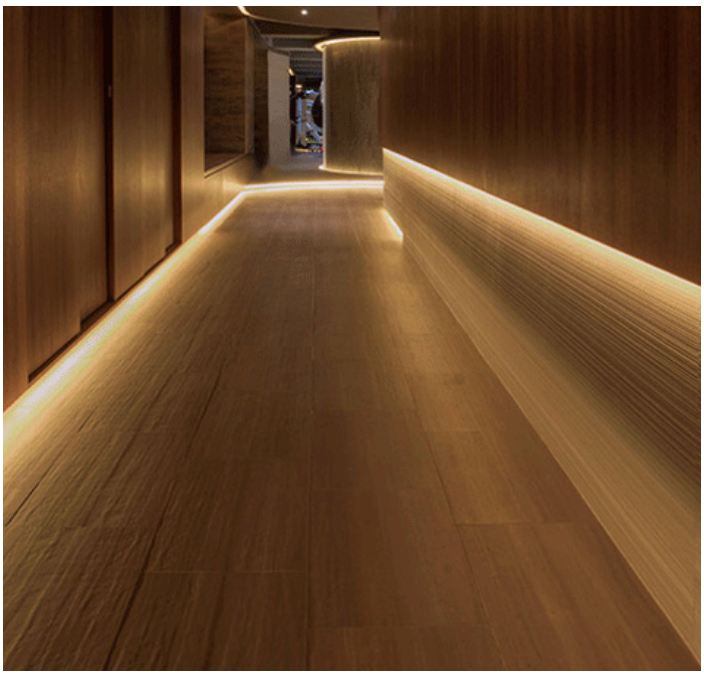

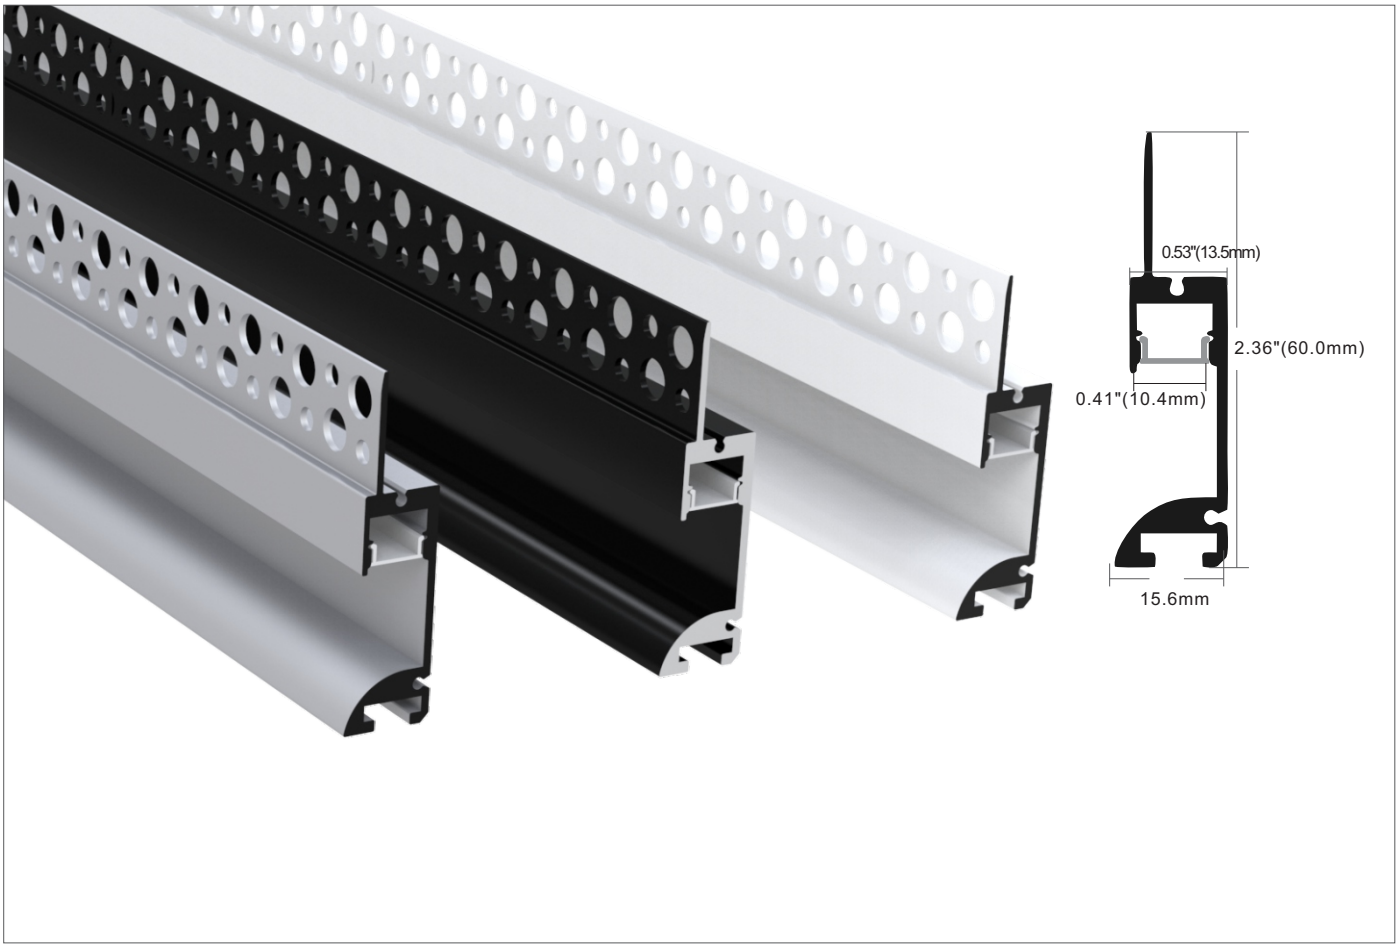

Installation

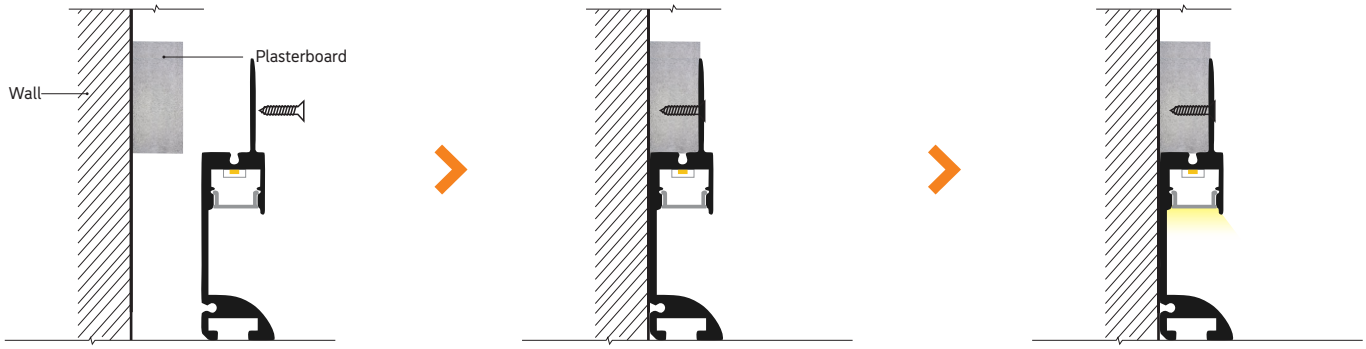

LED Strip Proposal

Strip width	LEDs/meter	Voltage	Power	Lumen
8MM	120LEDs	12V/24V	13W/m	1300LM/m
10MM	182LEDs	24V	15W/m	1800LM/m



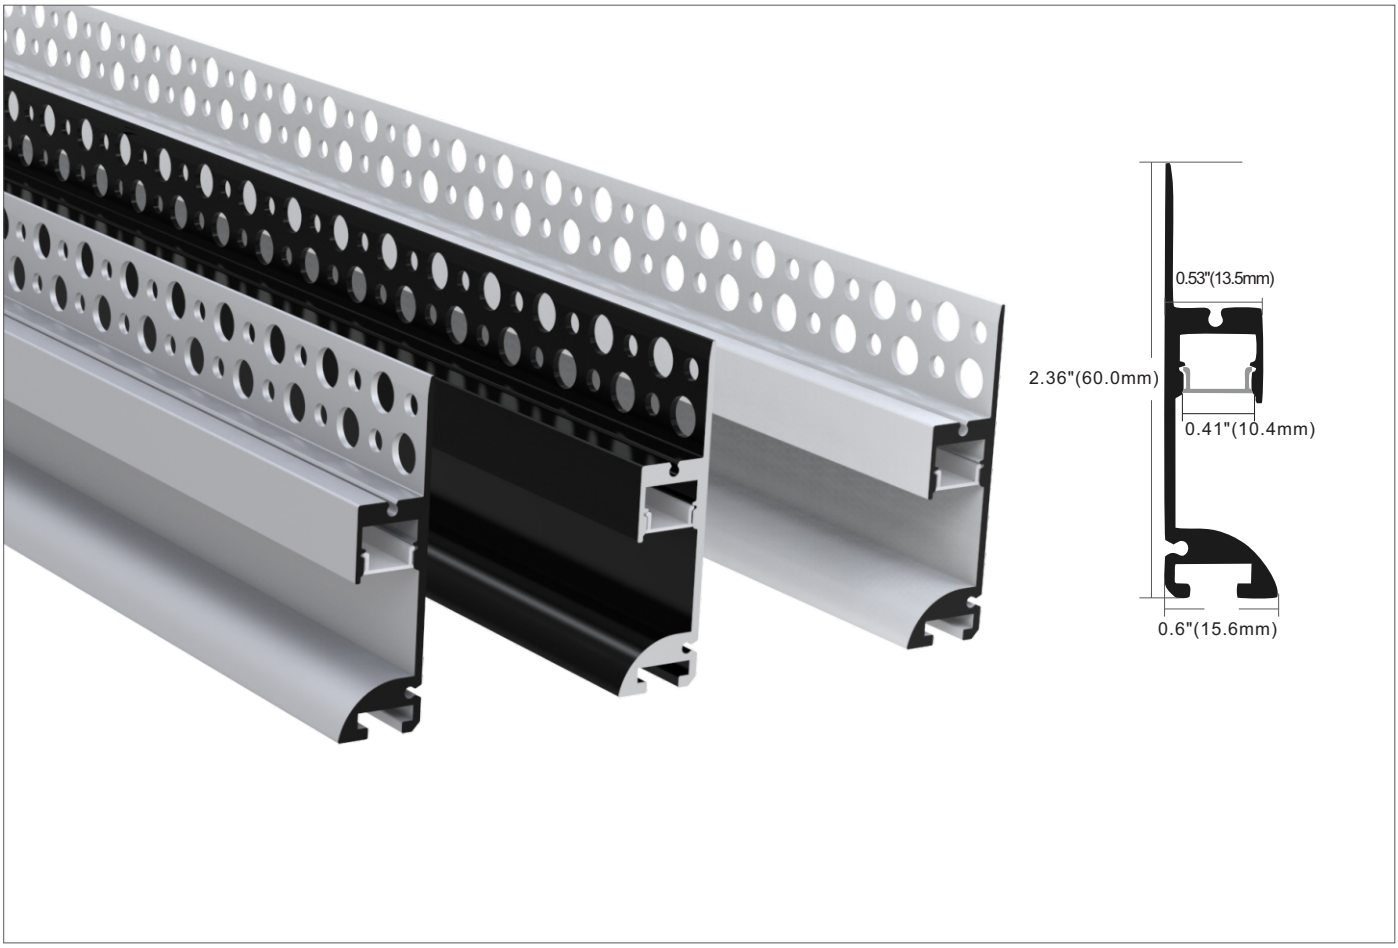

Installation

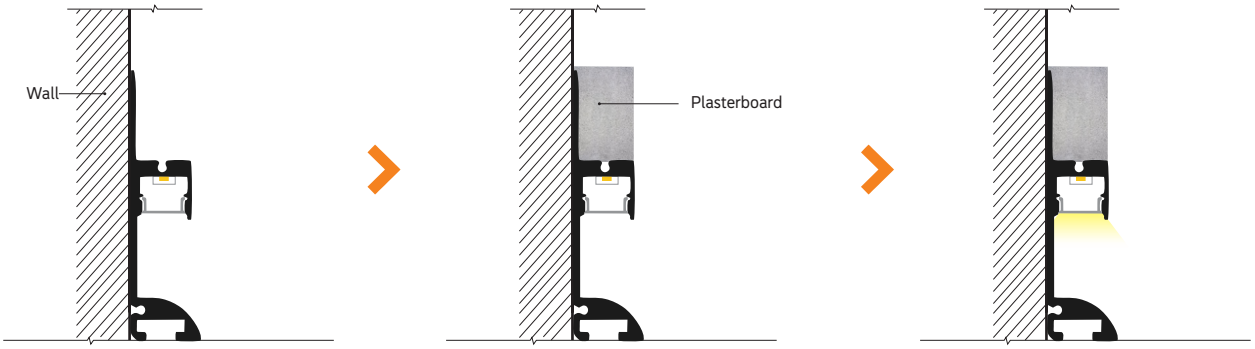

LED Strip Proposal

Strip width	LEDs/meter	Voltage	Power	Lumen
8MM	120LEDs	12V/24V	13W/m	1300LM/m
10MM	182LEDs	24V	15W/m	1800LM/m





Endcaps *2

1 with hole; 1 without hole.

Installation

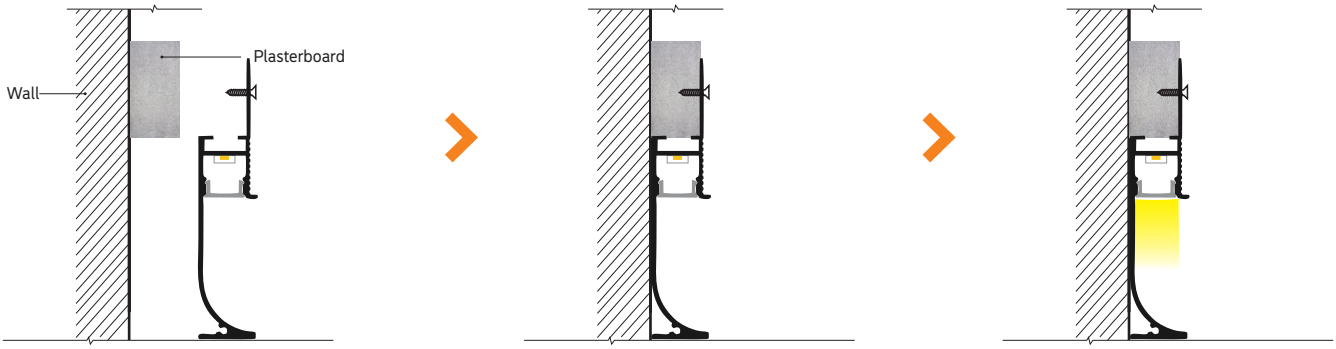

LED Strip Proposal

Strip width	LEDs/meter	Voltage	Power	Lumen
8MM	120LEDs	12V/24V	13W/m	1300LM/m
10MM	182LEDs	24V	15W/m	1800LM/m

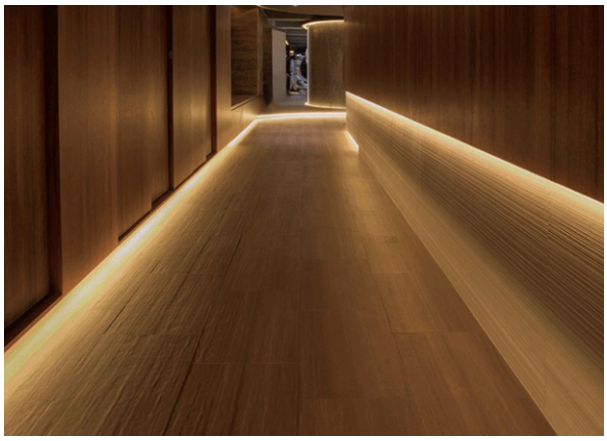

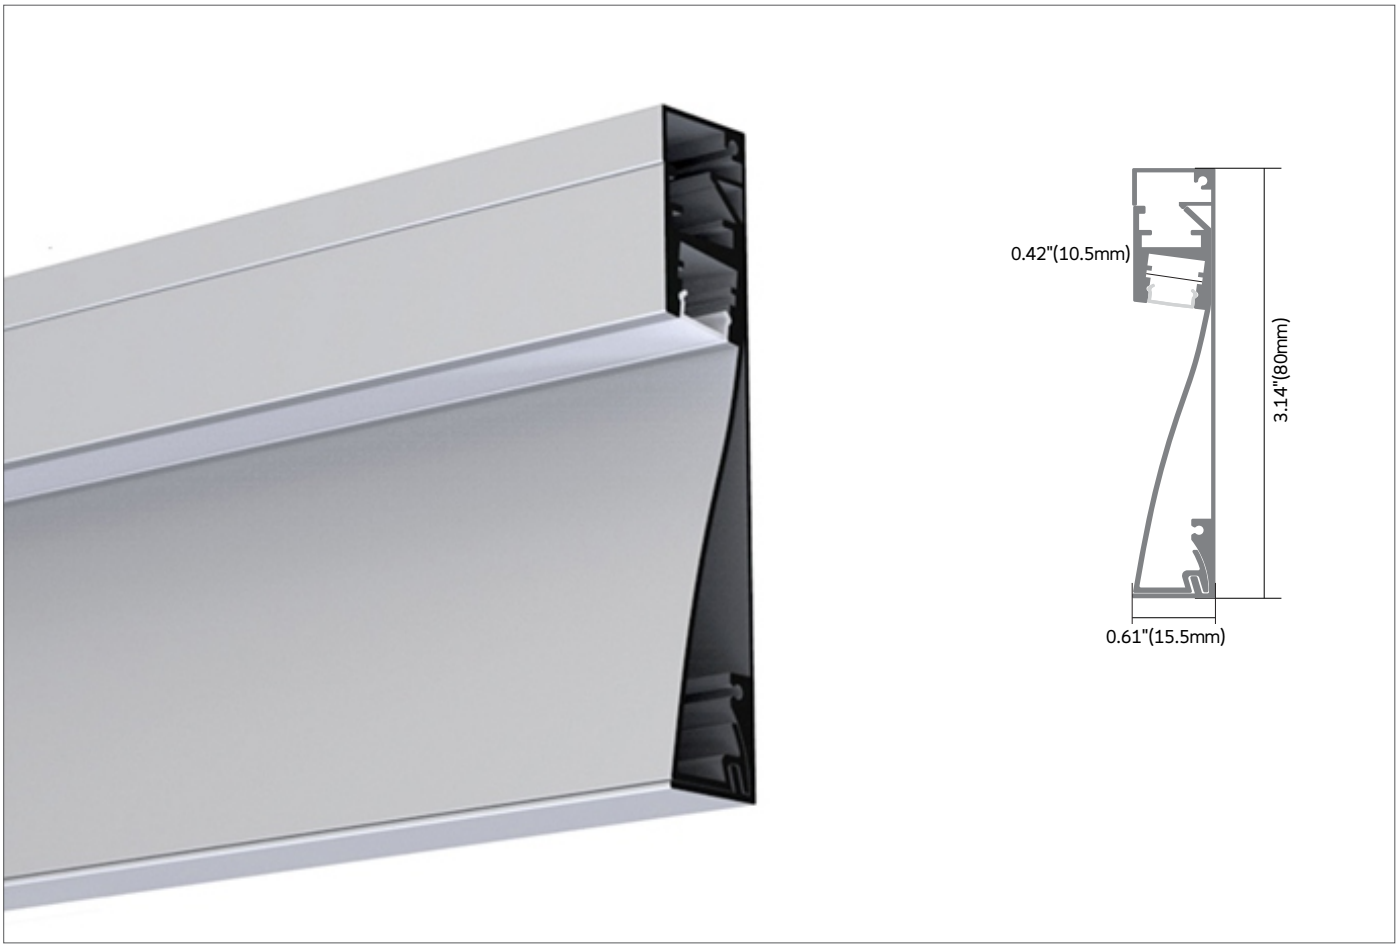

Installation

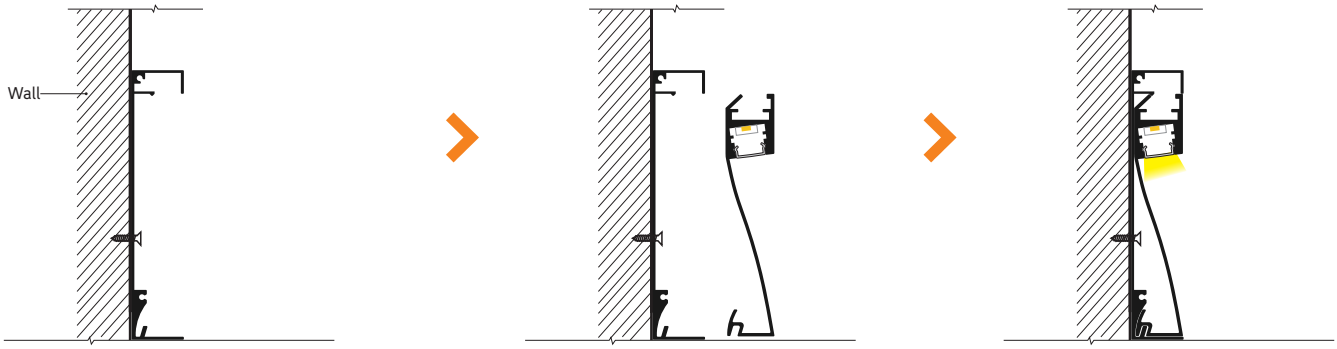

LED Strip Proposal

Strip width	LEDs/meter	Voltage	Power	Lumen
8MM	120LEDs	12V/24V	13W/m	1300LM/m
10MM	182LEDs	24V	15W/m	1800LM/m

J001A-1

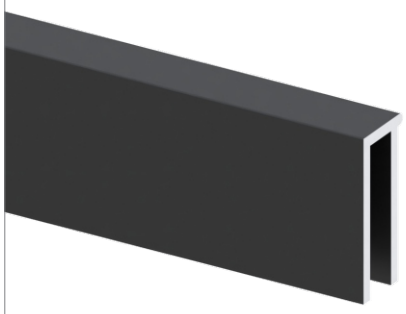





Black Iron Grey
Gold White

J002-1

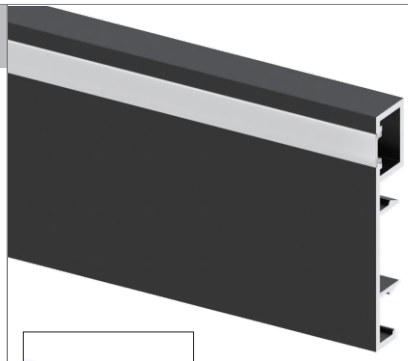





Black
Dark Gray
White

J003-1

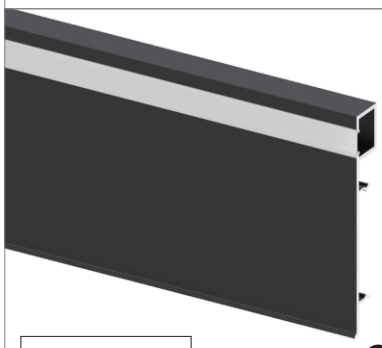



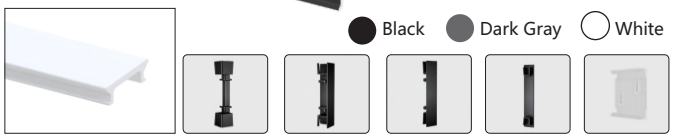

Black Dark Gray White

J004-1

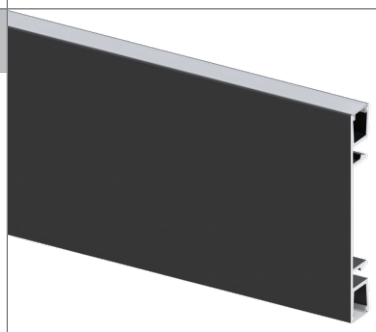





Black White

J005A-1

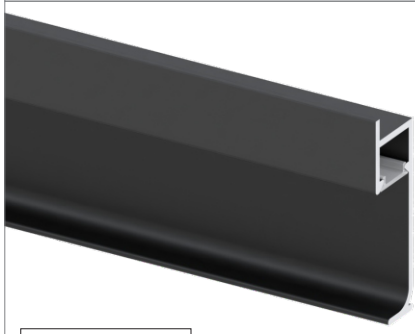



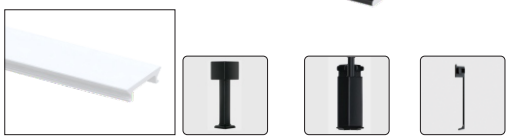

Wifakin
Champagne Gold
Rose Gold
Black
White

J006A-1







Black

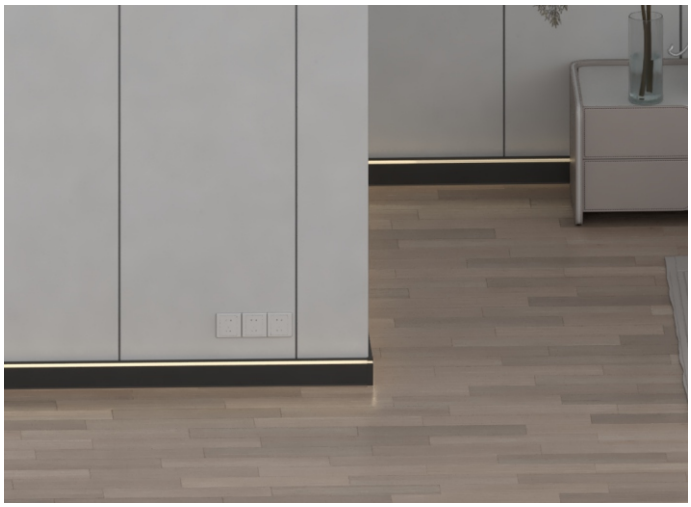



Bendable Plaster In Series

Application



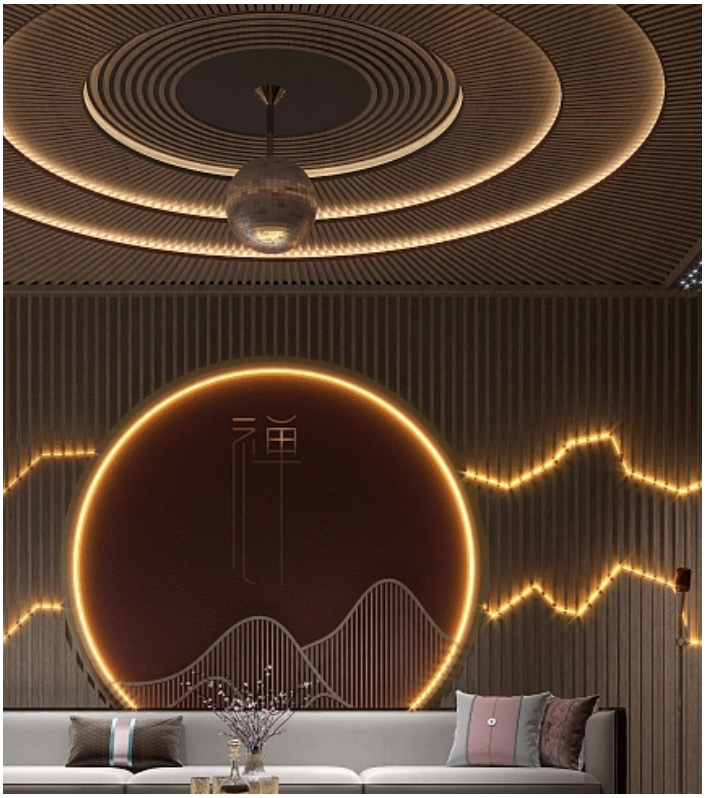







Side bending effect

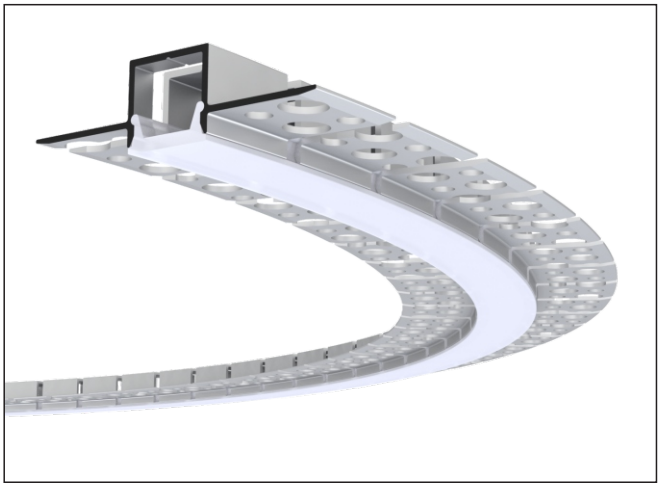



Inward bending effect

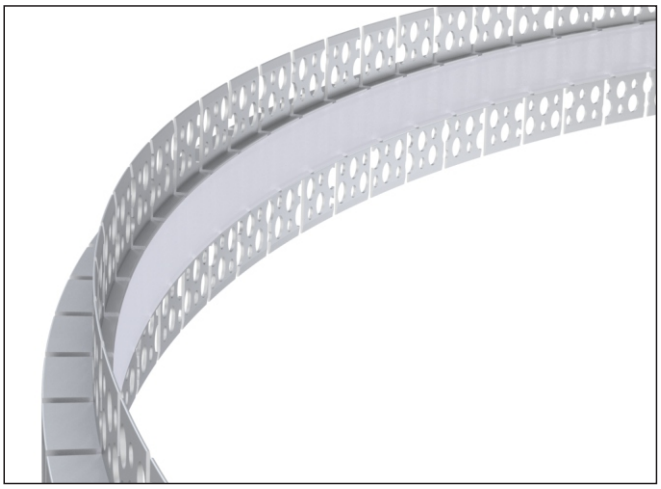



External bending effect

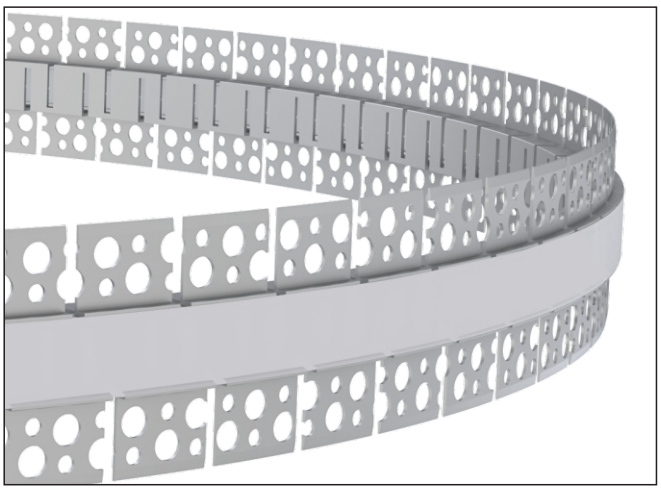

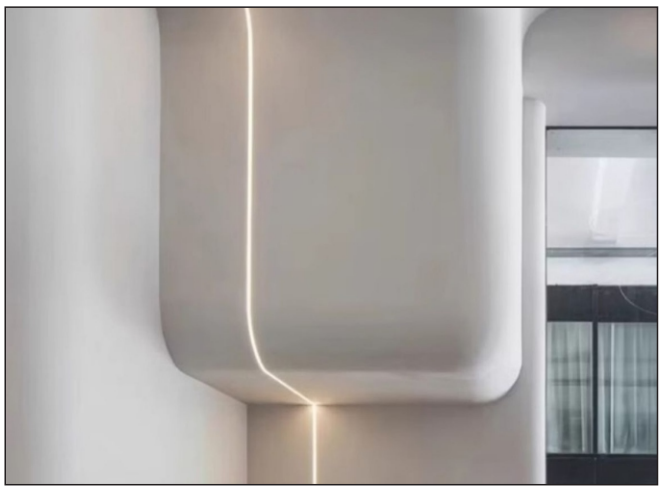

Free bending, free shaping

L881

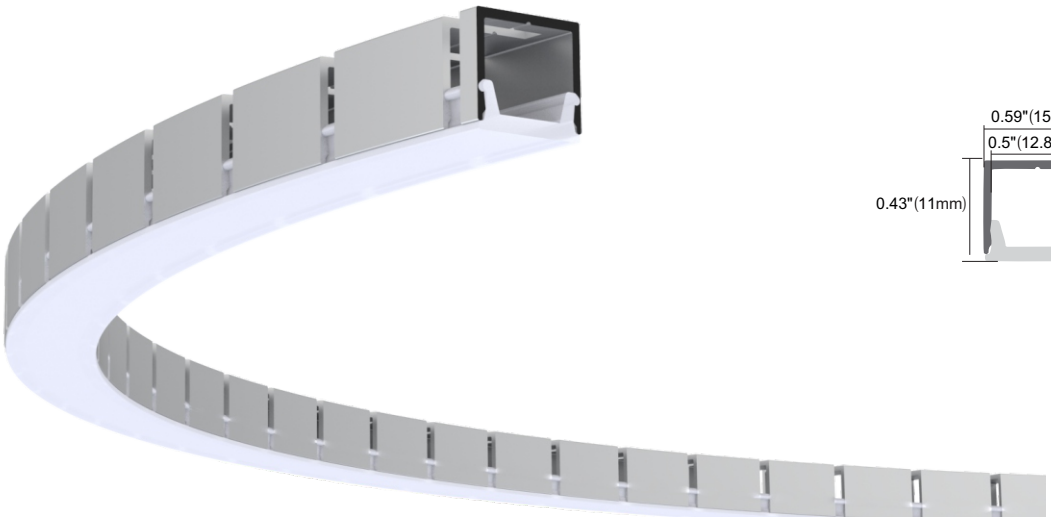

0.59"(15mm)
0.5"(12.8mm)
0.43"(11mm)

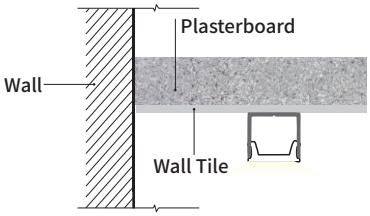
Plasterboard
Wall
Wall Tile

L882

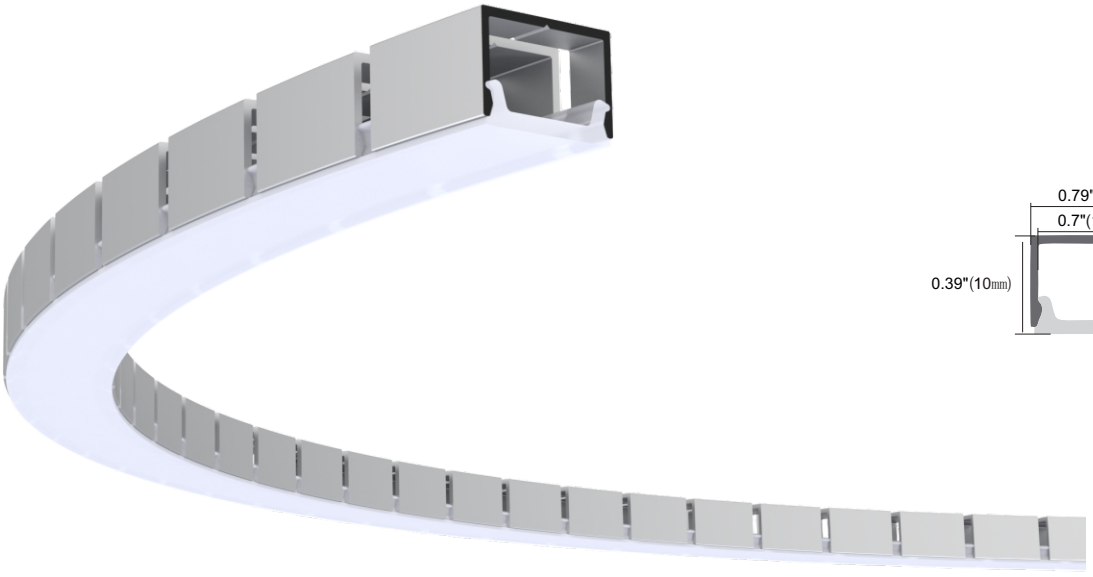

0.79"(20mm)
0.7"(17.8mm)
0.39"(10mm)

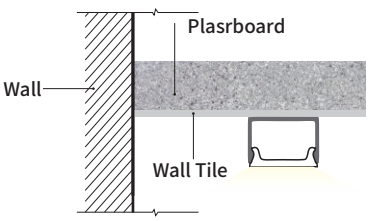
Plasrboard
Wall
Wall Tile

L868

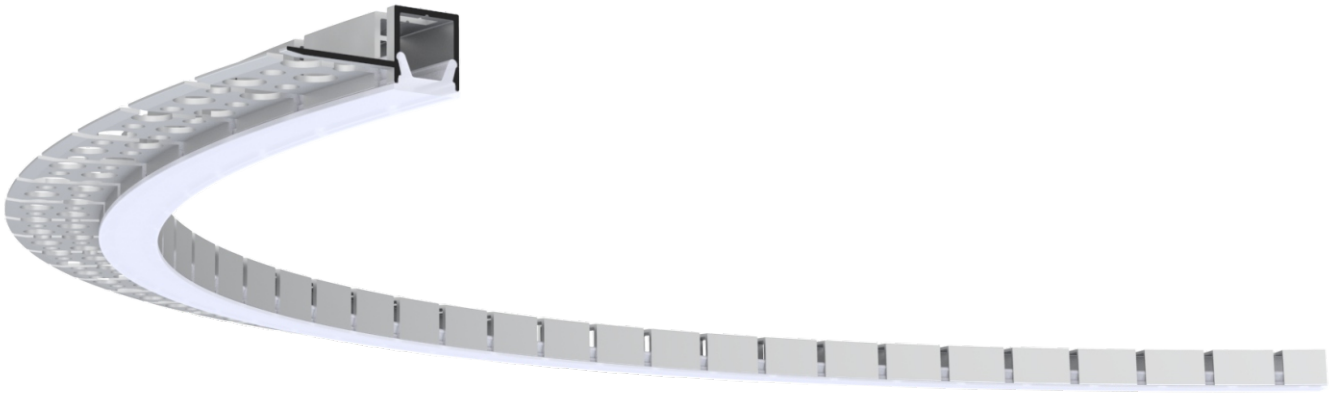

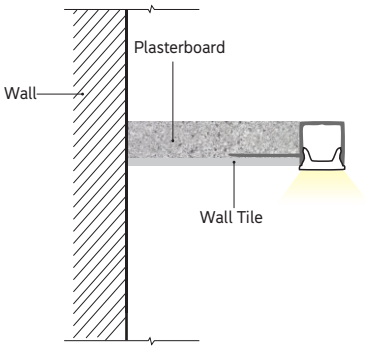
Plasterboard
Wall
Wall Tile

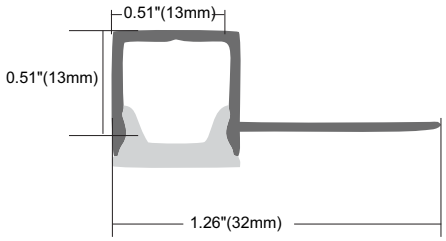
0.51"(13mm)
0.51"(13mm)
1.26"(32mm)

L872

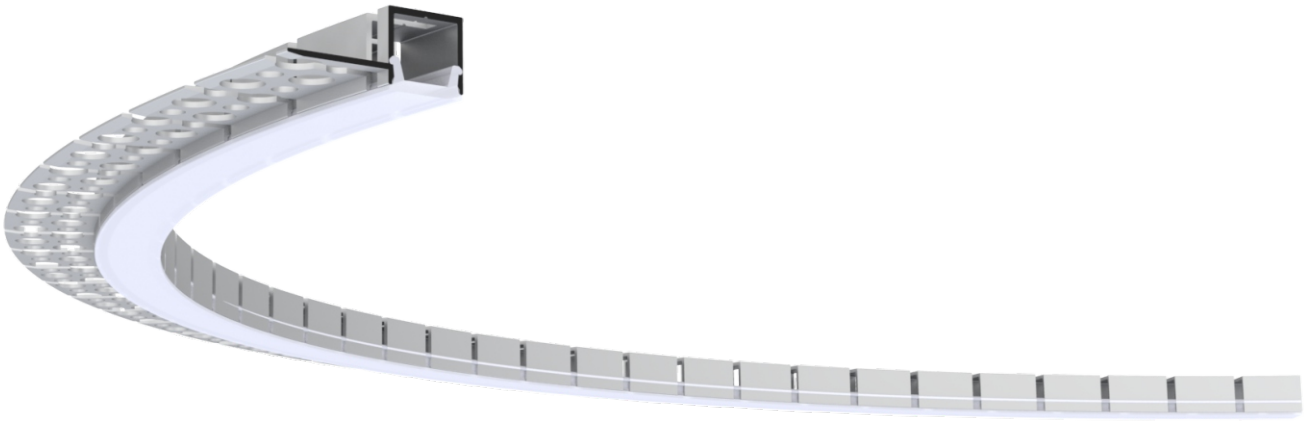

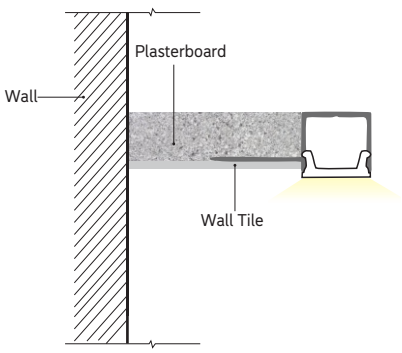
Plasterboard
Wall
Wall Tile

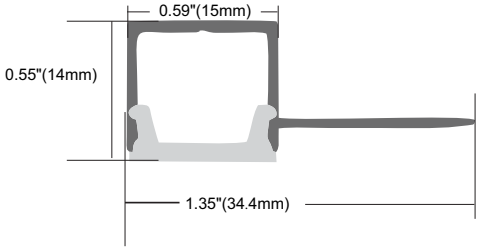
0.59"(15mm)
0.55"(14mm)
1.35"(34.4mm)

L876

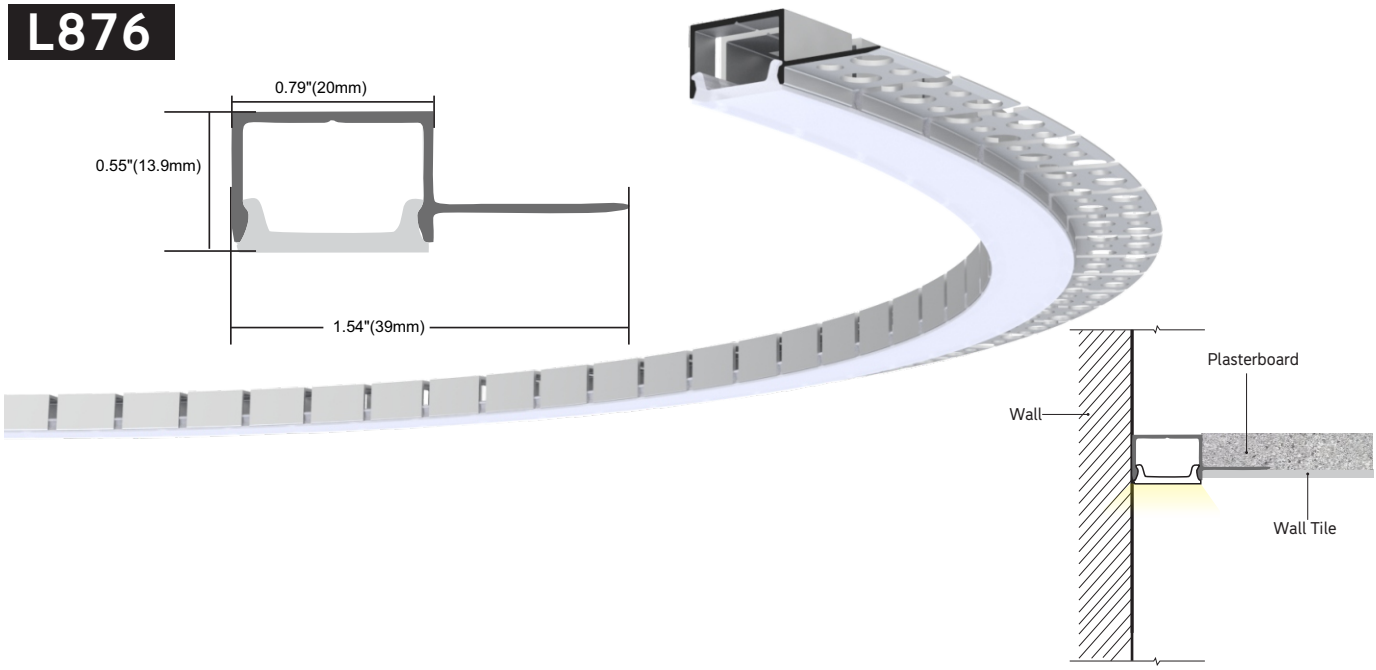

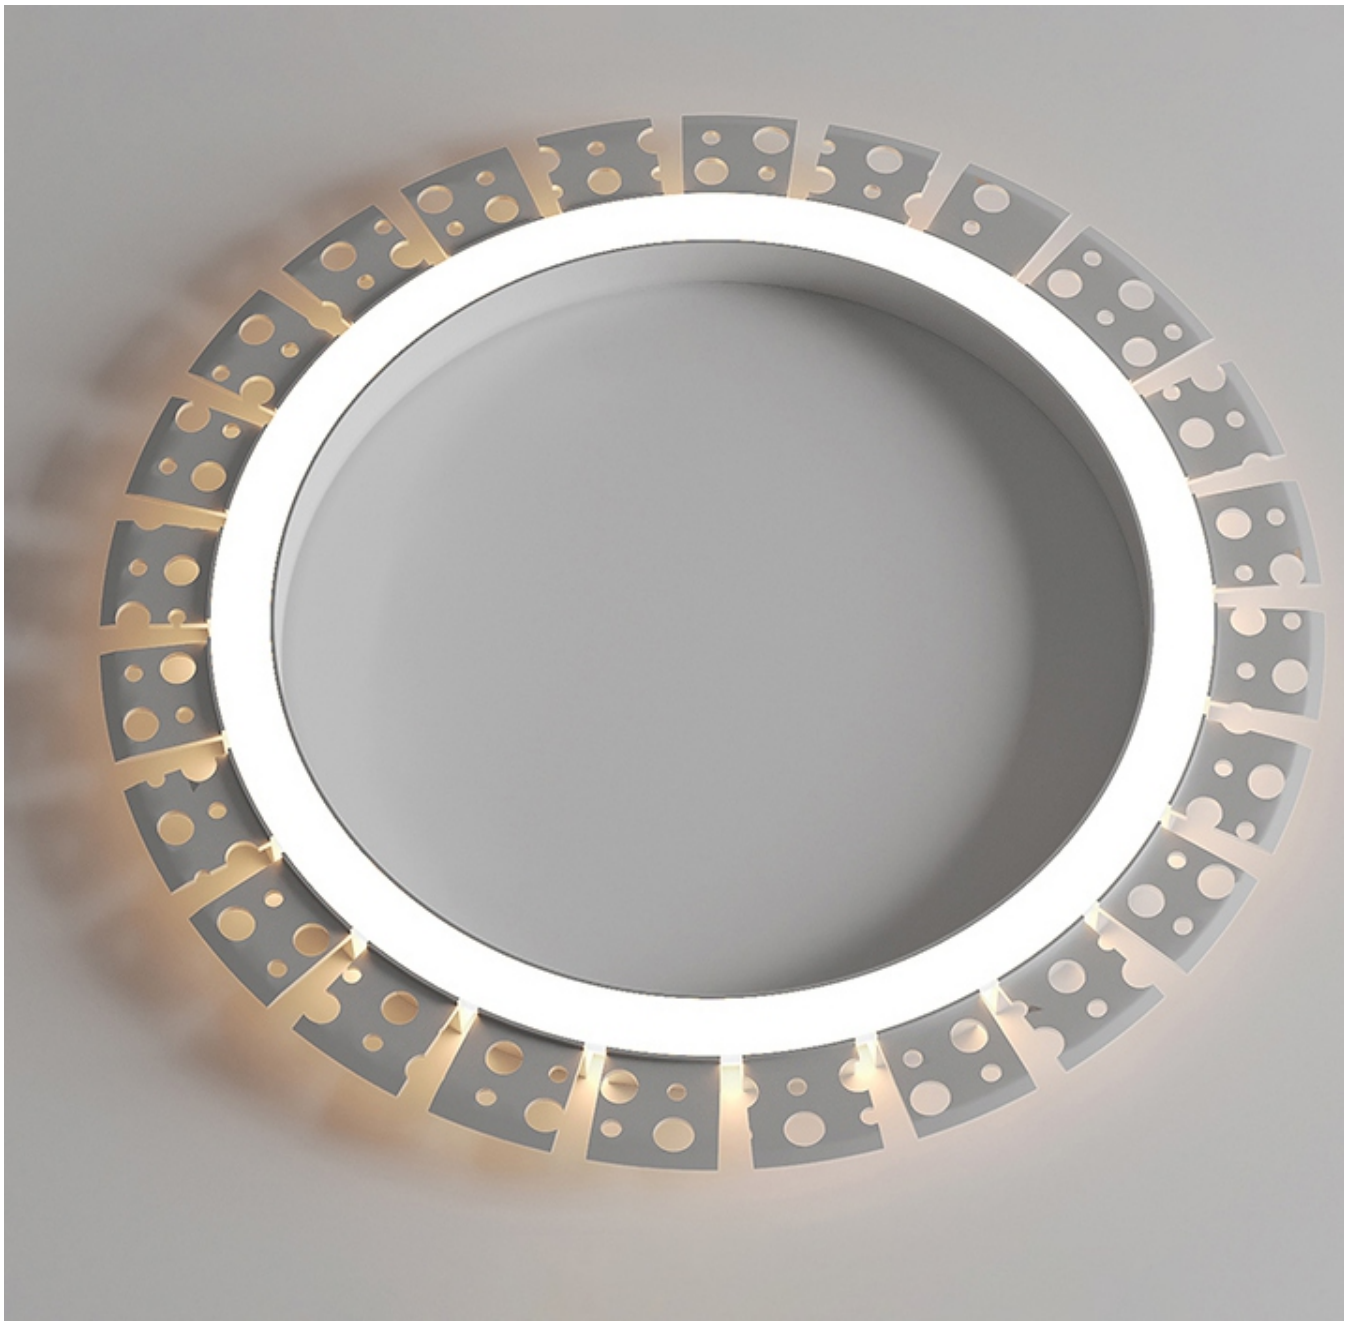

L870

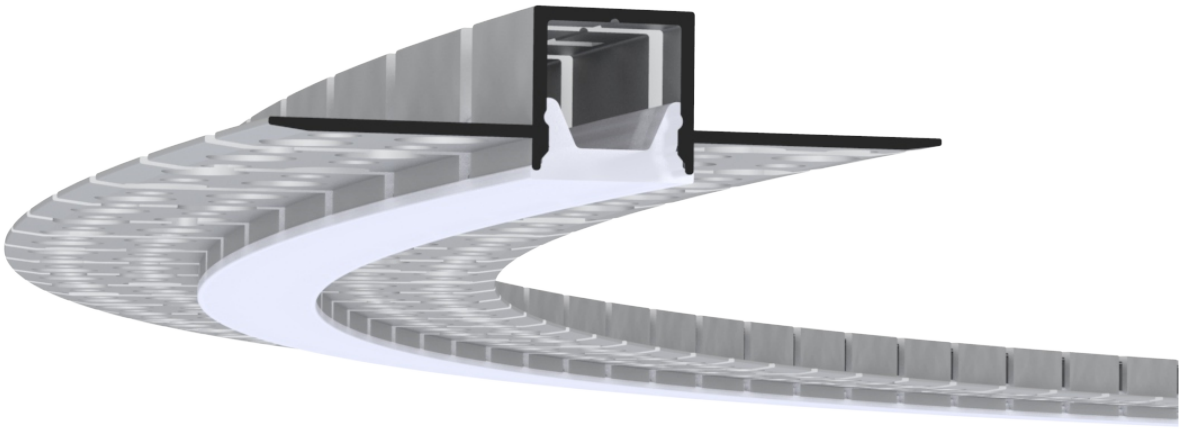

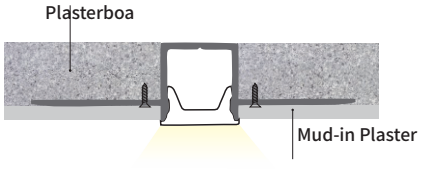
Plasterboa
Mud-in Plaster

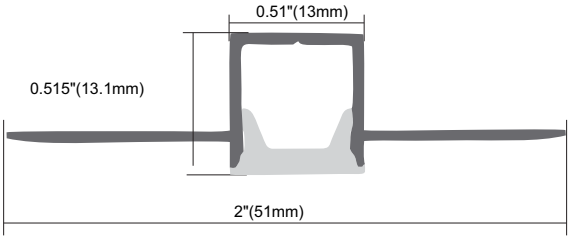
0.51"(13mm)
0.515"(13.1mm)
2"(51mm)

L874

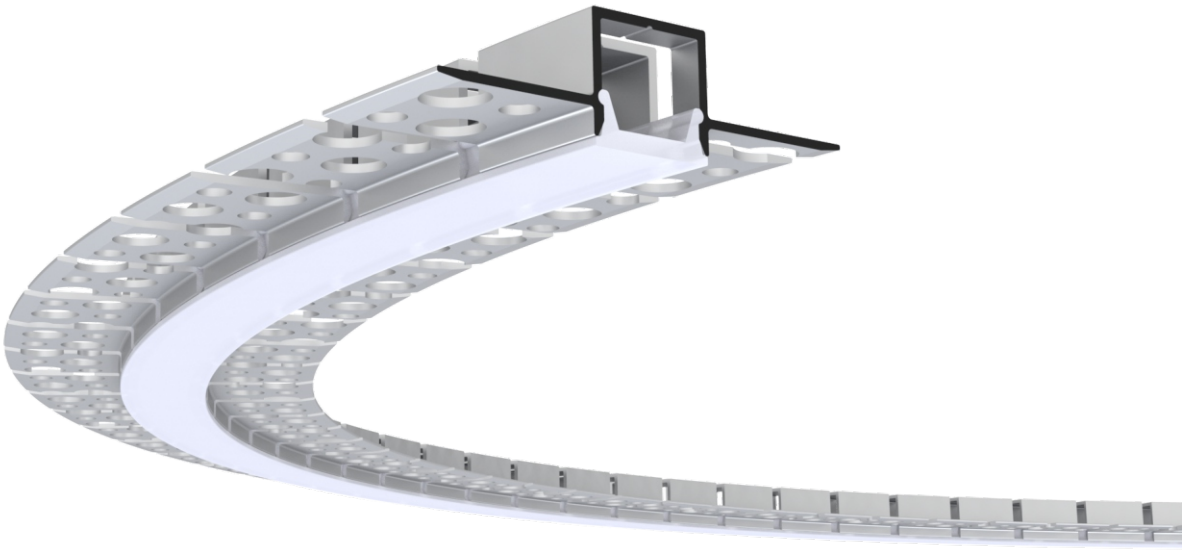

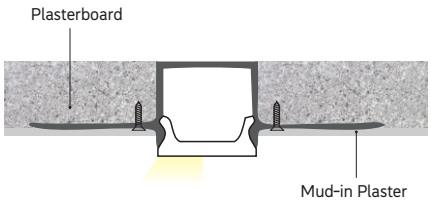
Plasterboard
Mud-in Plaster

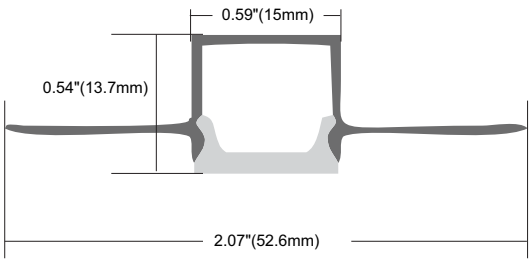
0.59"(15mm)
0.54"(13.7mm)
2.07"(52.6mm)

L888

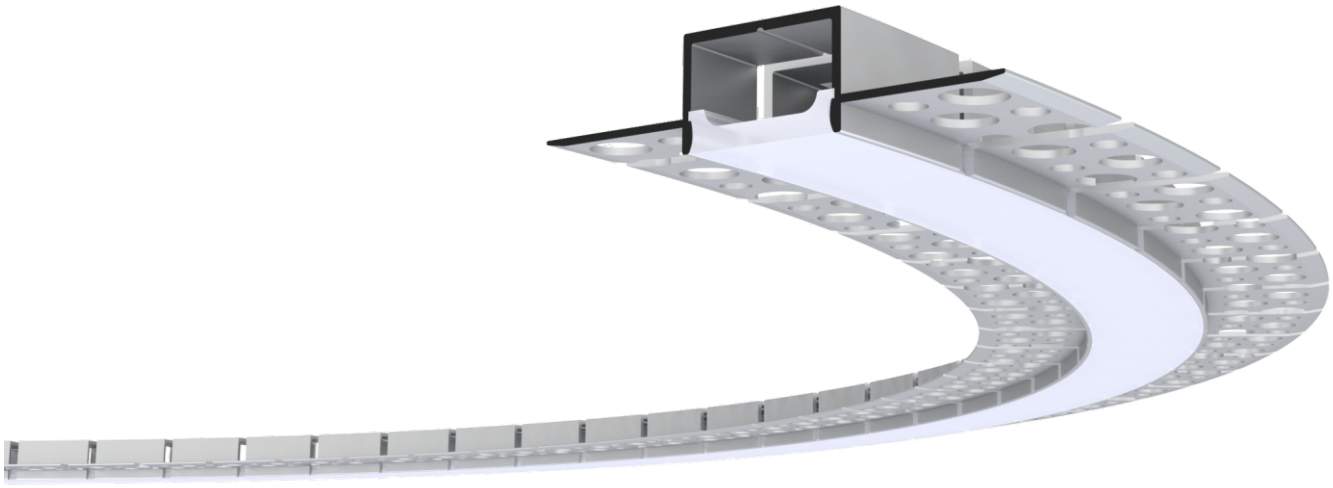

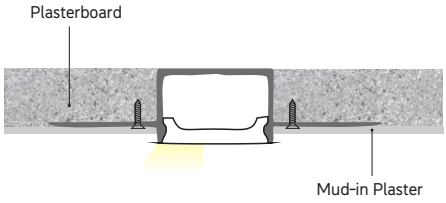
Plasterboard
Mud-in Plaster

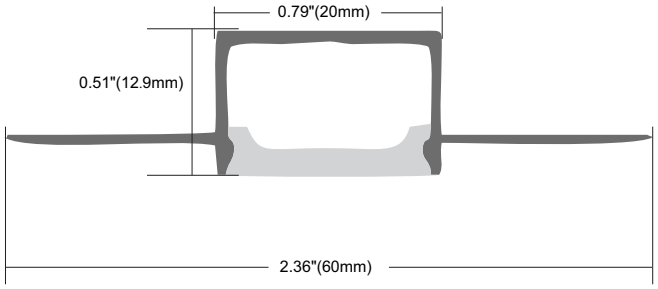
0.79"(20mm)
0.51"(12.9mm)
2.36"(60mm)

L878

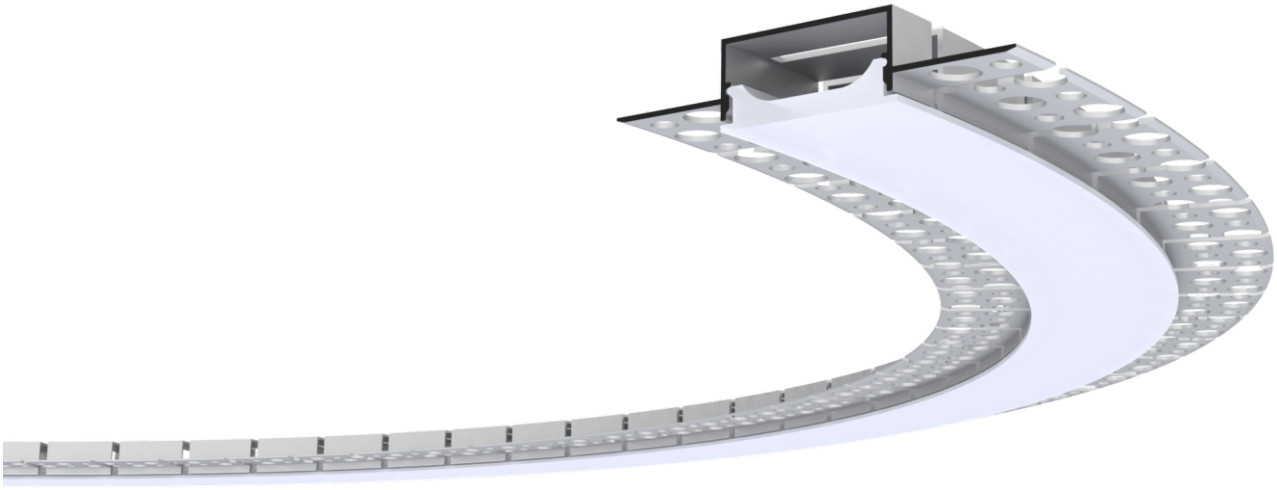

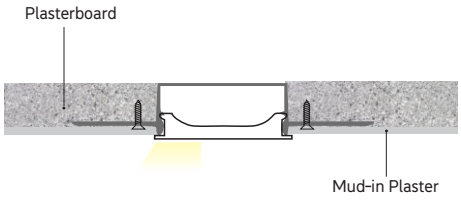
Plasterboard
Mud-in Plaster

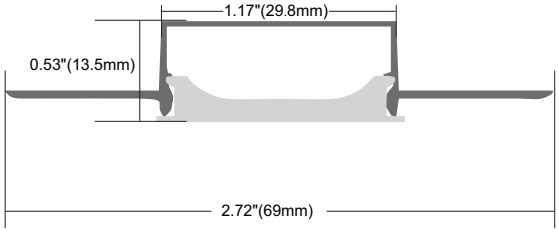
1.17"(29.8mm)
0.53"(13.5mm)
2.72"(69mm)

L886

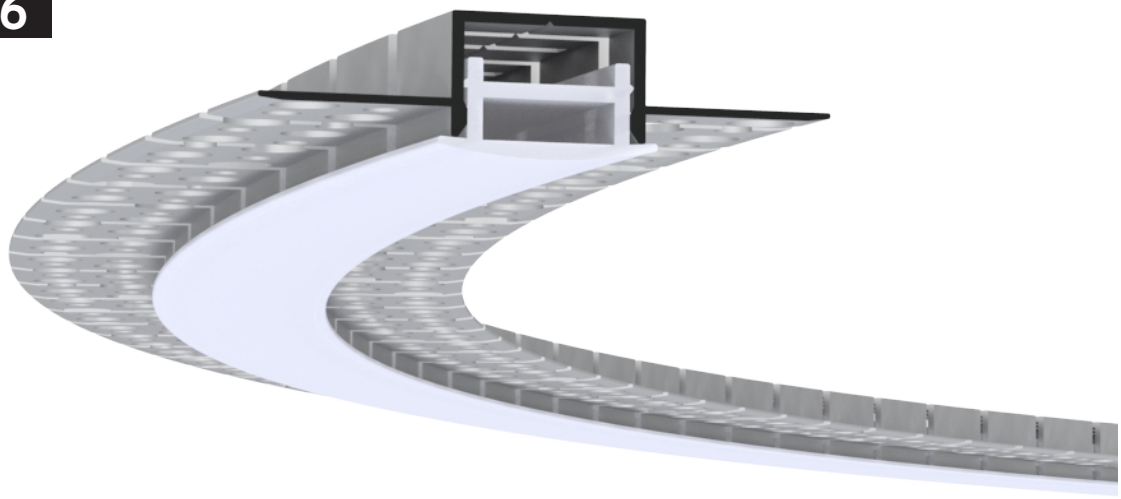

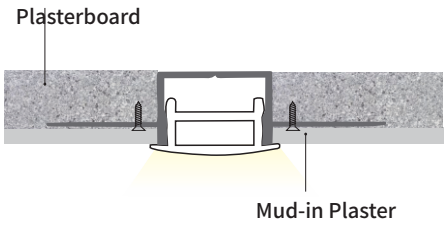
Plasterboard
Mud-in Plaster

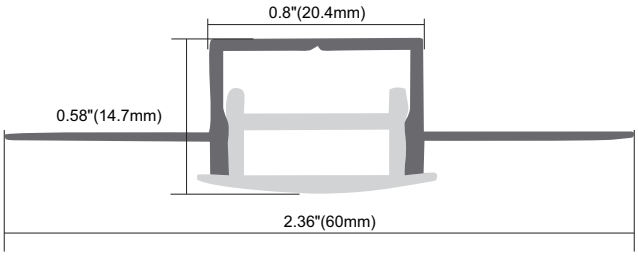
0.8"(20.4mm)
0.58"(14.7mm)
2.36"(60mm)

L880

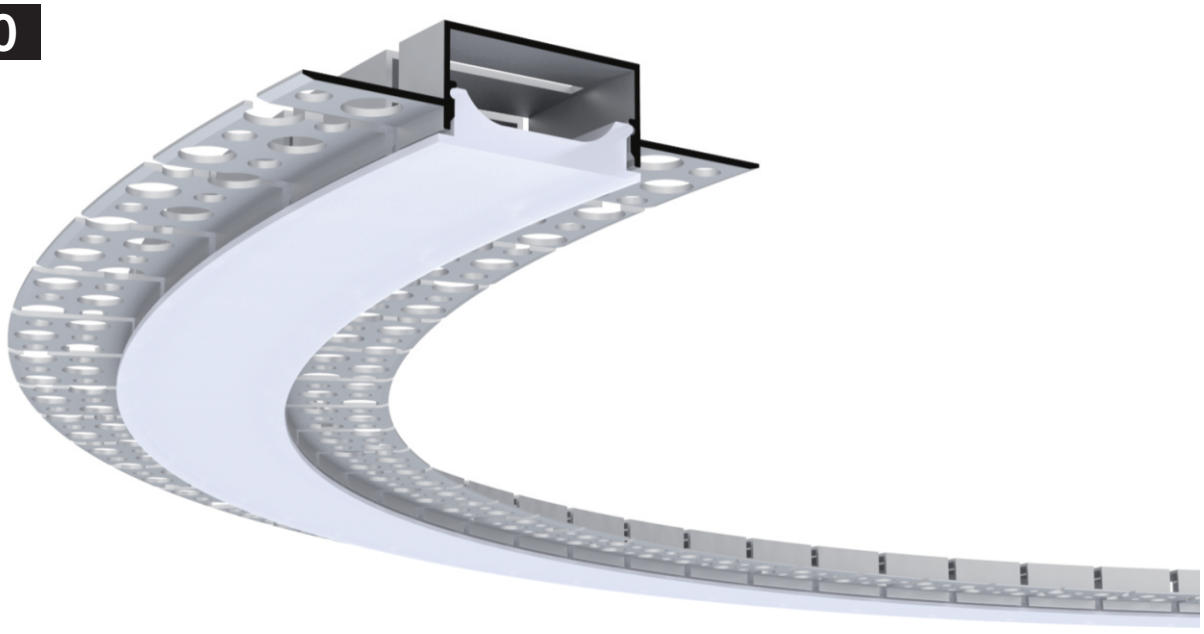

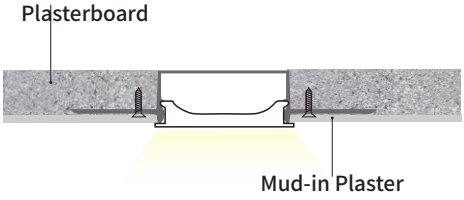
Plasterboard
Mud-in Plaster

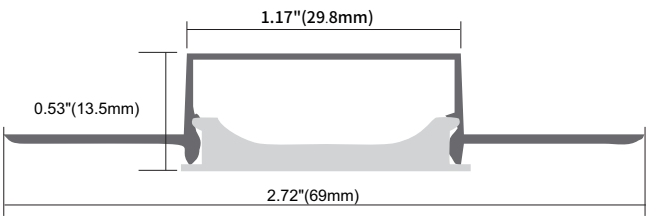
1.17"(29.8mm)
0.53"(13.5mm)
2.72"(69mm)

L873

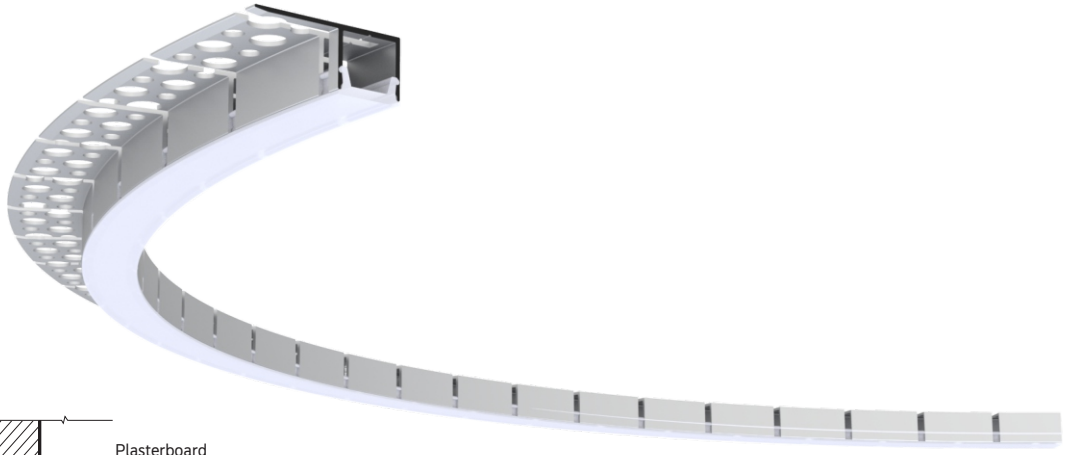

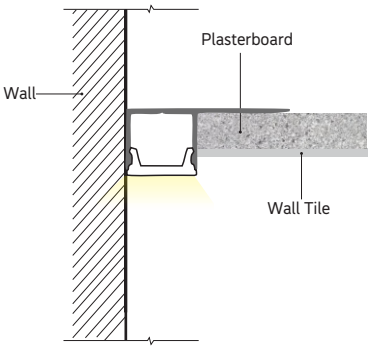
Plasterboard
Wall
Wall Tile

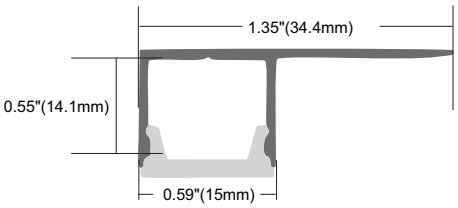
1.35"(34.4mm)
0.55"(14.1mm)
0.59"(15mm)

L877

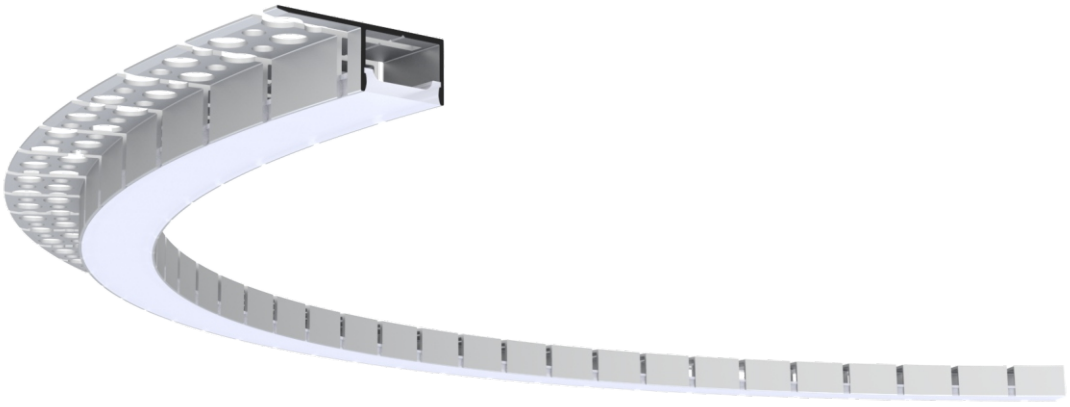

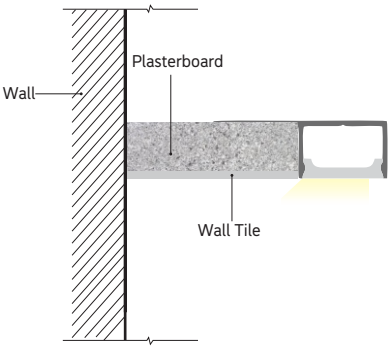
Plasterboard
Wall
Wall Tile

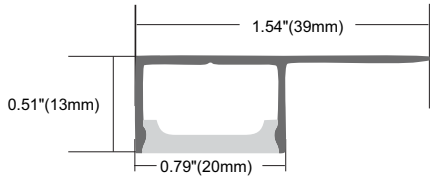
1.54"(39mm)
0.51"(13mm)
0.79"(20mm)

L871

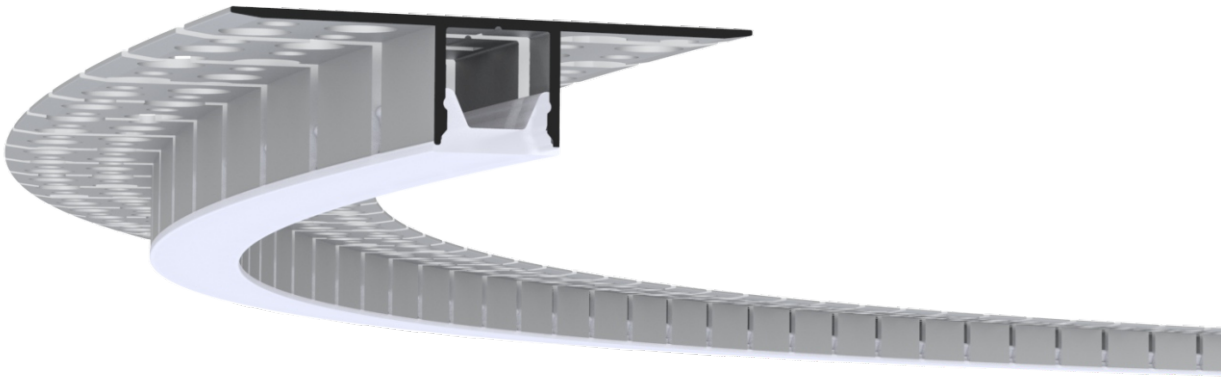

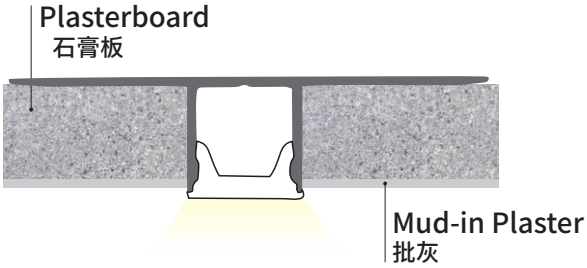
Plasterboard
石膏板
Mud-in Plaster
批灰

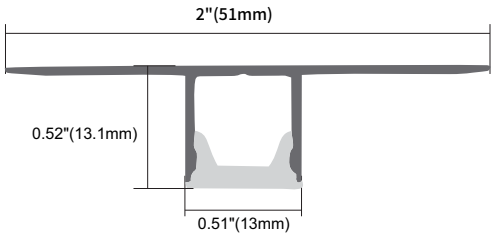
2"(51mm)
0.52"(13.1mm)
0.51"(13mm)

L875

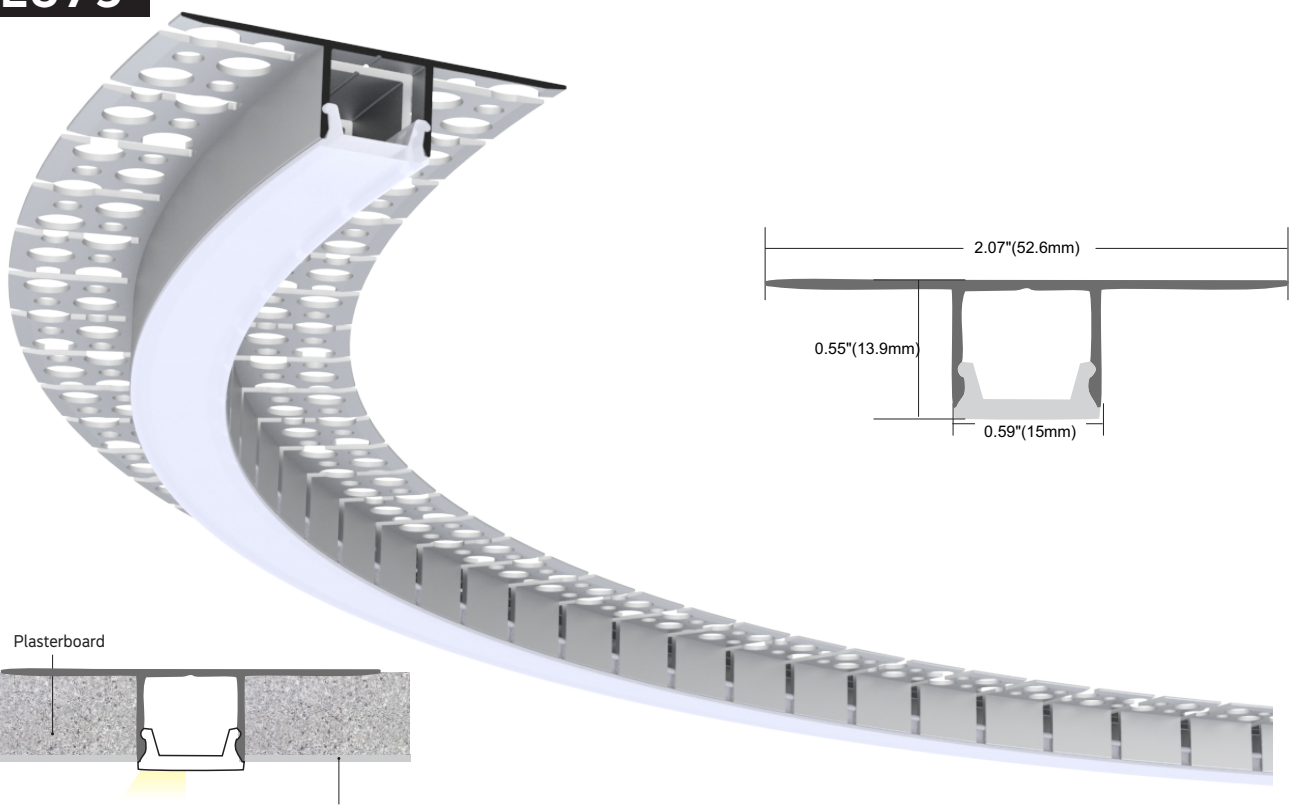

Plasterboard
Mud-in Plaster

2.07"(52.6mm)
0.55"(13.9mm)
0.59"(15mm)

L879

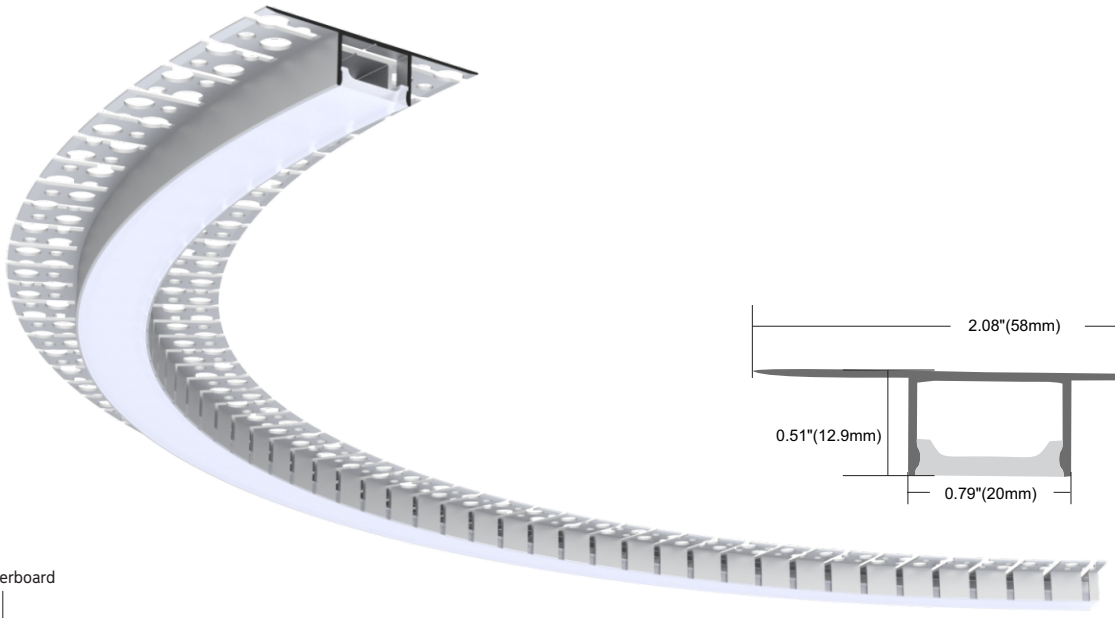

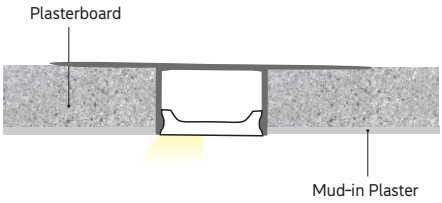



L883

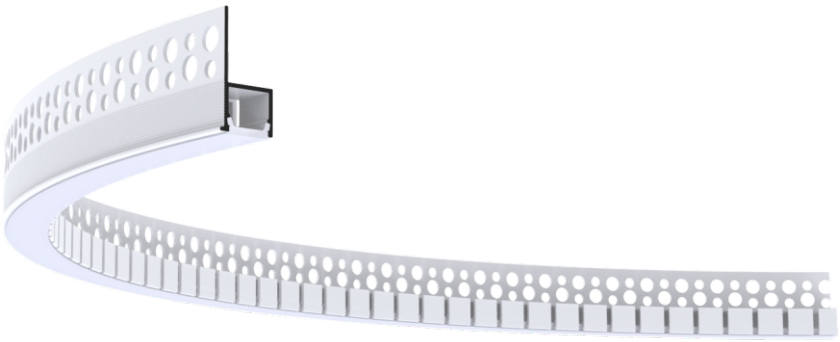

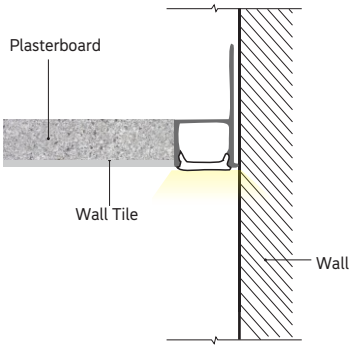
Plasterboard
Wall Tile
Wall

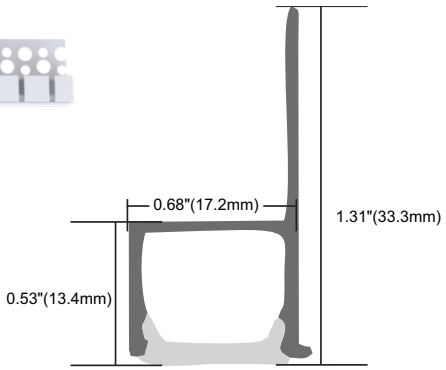
0.68"(17.2mm)
1.31"(33.3mm)
0.53"(13.4mm)

L884

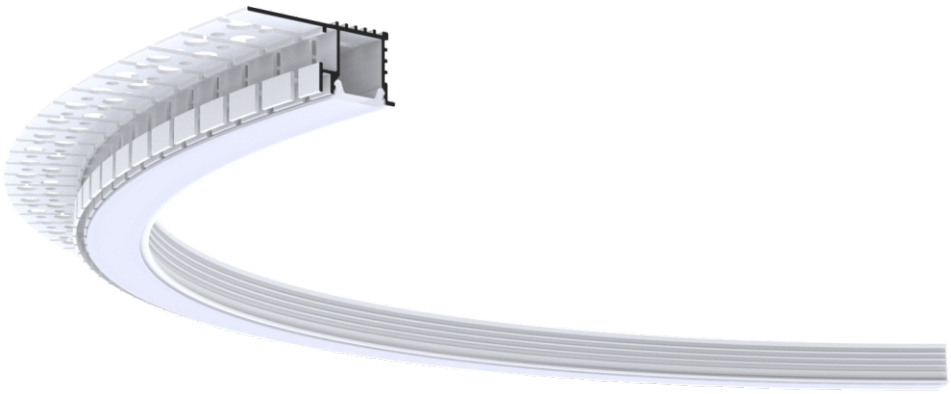

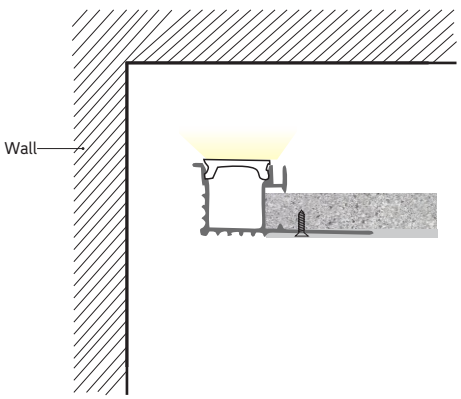
Wall

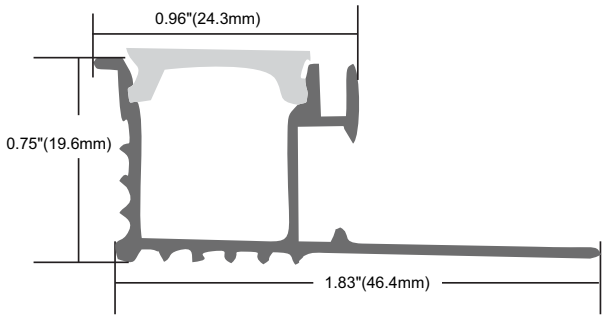
0.96"(24.3mm)
0.75"(19.6mm)
1.83"(46.4mm)

L885

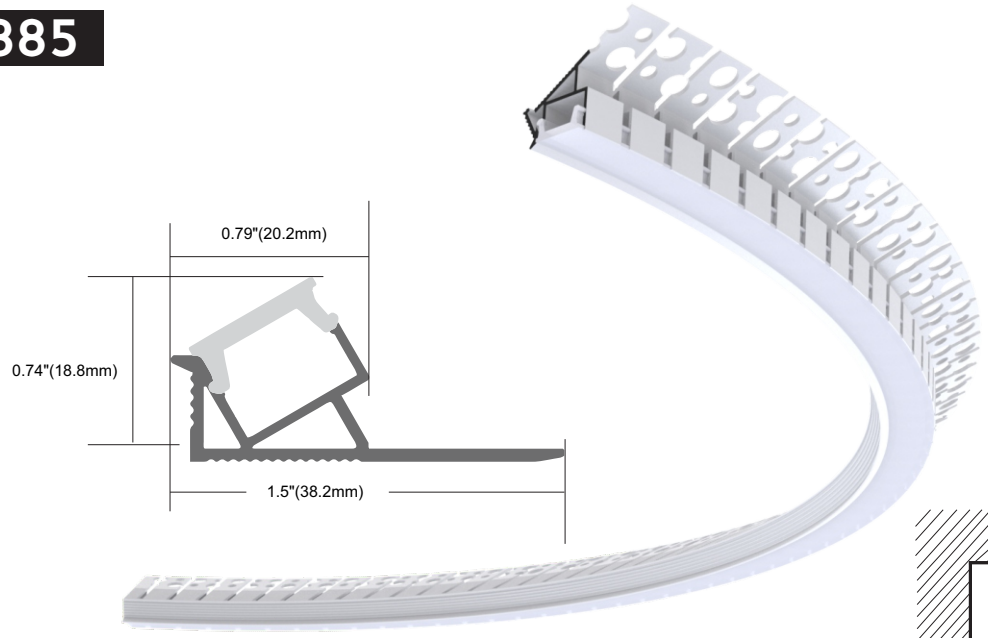

0.79"(20.2mm)
0.74"(18.8mm)
1.5"(38.2mm)

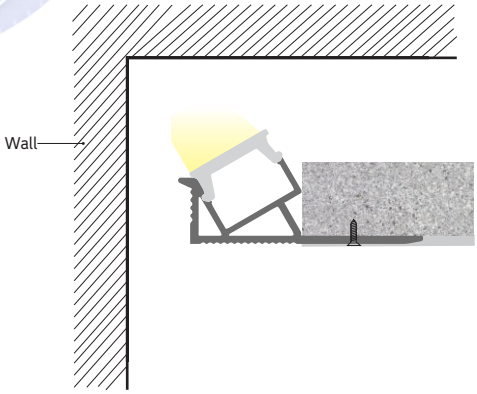
Wall


HOMAGE TO BREAKFAST
HOMAGE TO BREAKFAST

Plastenin Serfes

Application





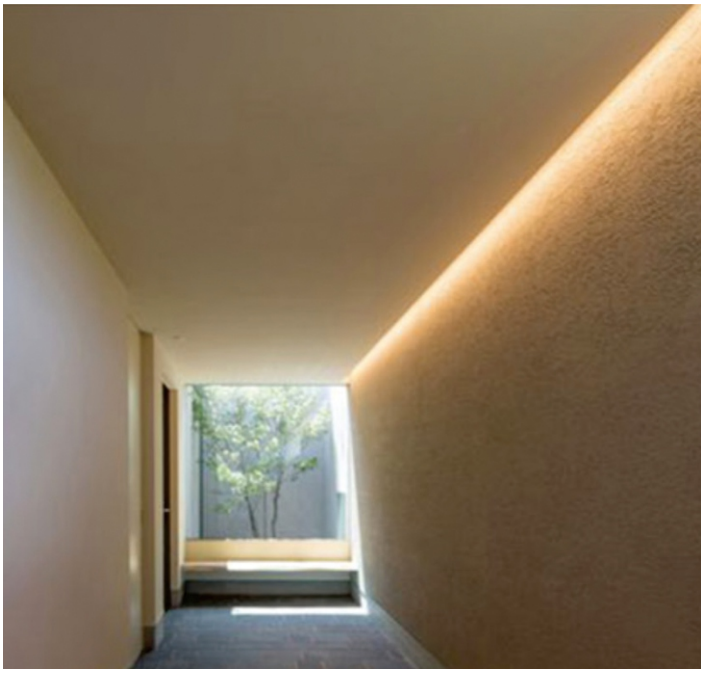





L241

Plastenin Serfes

Types of Installation:





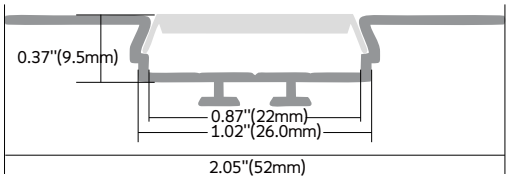

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

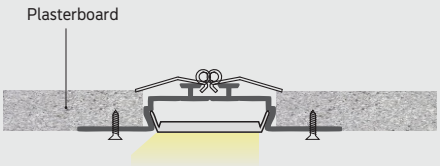

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:





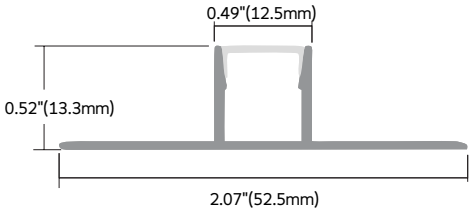

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

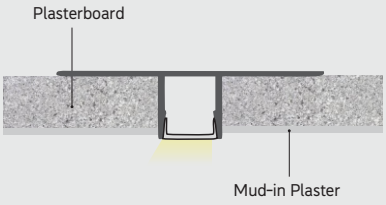

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



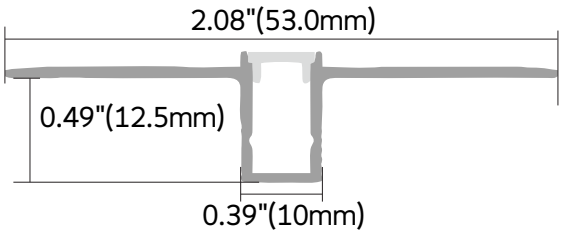

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
black/Prismatic Frosted

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

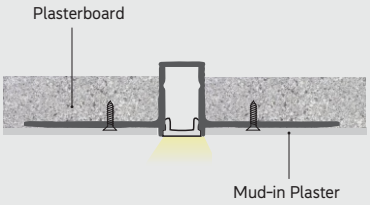

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L276B

Plastenin Serfes

Types of Installation:

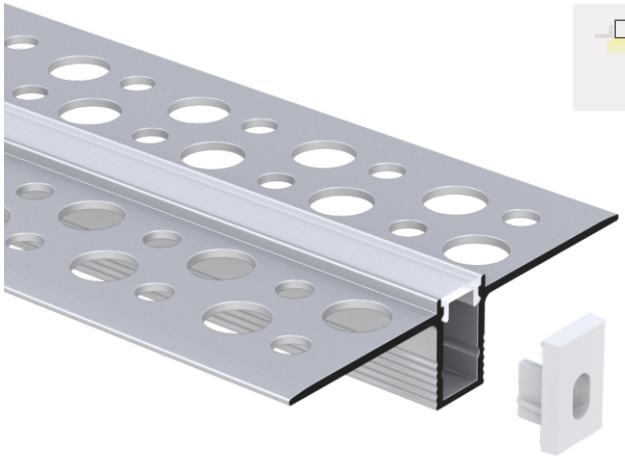



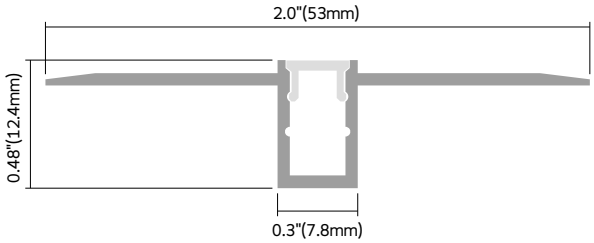

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



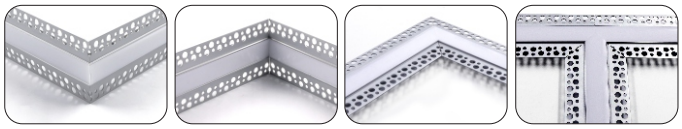

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

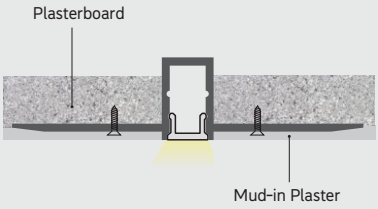

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L659

Plastenin Serfes

Types of Installation:



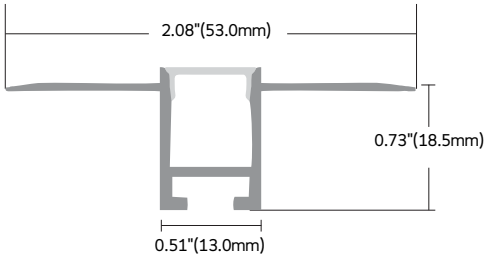

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
Prismatic Frosted

MMA

P

opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

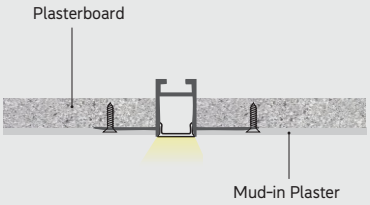

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:

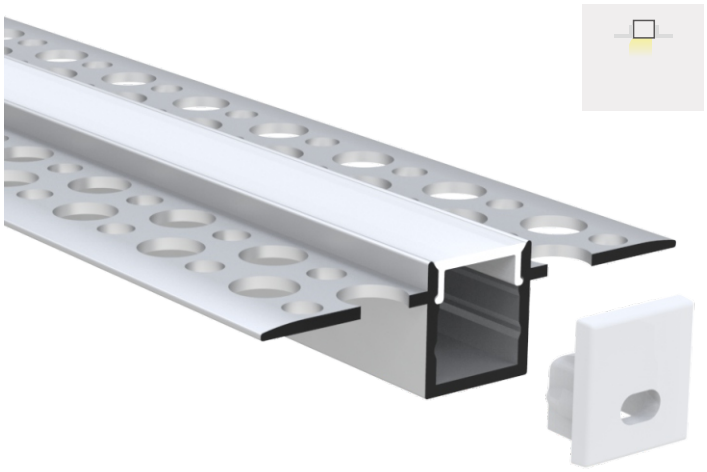

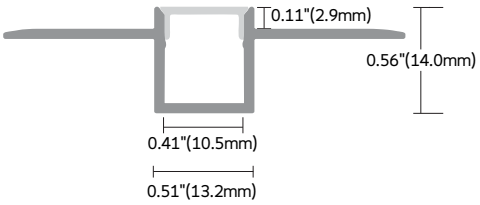

Profile color

- Black
- Silver
- White

Profile Components



PC
opal matte /diffused/
Prismatic Frosted

MMA
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



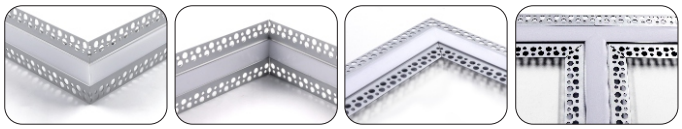

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

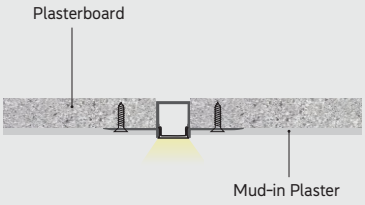

Effect Image

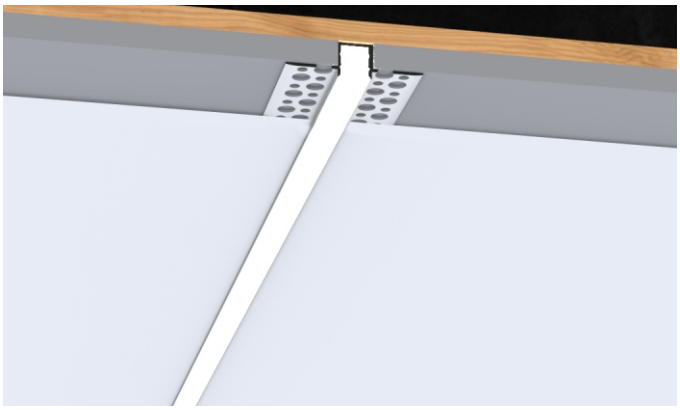

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L549

Plastenin Serfes

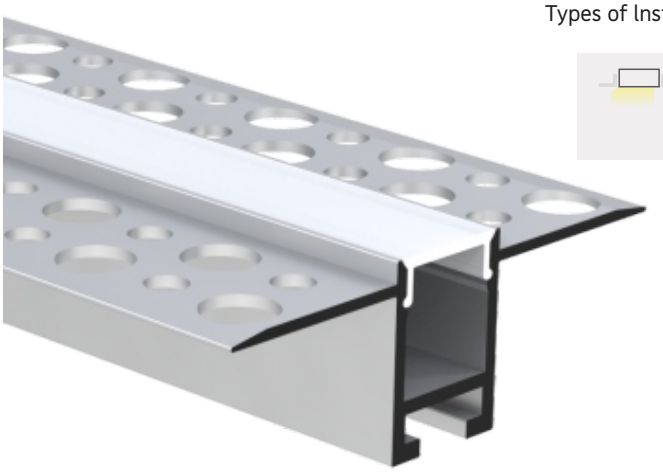

Types of Installation:

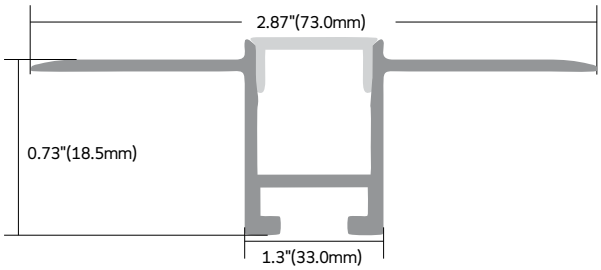

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

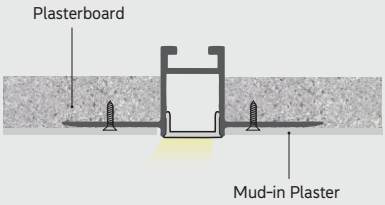

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:





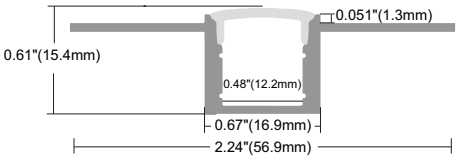

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2





90° Outside connector



90° Inside connector



L connector



T connector

Structure Image

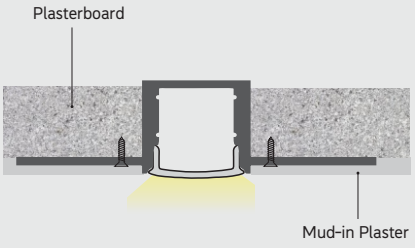

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L157

Plastenin Serfes

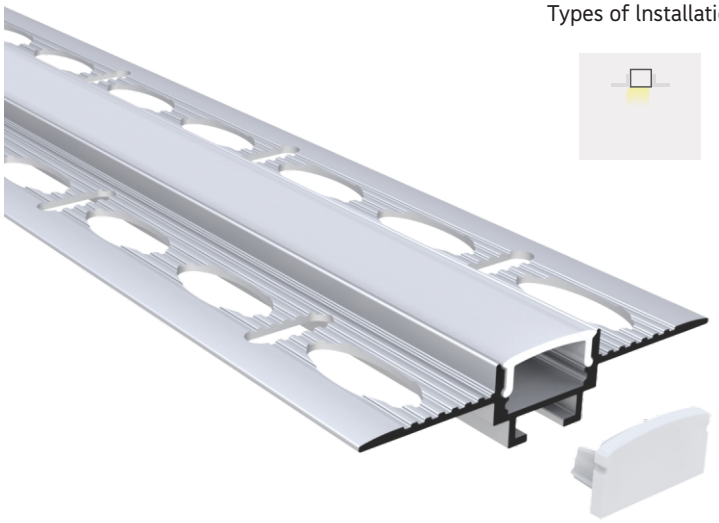

Types of Installation:

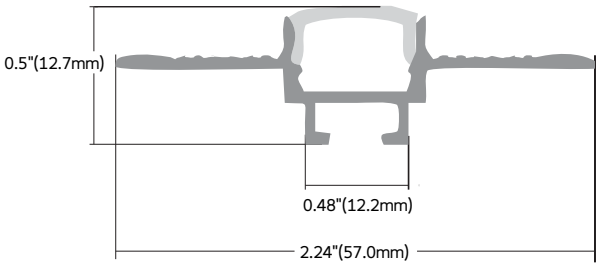

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



MMA
P

opal matte /diffused/ clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

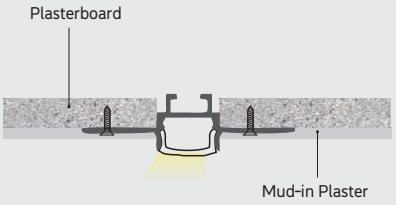

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L303

Plastenin Serfes

Types of Installation:

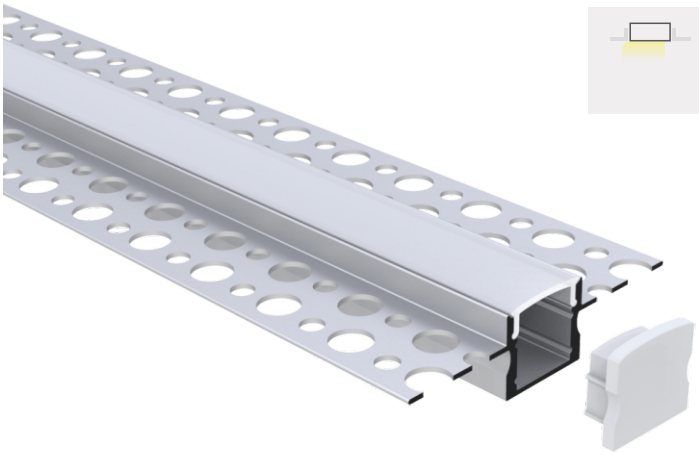

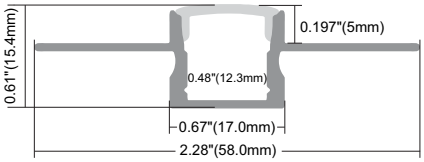

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



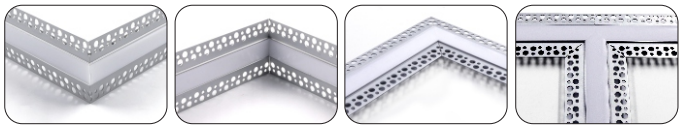

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

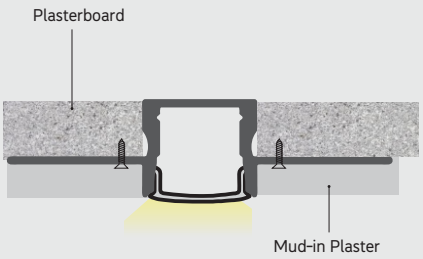

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L340

Types of Installation:





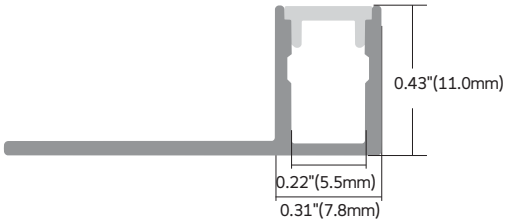

Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/
black/Prismatic Frosted

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

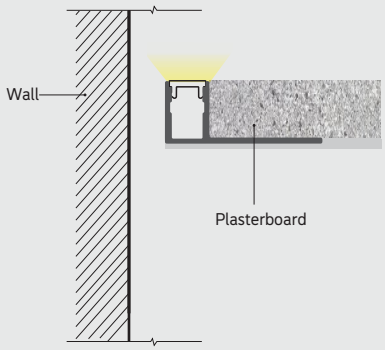

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



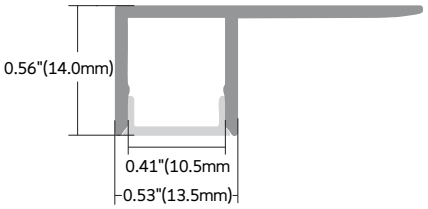

Profile color

- Black
- Silver
- White

Profile Components



PC
opal matte /diffused/
Prismatic Frosted

MMA
P
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

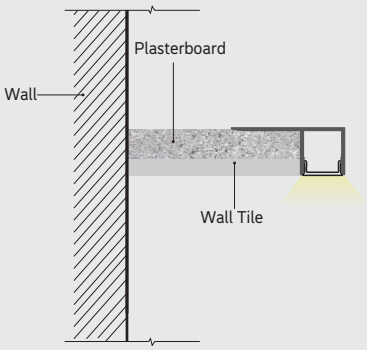

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L314

Types of Installation:



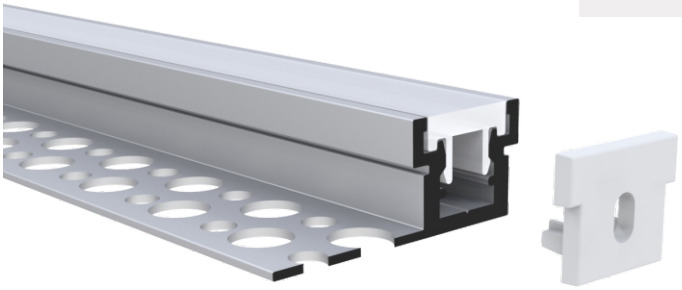

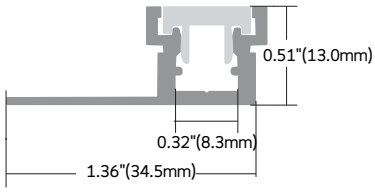

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Structure Image

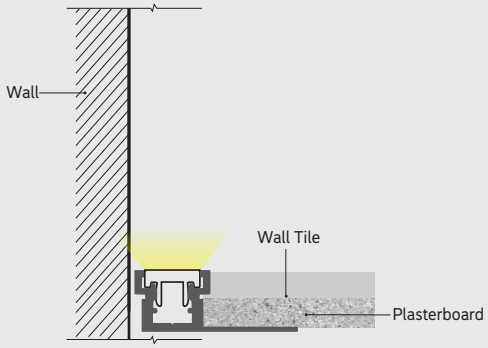

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:





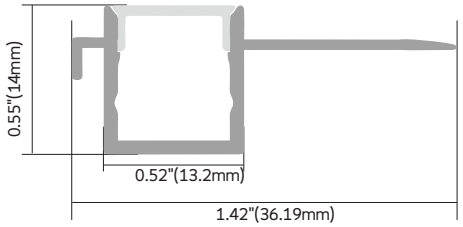

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused/
black/Prismatic Frosted

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Structure Image

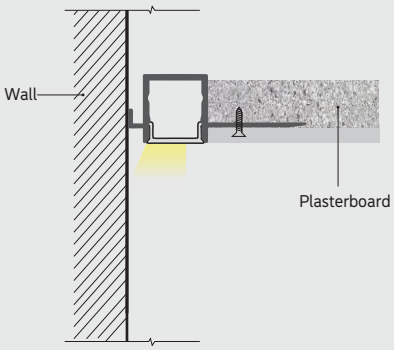

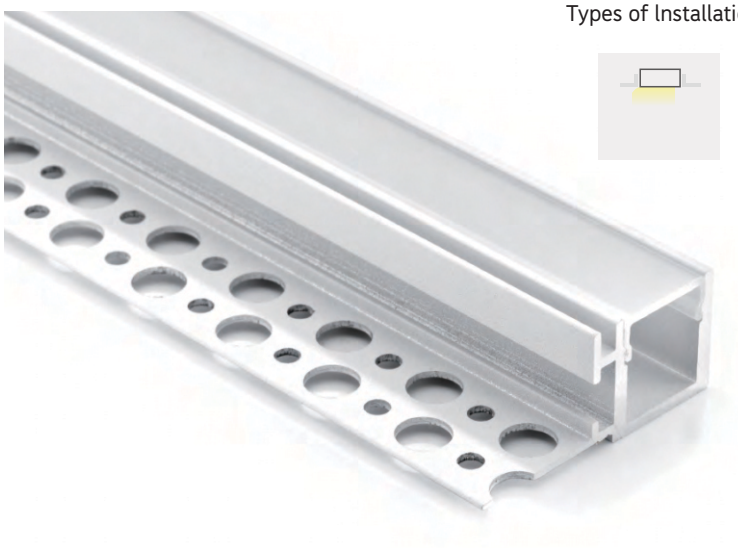

Types of Installation:

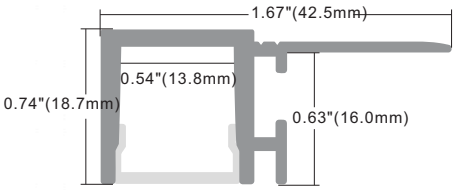

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

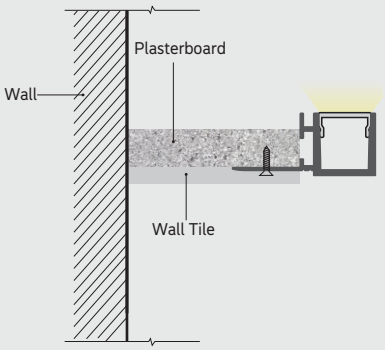

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:

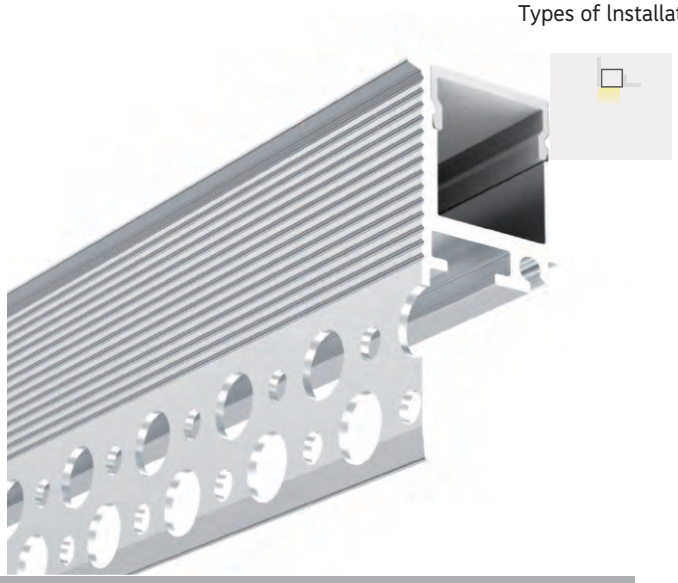

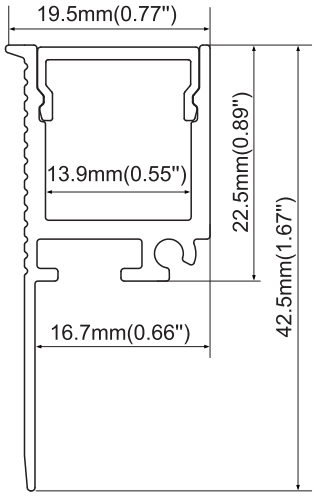

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Structure Image

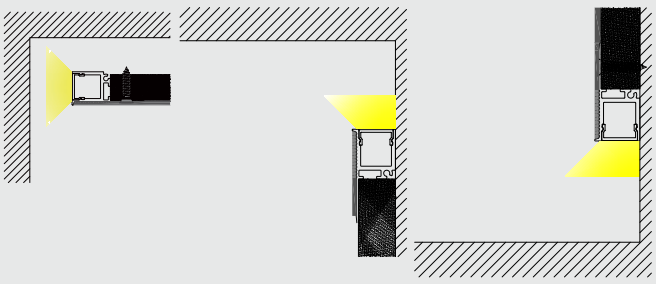

L240

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Mounting clip



Structure Image

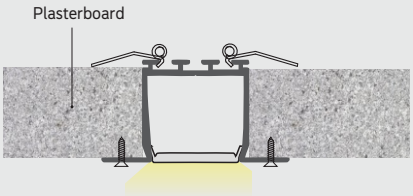

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L156A

Plastenin Serfes

Types of Installation:



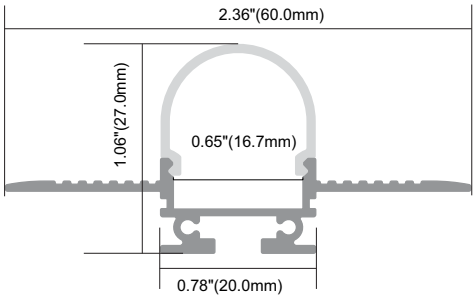

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

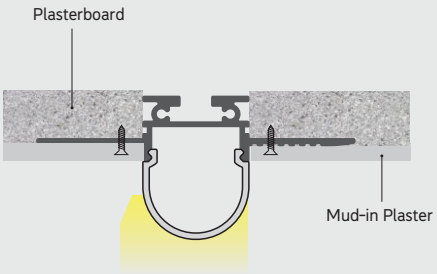

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L156B

Plastenin Serfes

Types of Installation:





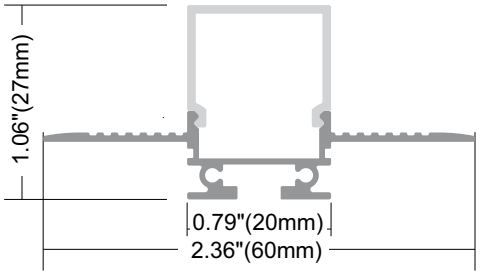

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

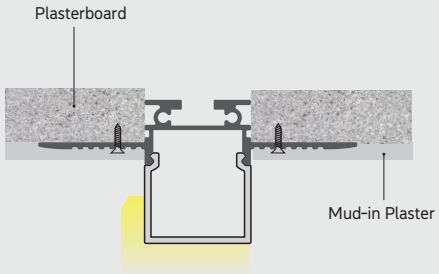

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L156C

Plastenin Serfes

Types of Installation:



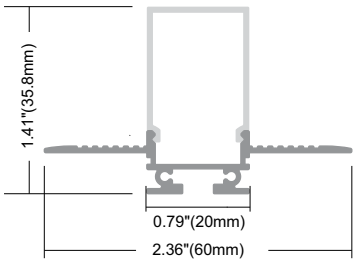

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

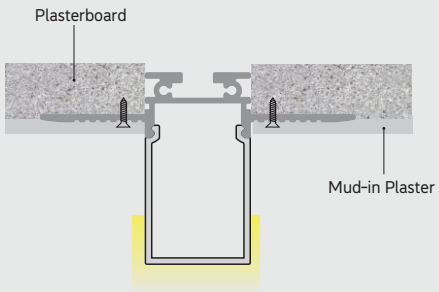

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

PL081

Plastenin Serfes

Types of Installation:

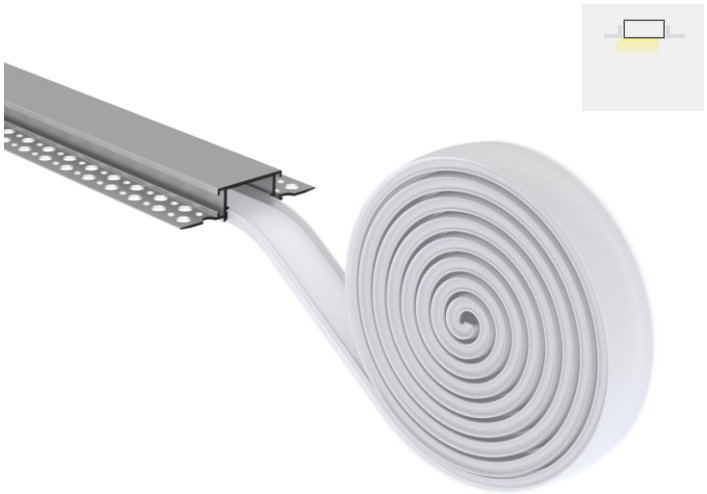

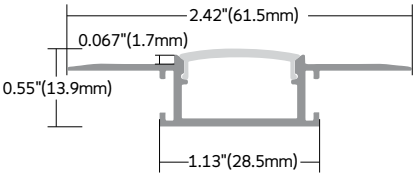

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/
Prismatic Frosted



MMA

P

opal matte /diffused/
clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Connector





90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

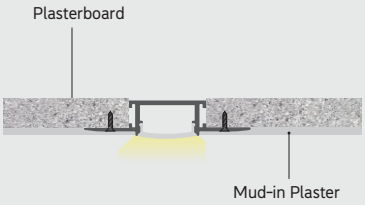

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L548

Plastenin Serfes

Types of Installation:

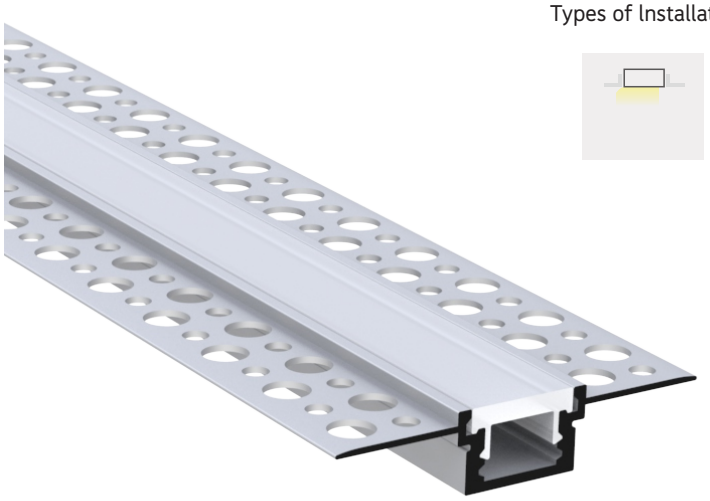

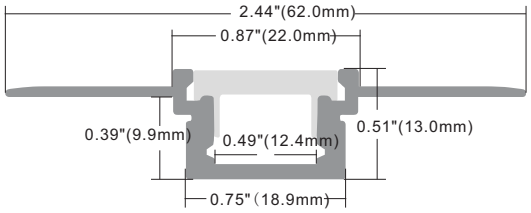

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

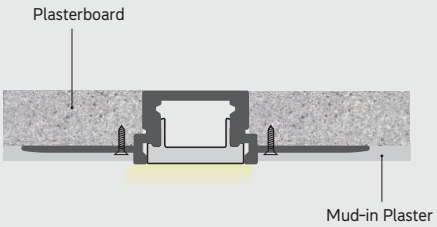

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



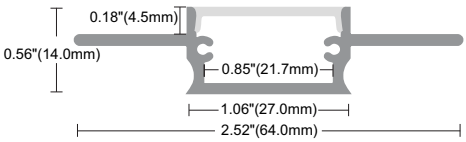

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2





90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

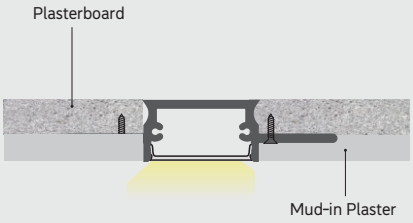

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L928

Plastenin Serfes

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

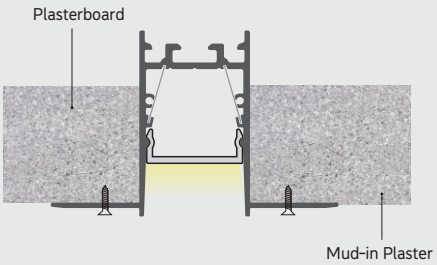

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L547A

Plastenin Serfes

Types of Installation:



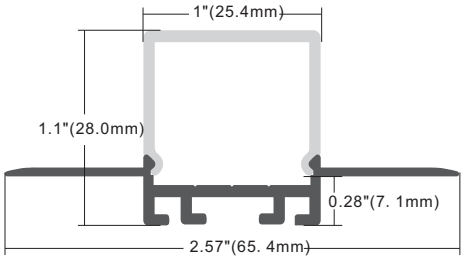

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

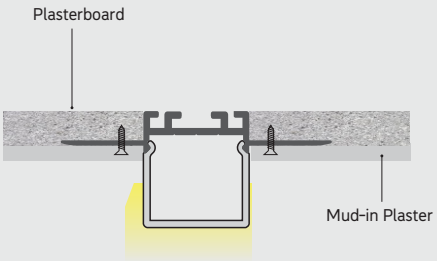

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L547B

Plastenin Serfes

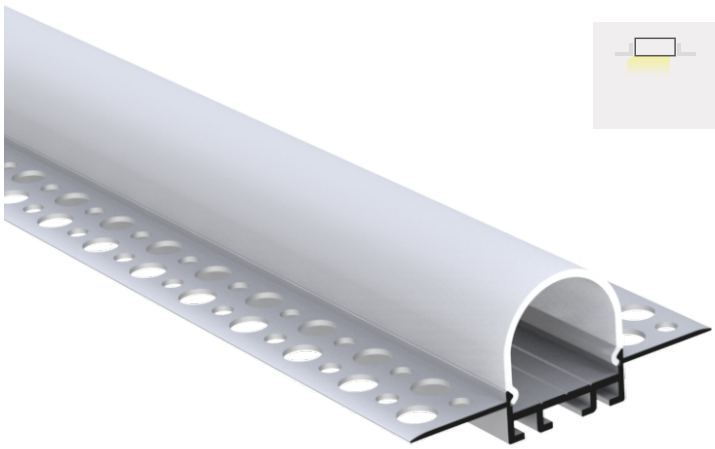

Types of Installation:

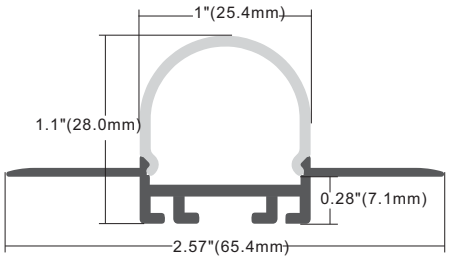

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

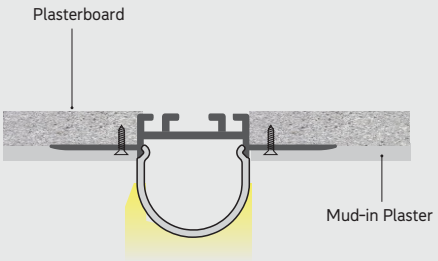

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L239

Plastenin Serfes

Types of Installation:





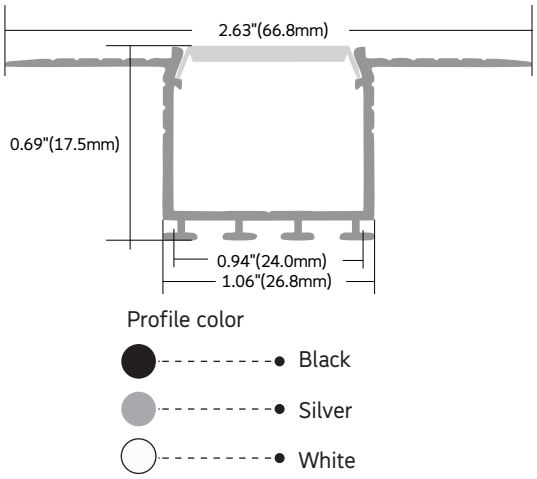

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

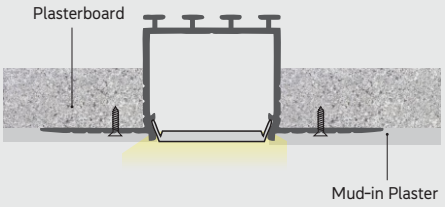

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



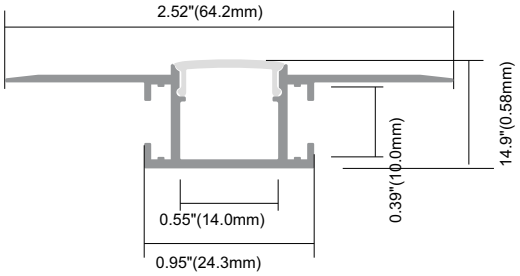

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2





90° Outside connector



90° Inside connector



L connector



T connector

Structure Image

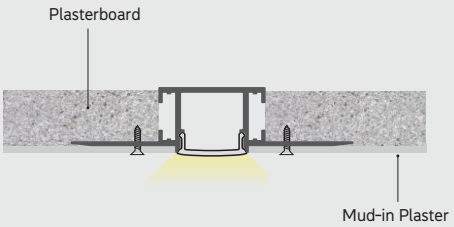

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L238

Types of Installation:



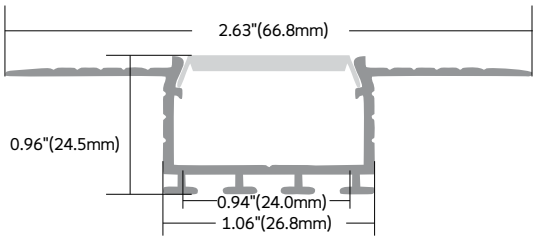

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

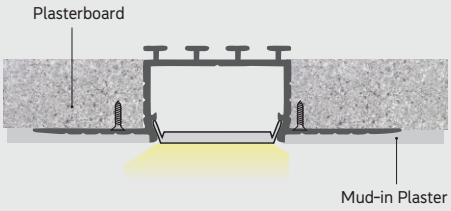

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

PL082

Plastenin Serfes

Types of Installation:



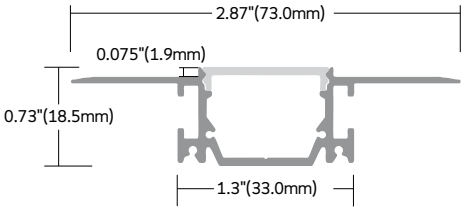

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Connector



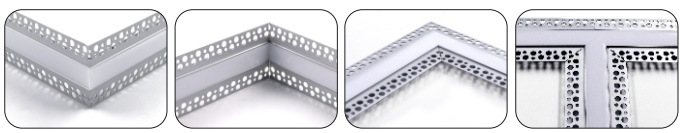

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

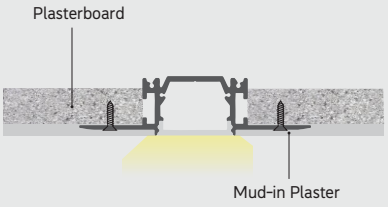

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

PL084

Plastenin Serfes

Types of Installation:

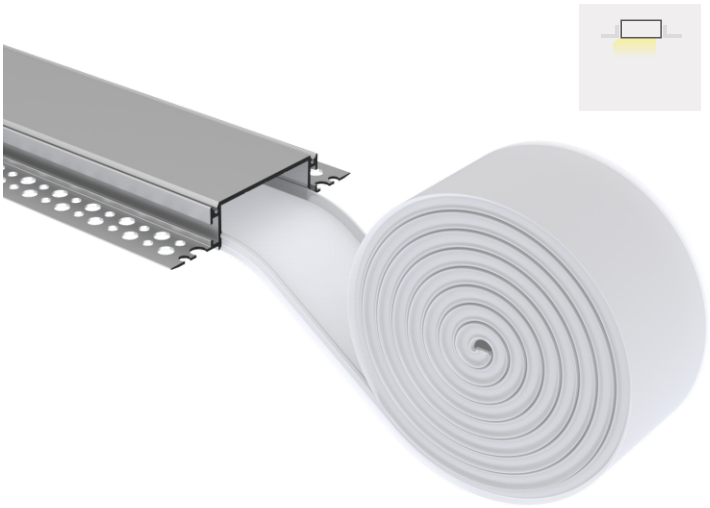

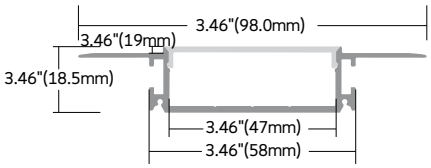

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Connector



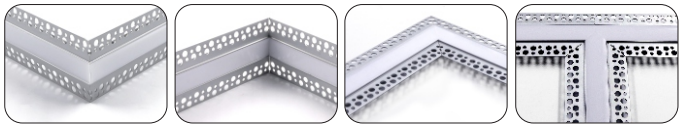

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

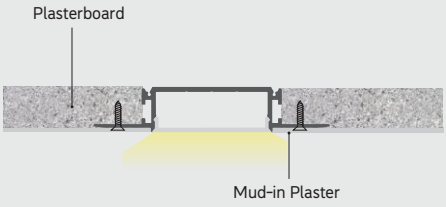

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

L306

Types of Installation:





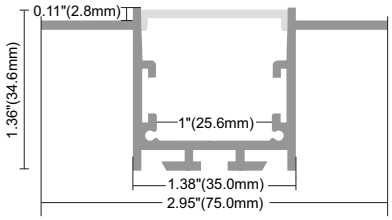

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2





90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

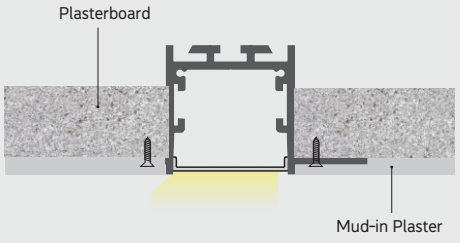

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

PL263

Plastenin Serfes

Types of Installation:



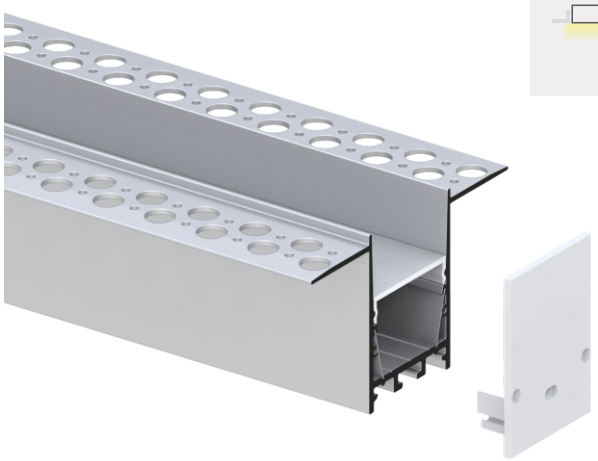

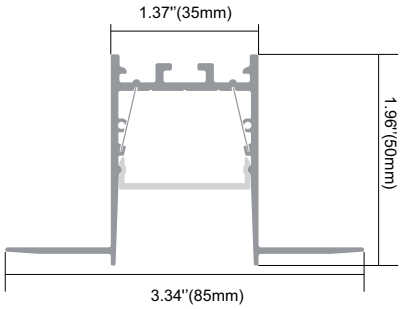

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2





90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

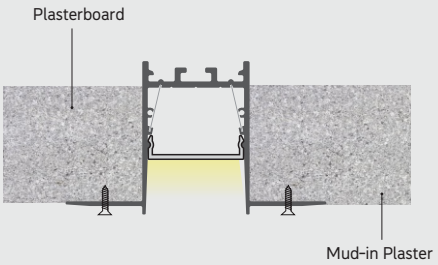

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

PL083

Plastenin Serfes

Types of Installation:



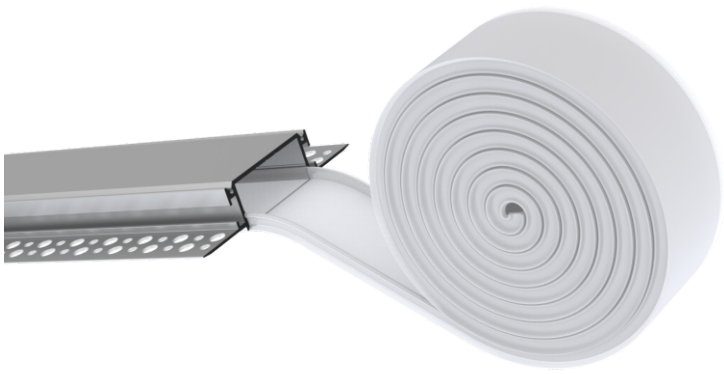

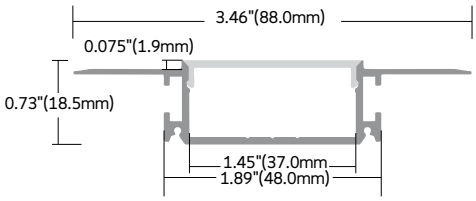

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Pre-embedded
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



End cap with hole × 2



Connector



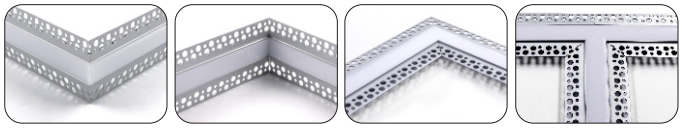

90° Outside connector | 90° Inside connector | L connector | T connector

Structure Image

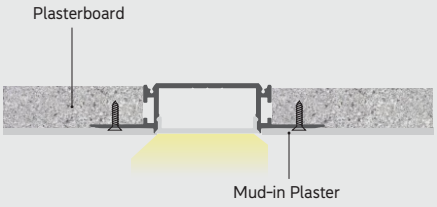

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Architectural Wall Washing Series

Application

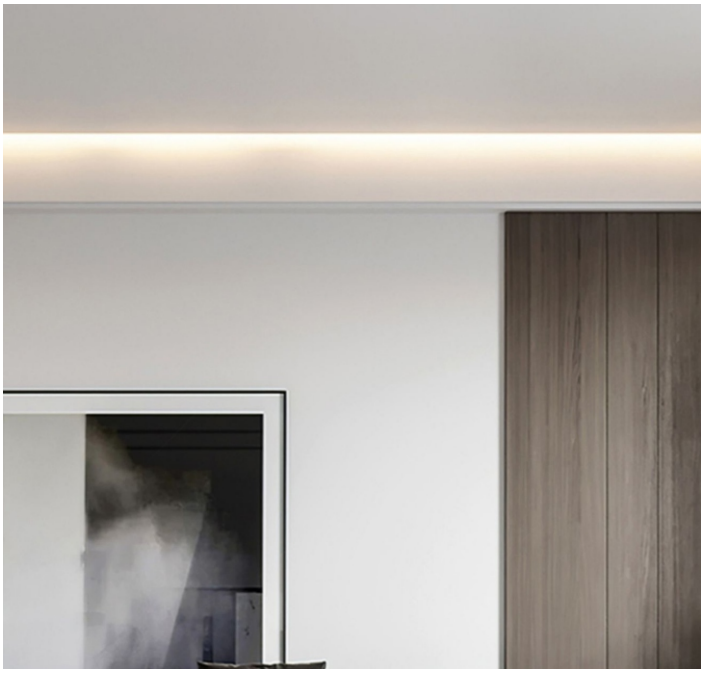

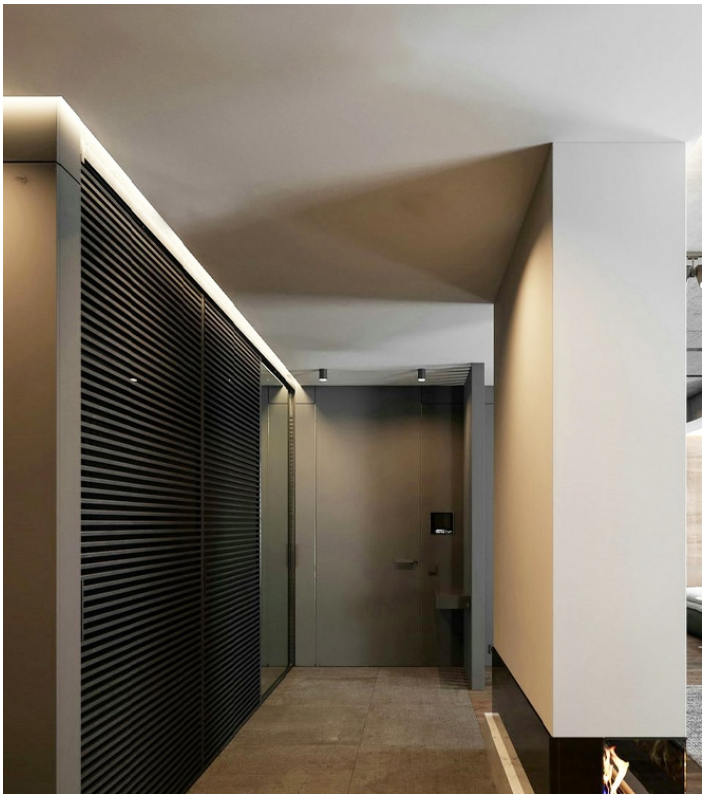







Types of Installation:



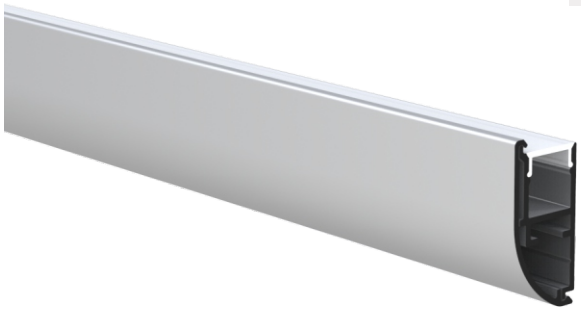



Profile color

Black

Silver

White

Profile Components



PC

opal matte /diffused/
Prismatic Frosted

MMA

P

opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap





90° vertical connector



90° horizontal connector



180° joining connector

Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



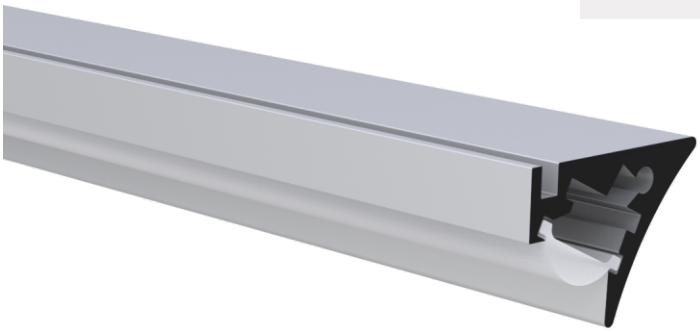

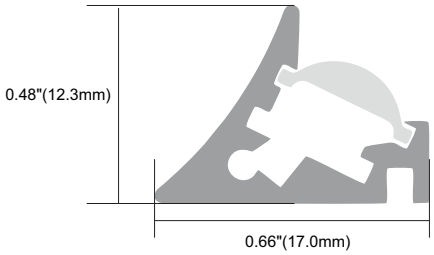

Profile color

- Black
- Silver
- White

Profile Components



Lens

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-224-5MM	224LEDs	24V	7W/m	700LM/m

Types of Installation:



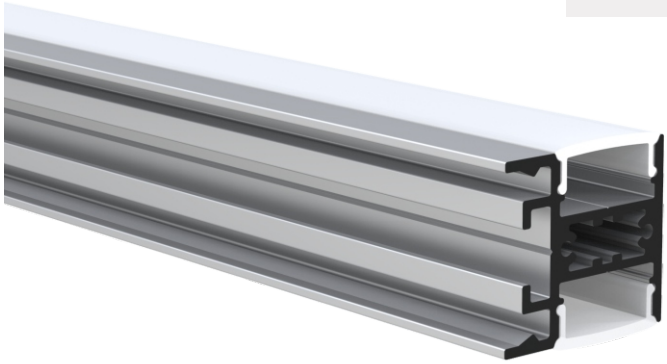



Profile color

- Black
- Silver
- White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



MMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



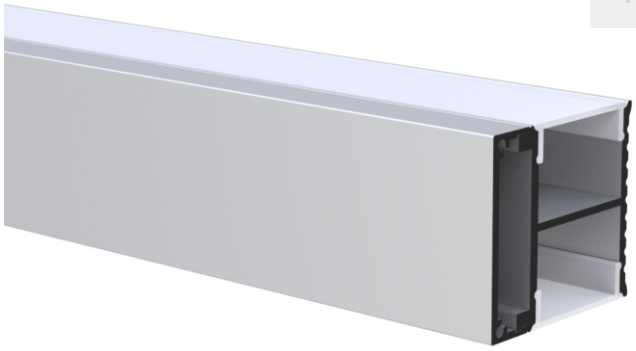

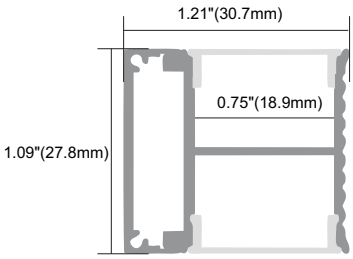

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image



Types of Installation:





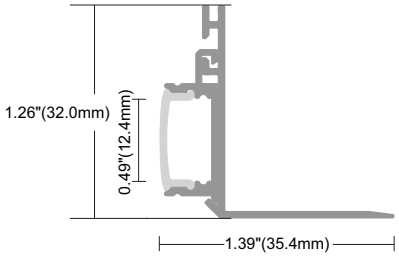

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

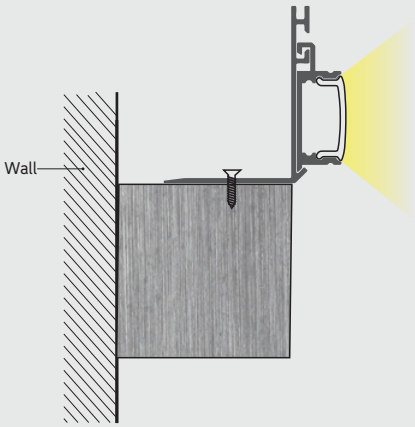

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





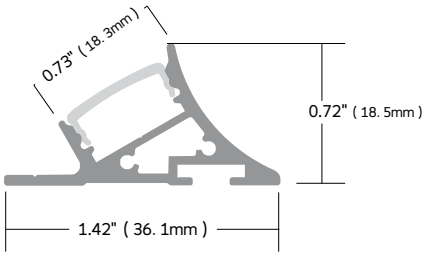

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear



MMA

opal matte /diffused/clear

Installation Accessories

End cap



Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





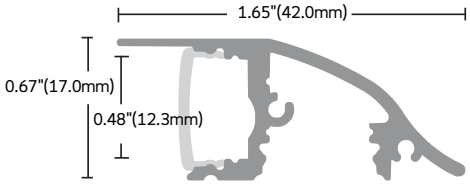

Profile color

- Black
- Silver
- White

Profile Components



PC
diffused/clear



MMA
P
opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

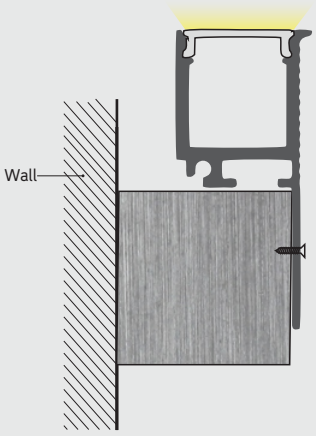

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



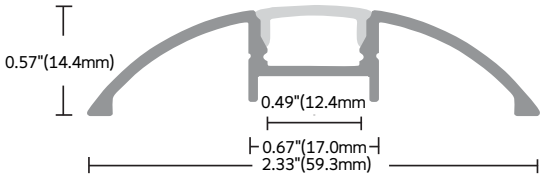

Profile color

Black

Silver

White

Profile Components



PC

opal matte /diffused/clear/ black/Prismatic Frosted



MMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image

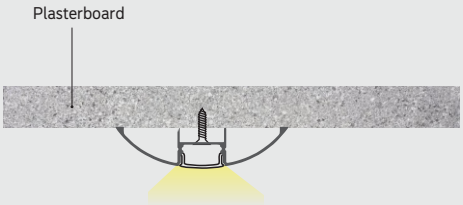

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:

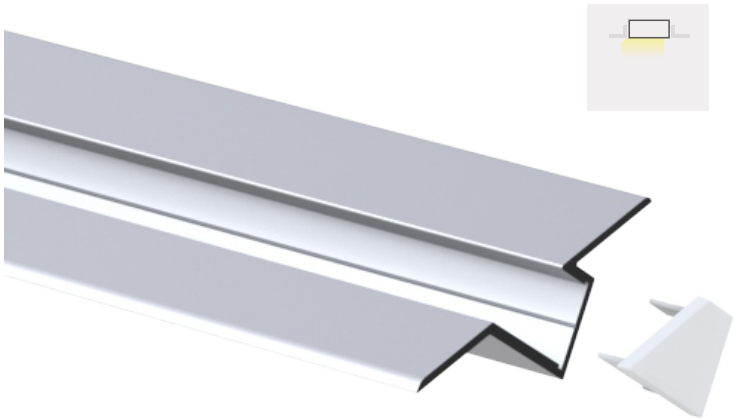

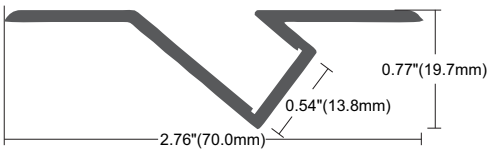

Black

Silver

White

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Structure Image

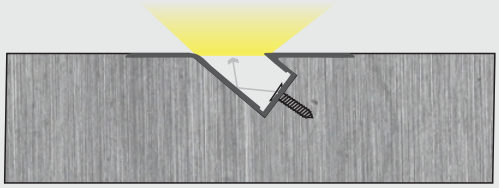



Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear



MMA

opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



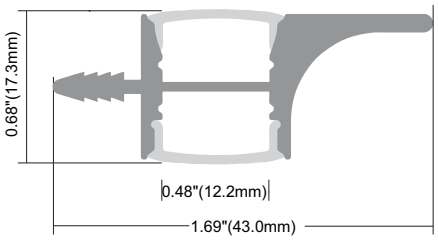

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

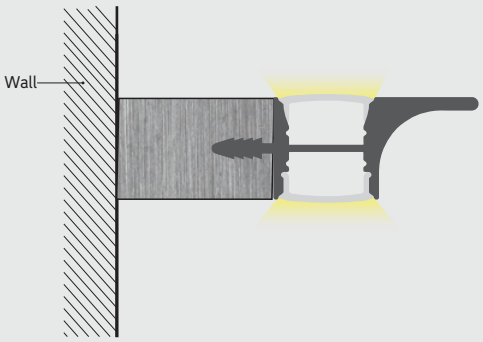

Effect Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



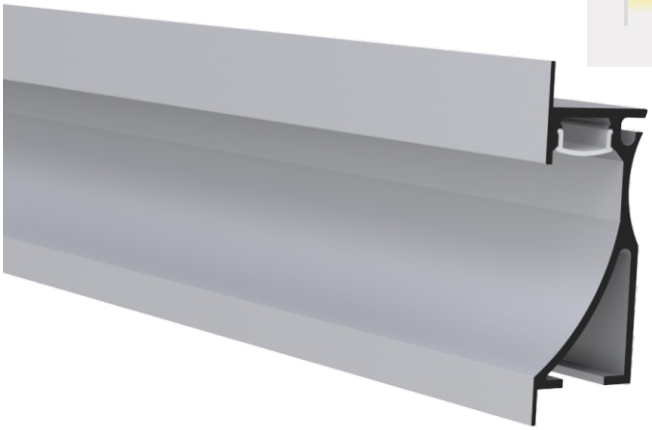



Profile color



Profile Components



PC
opal matte /diffused/clear



MMA
P
opal matte /diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

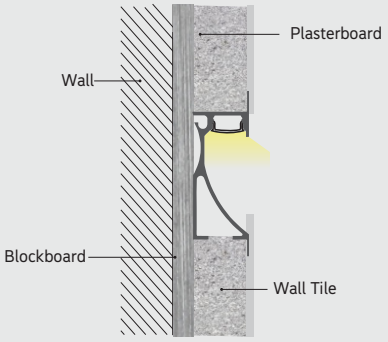

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:





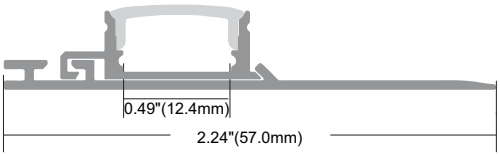

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

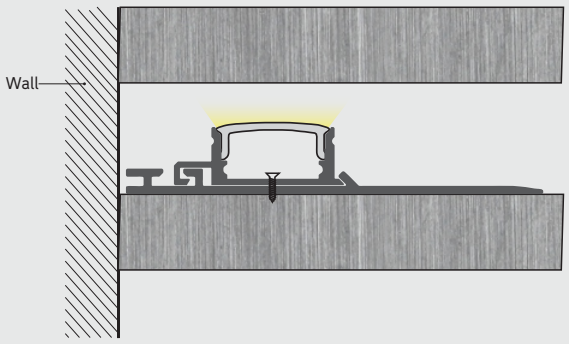

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



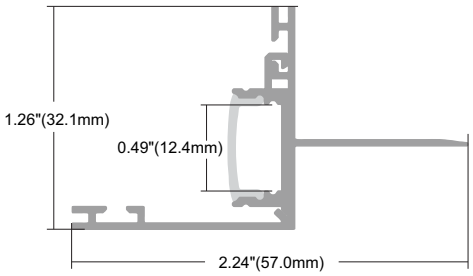

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

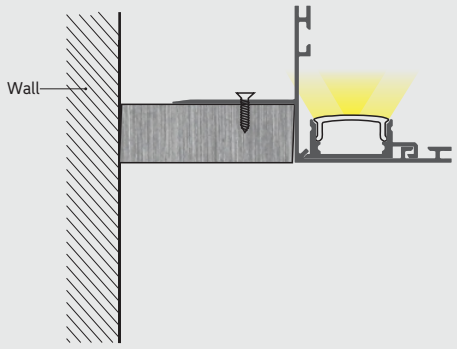

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



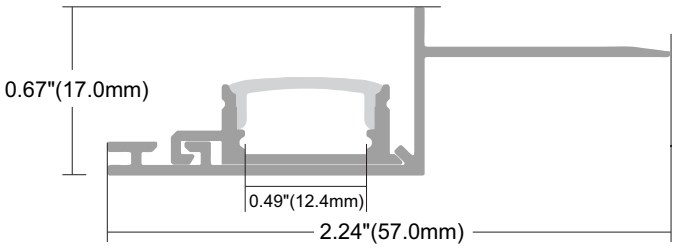

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

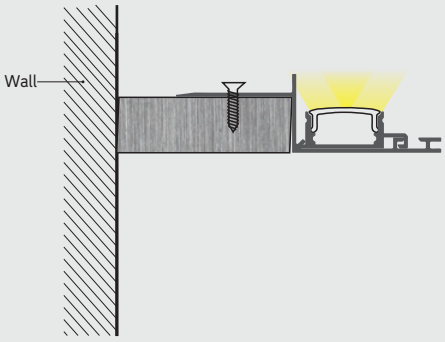

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



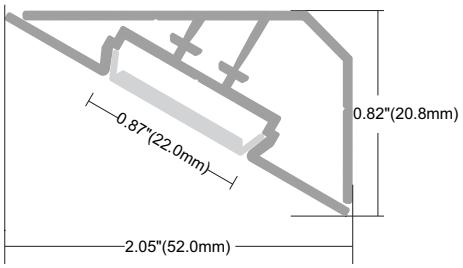

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image

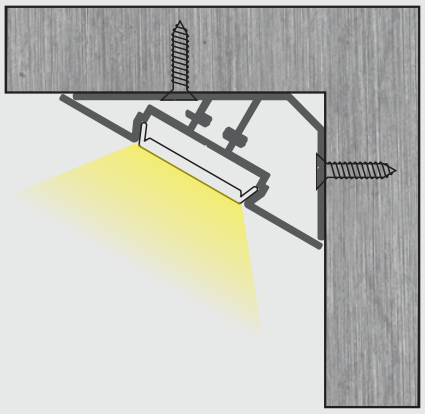

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:







Profile color



Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

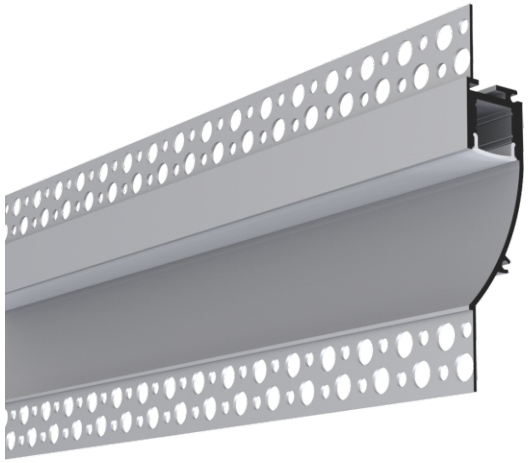

Types of Installation:



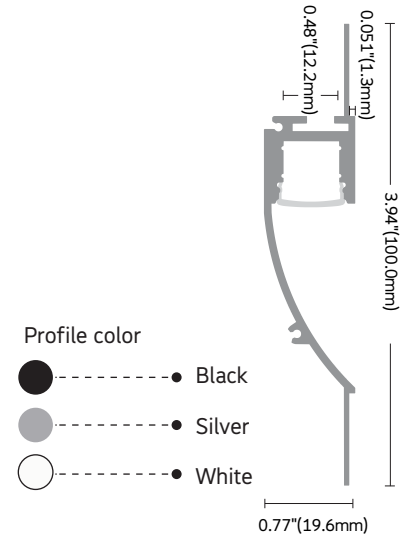

Profile Components



PC

clear/diffused/
opal matte /black



MMA

clear/semi-clear/
opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

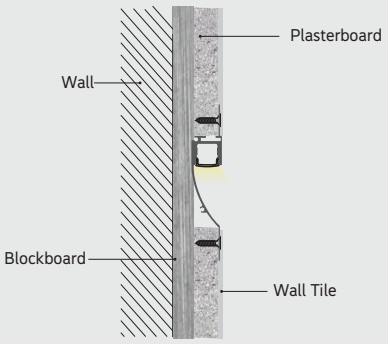

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



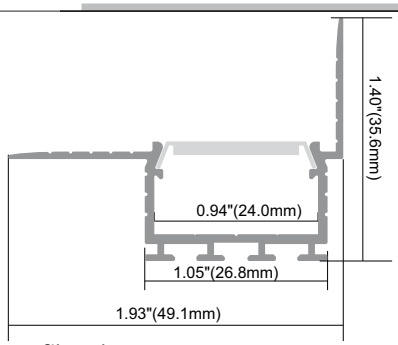

Profile color

- Black
- Silver
- White

Profile Components

PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

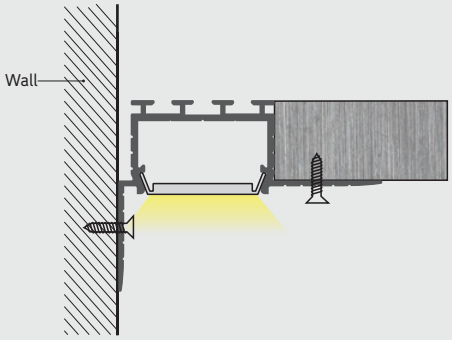

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

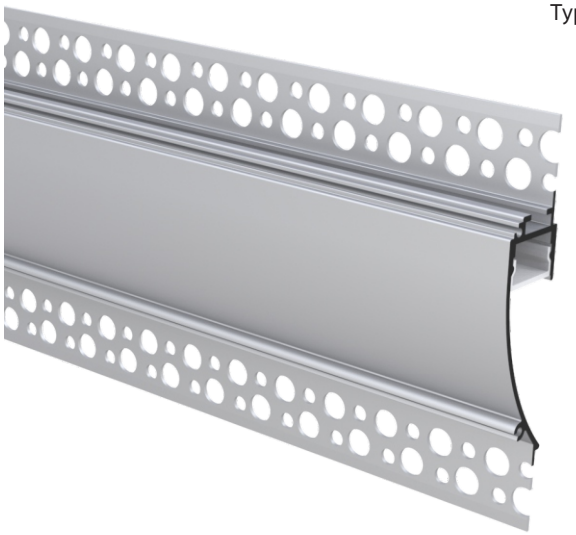

Types of Installation:





Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/Prismatic Frosted

MMA

P

opal matte

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

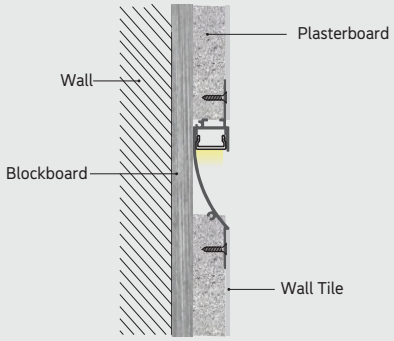

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





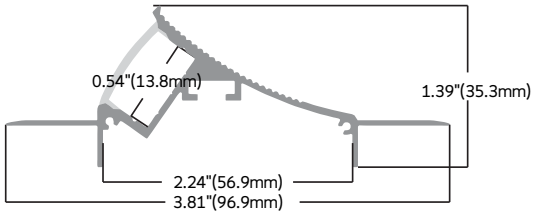

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/
Prismatic Frosted



MMA

P

opal matte /diffused/
clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

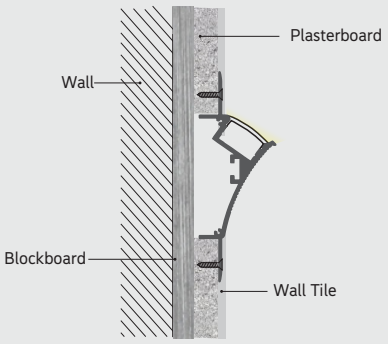

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:

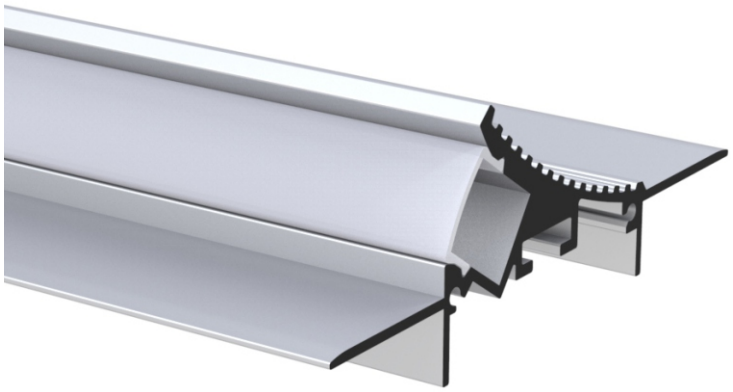

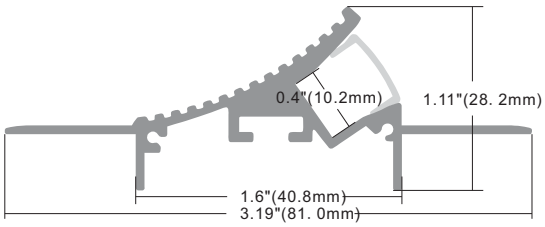

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

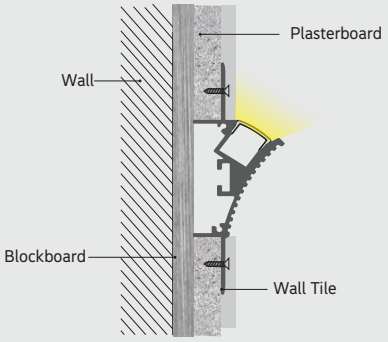

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



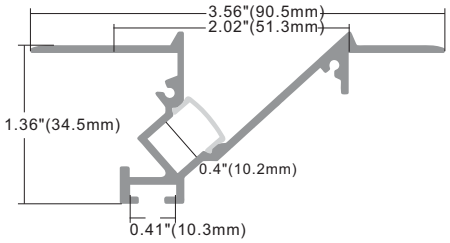

Profile color

Black

Silver

White

Profile Components



PC

diffused

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

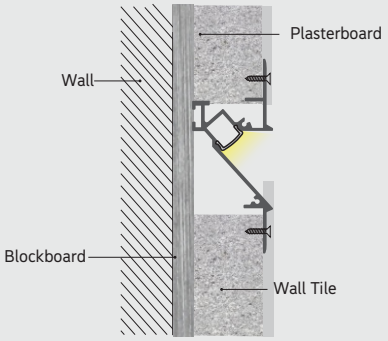

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m

Types of Installation:



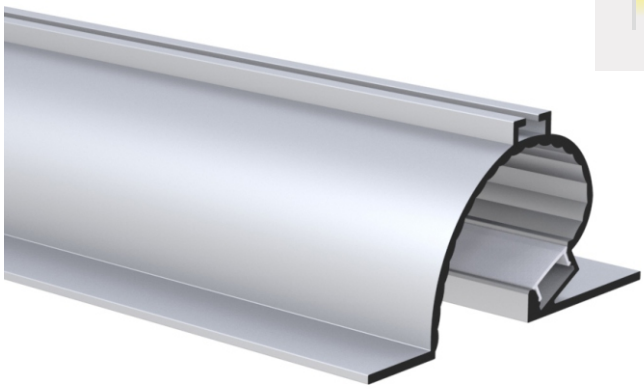

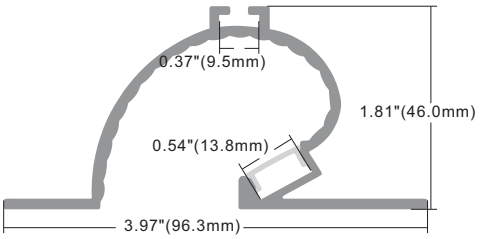

Profile color

- Black
- Silver
- White

Profile Components



PC

diffused/clear/
Prismatic Frosted



MMA

opal matte /diffused/
clear/black

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image

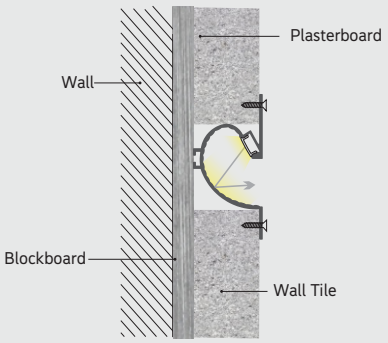

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installatlon:



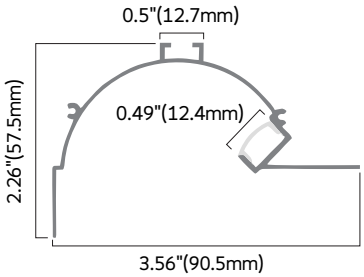

Profile color

- Black
- Sllver
- White

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mounted
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Profile Components

PC

diffused

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	240LEDs	12/24V	13W/m	1300LM/m

Structure Image

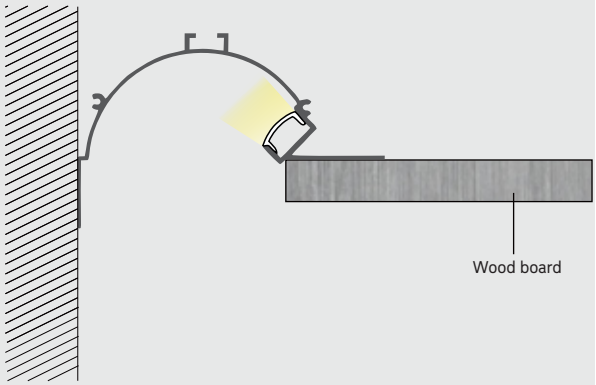

Installation Accessories

End cap × 2



Effect Image

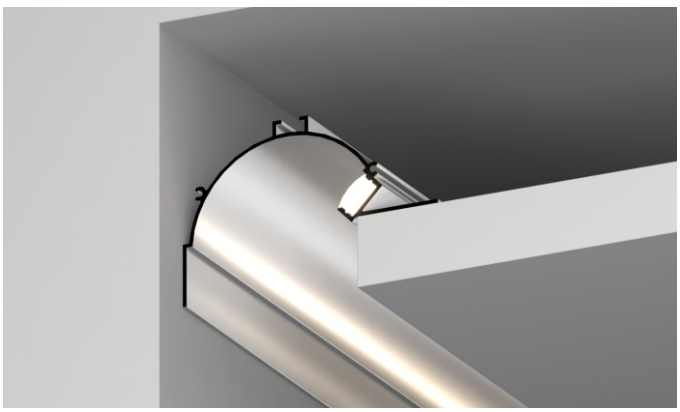

Types of Installatlon:



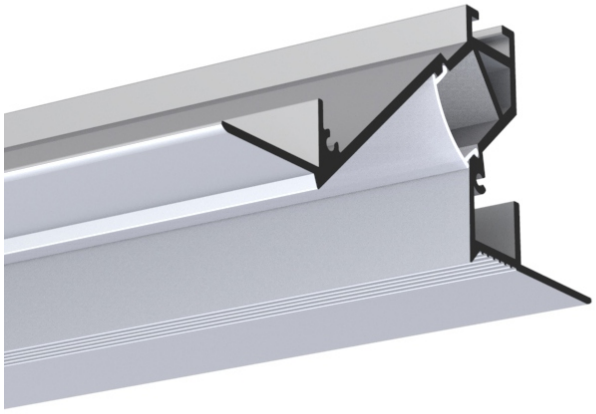

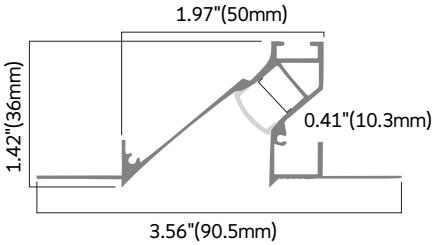

Profile color

- Black
- Sllver
- White

Profile Components

PC

diffused

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	240LEDs	12/24V	13W/m	1300LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mounted
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

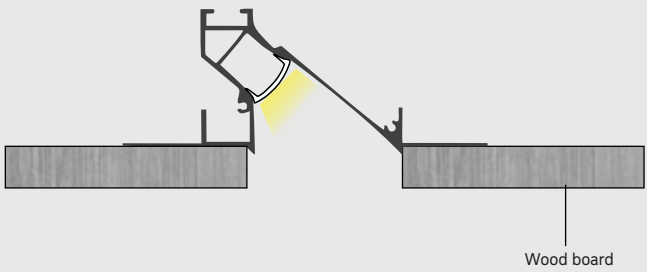

Effect Image

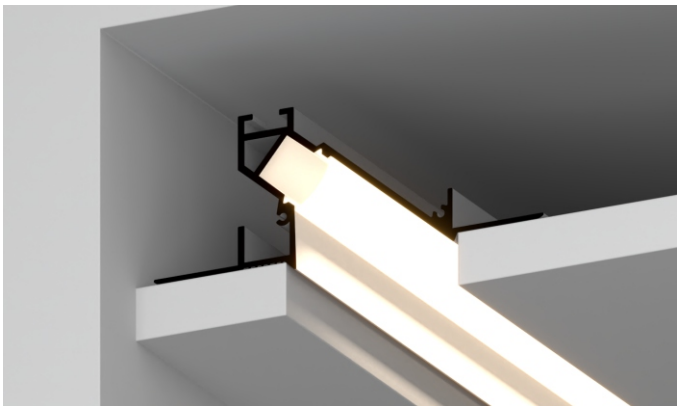

Types of Installation:







Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

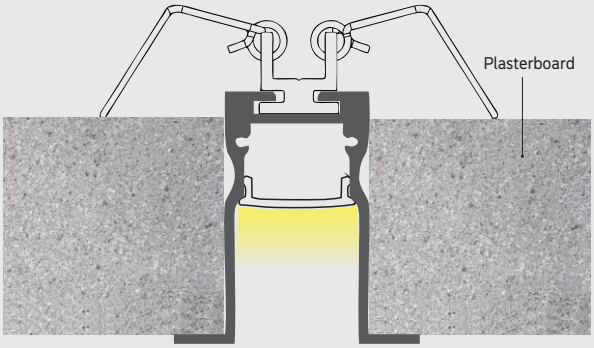

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



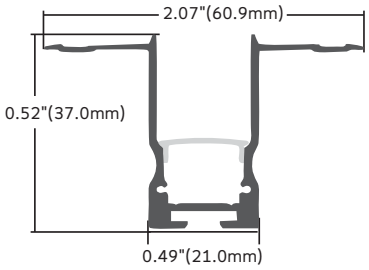

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Structure Image

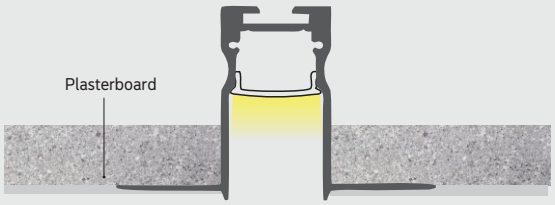

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:





Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

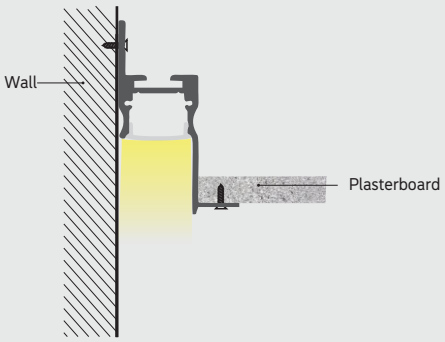

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installation:



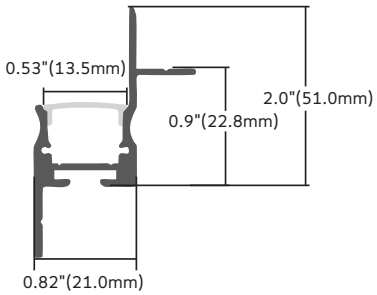

Profile color

Black

Silver

White

Profile Components



PC

diffused/clear

Basic Parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,Black,White
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Structure Image

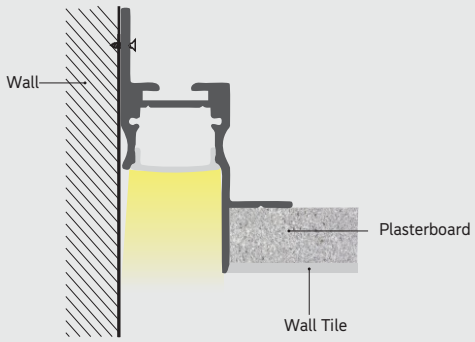

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	120LEDs	12V/24V	13W/m	1300LM/m
BW2835-182-10MM	182LEDs	24V	15W/m	1800LM/m

Types of Installatlon:



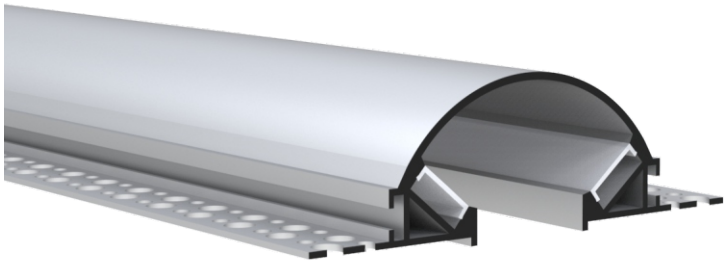

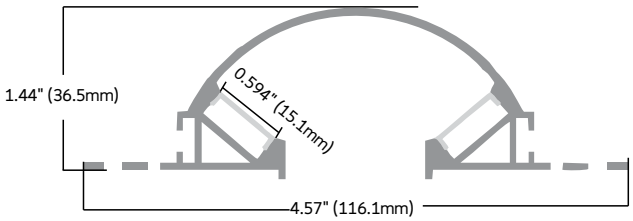

Profile color

- Black
- Sllver
- White

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Profile Components

PC

diffused

Installation Accessories

End cap



Structure Image

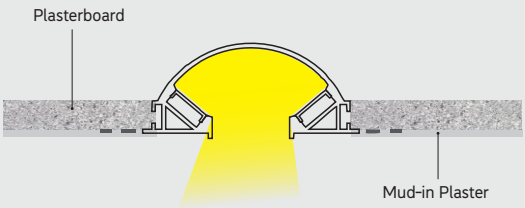

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

Effect Image

Types of Installatlon:





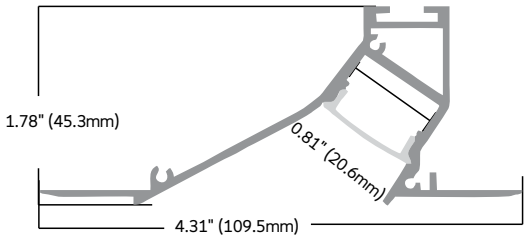

Profile color

- Black
- Sllver
- White

Profile Components



PC

diffused

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap × 2



Structure Image

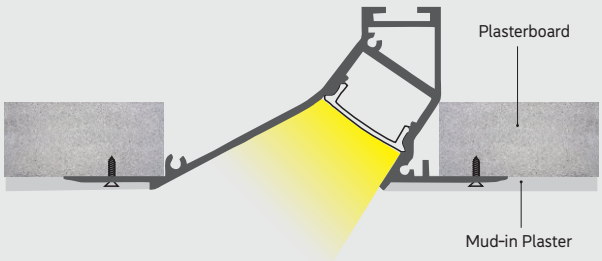

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

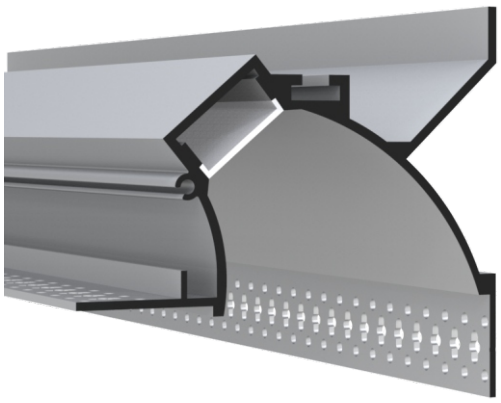

Types of Installatlon:



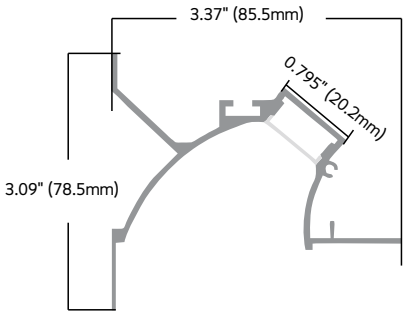

Profile color

Black

Sllver

White

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Recessed Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Profile Components

PC

diffused

Structure Image

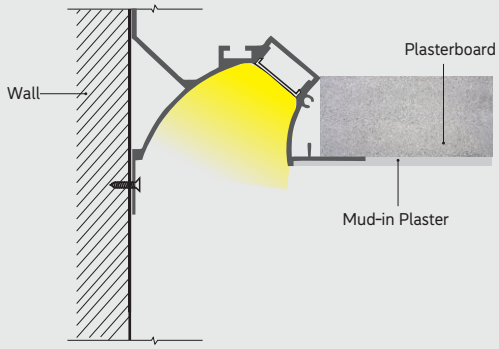

Installation Accessories

End cap × 2



Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-240-15MM	240LEDs	24V	20W/m	2085LM/m

Types of Installatlon:





Profile color

- Black
- Sllver
- White

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mounted
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Profile Components

PC

diffused

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	240LEDs	12/24V	13W/m	1300LM/m

Structure Image

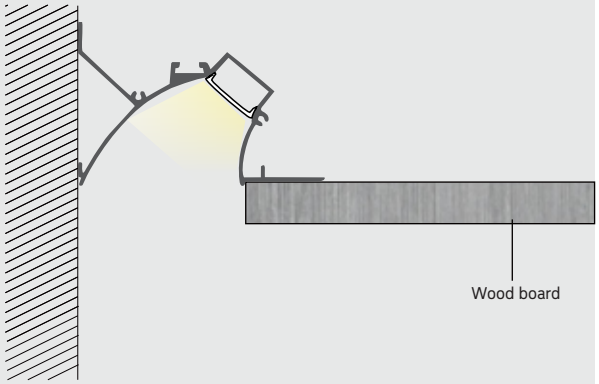

Installation Accessories

End cap × 2



Effect Image

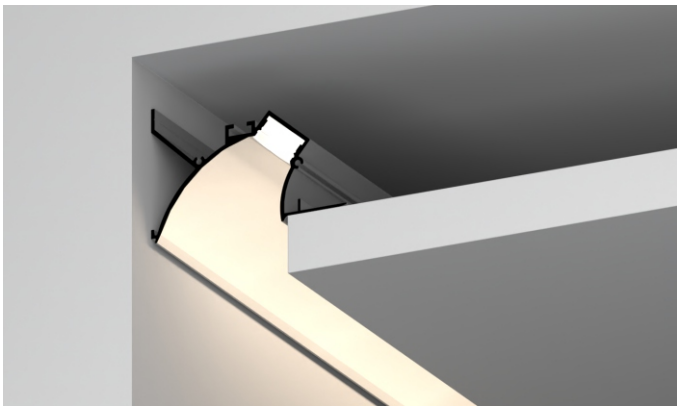

Types of Installatlon:



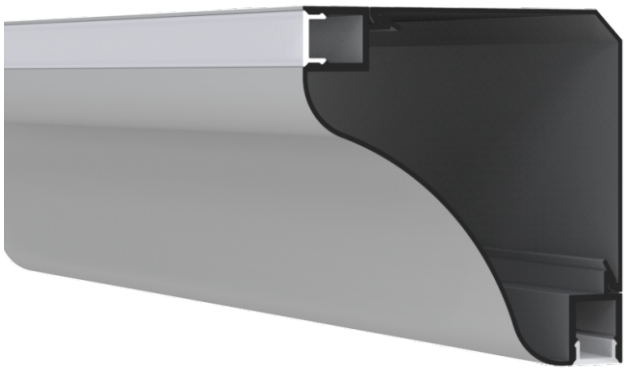



Profile color

Black

Sllver

White

Profile Components



PC

diffused

Light Source

Model No	LEDs/meter	Voltage	Power	Lumen
BW2835-120-8MM	240LEDs	12/24V	13W/m	1300LM/m

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Surface Mounted
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

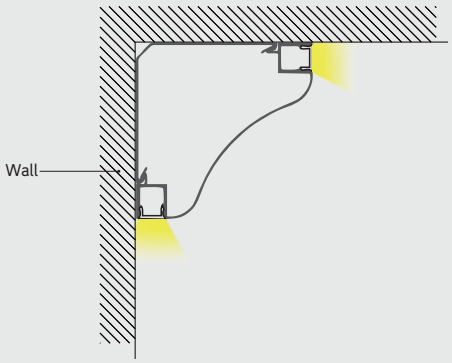

Effect Image







end caps



Metallic mounting clips

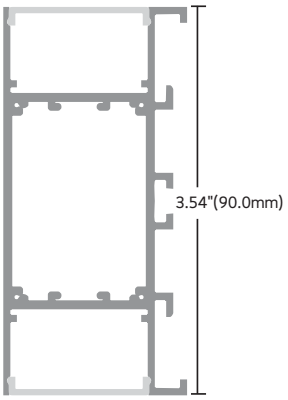



Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear



Suspending and Surface Series

Application



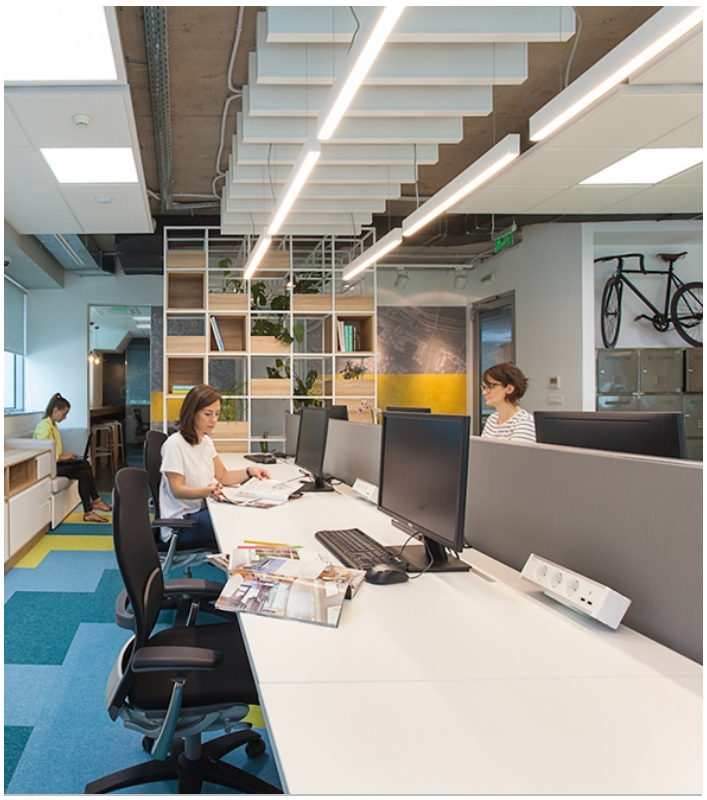

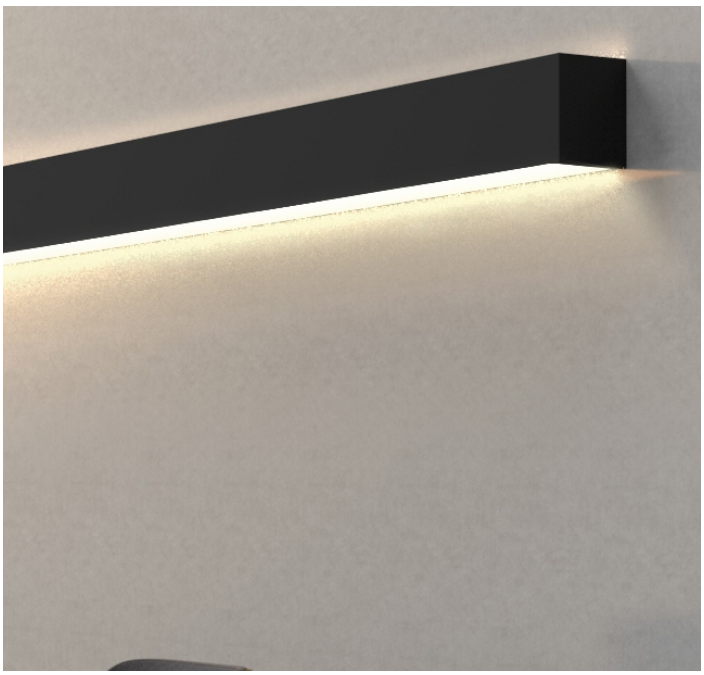





PL245





End Caps



Suspension wire

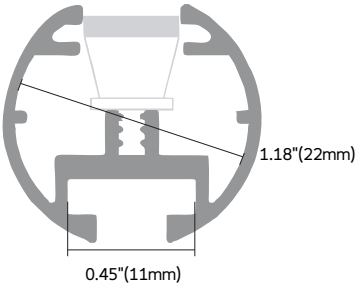

Silver Black White



·Installation method

PL246





End Caps

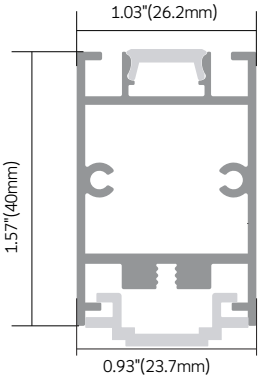

Silver Black White



·Installation method

L295

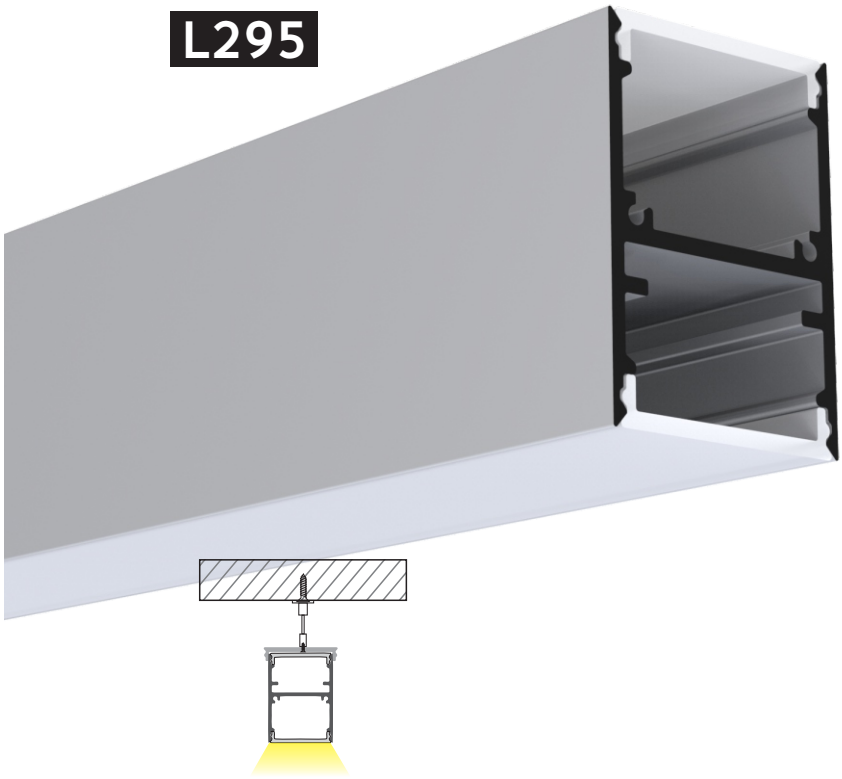



End Caps



Metallic mounting clips



Suspension wire

Cover: PC/Clear/Milky





Silver Black White

·Installation method

L723

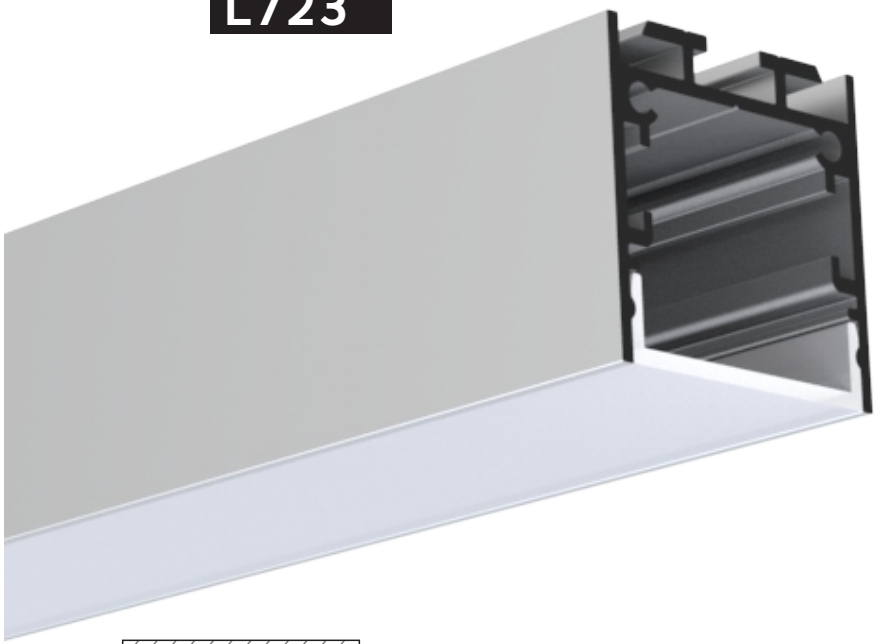



End Caps

Cover: PC/Clear/Milky





·Installation method

PL076



End Caps



Cover: PC/Clear/Milky



Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear



L244

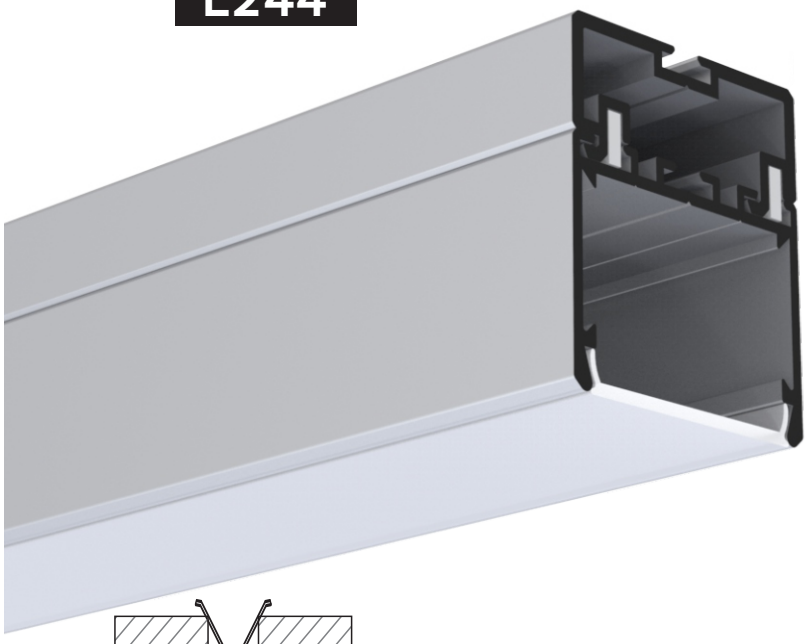



Mounting clips



End Caps

Cover: PC/Clear/Milky



Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

L099

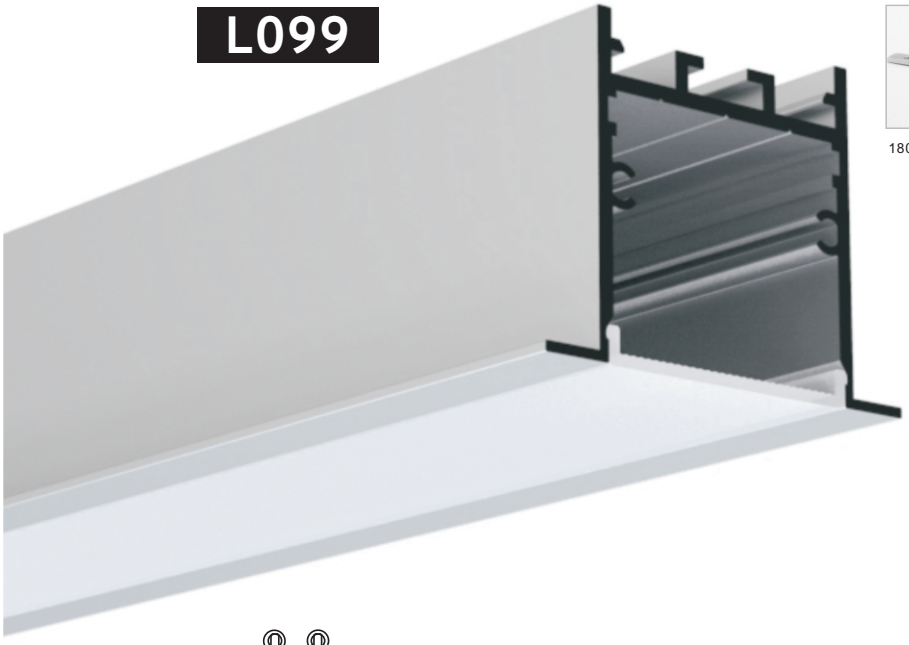



180° joining connector



End Caps



Mounting clips

Cover: PC/Clear/Milky

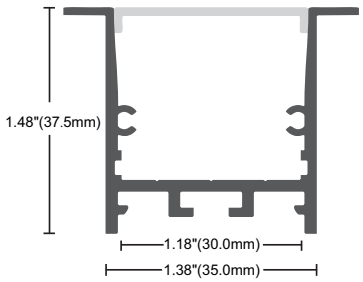

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL005


End Caps


Suspension wire


90° joining connector


180° joining connector

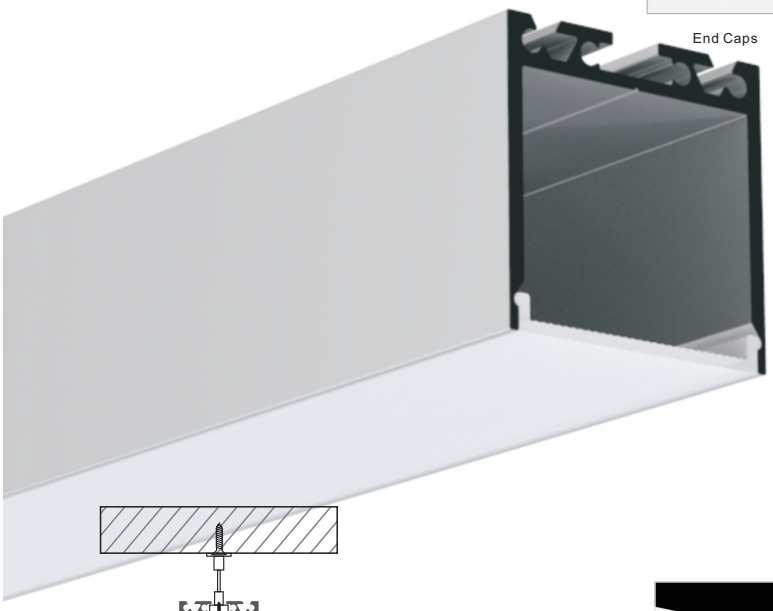


·Installation method

Cover: PC/Clear/Milky

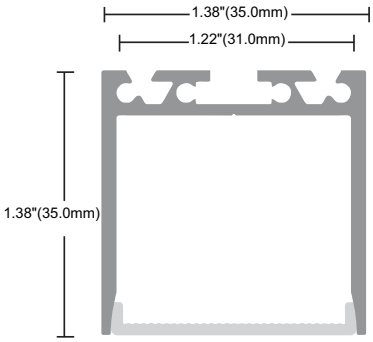

Silver Black White


PMMA Opal


PC Milky


PC Frosted


PC Clear

Sort by Product width

PL074

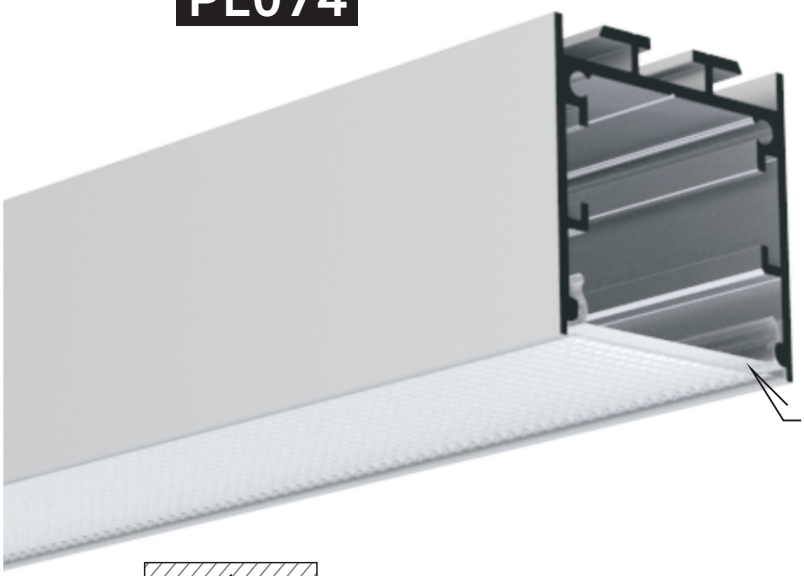


·Installation method


End Caps


Metallic mounting clips


Suspension wire

Cover: PMMA

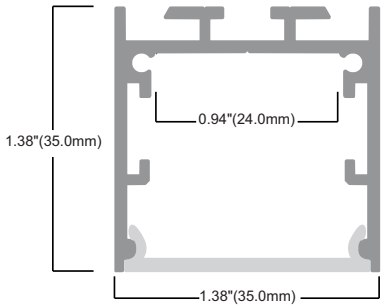

Silver Black White


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL088

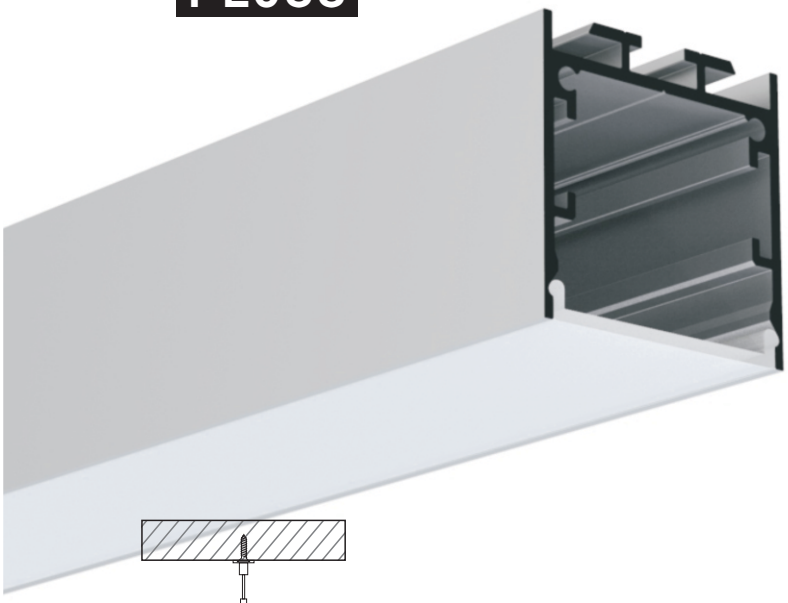



End Caps



Metallic mounting clips



Suspension wire

Cover: PC/Clear/Milky



Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

L098



End Caps



Metallic mounting clips



180° oining connector



90° joining connector



Suspension wire

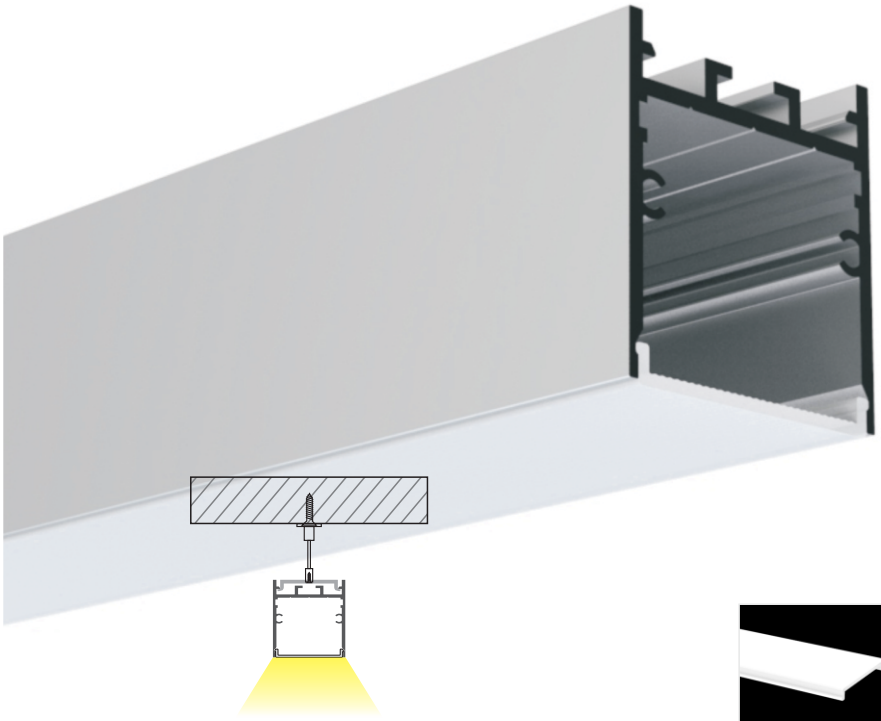

Cover: PC/Clear/Milky



Silver Black White

·Installation method

PMMA Opal



PC Milky



PC Frosted



PC Clear

PL266

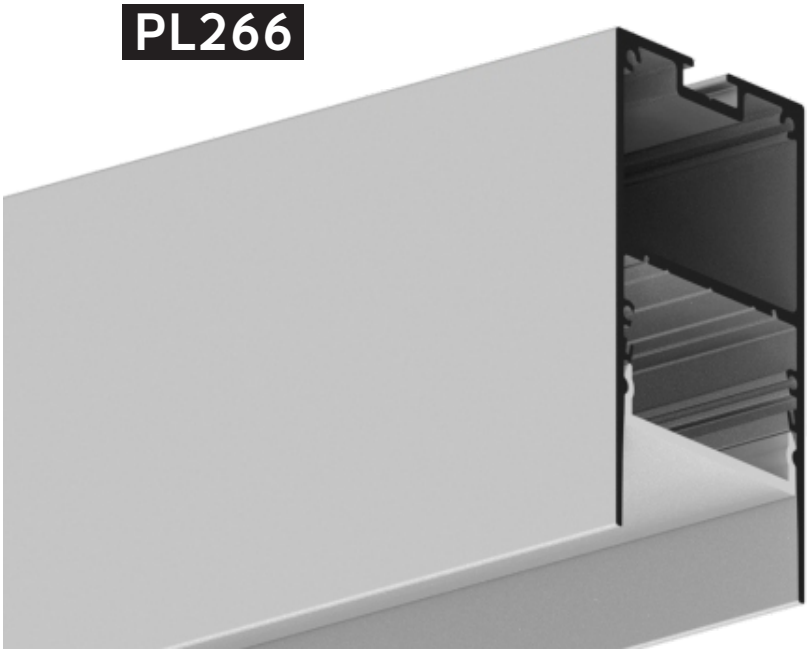



Metallic mounting clips



Suspension wire

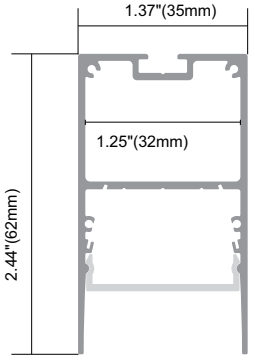



·Installation method



PL066





End Caps

Cover: PC/Clear/Milky

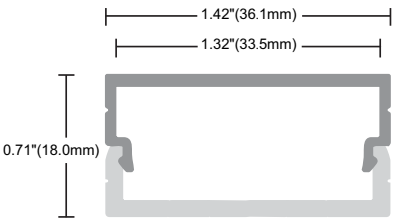



Silver Black White



·Installation method

PL194

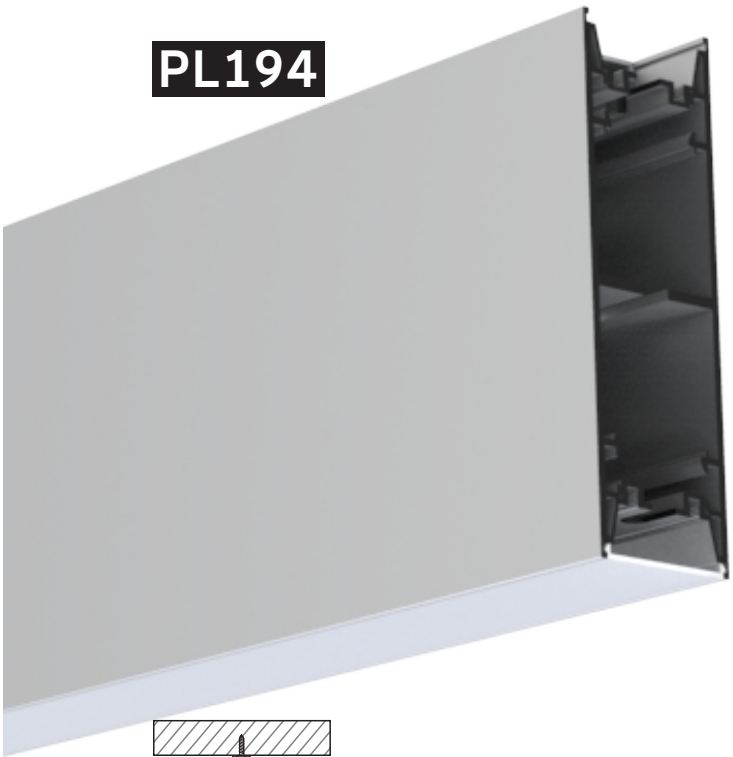



End Caps



Metallic mounting clips



Safety cord



Suspension wire

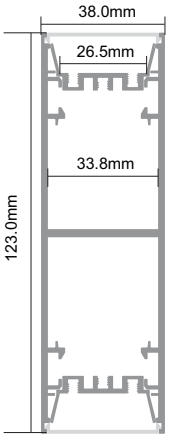



·Installation method

PL250

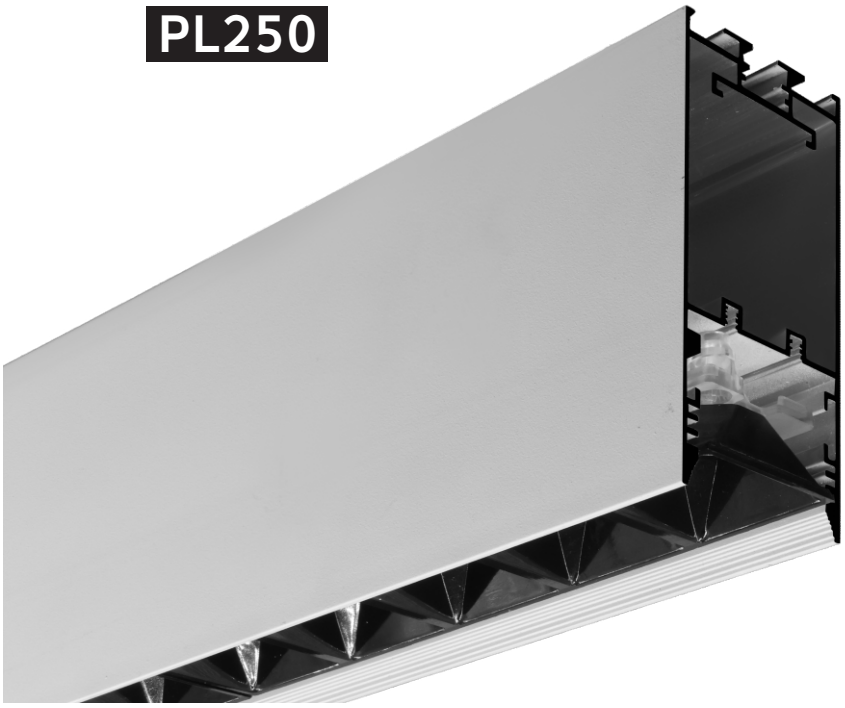



Metallic mounting clips



Suspension wire

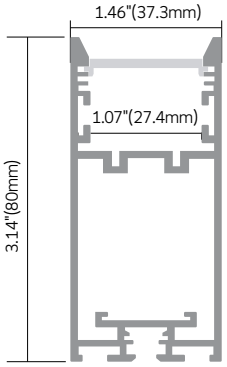



·Installation method

PL247

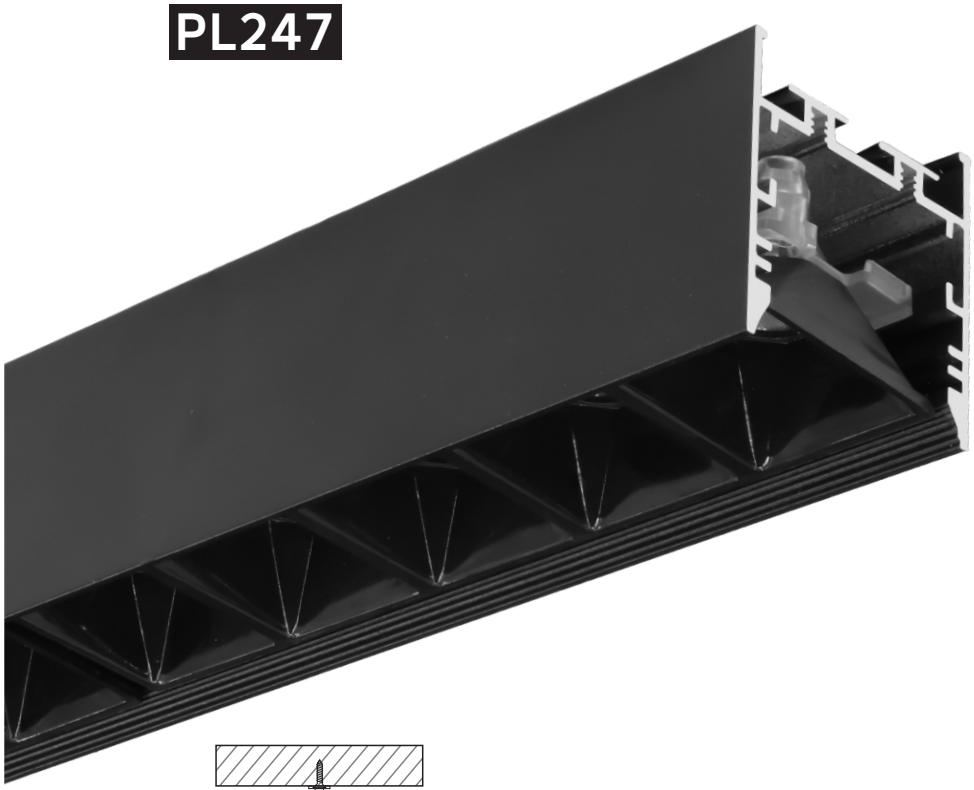



Metallic mounting clips



Suspension wire

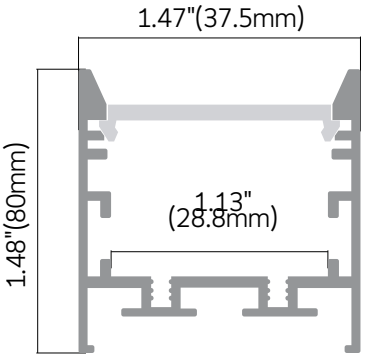



·Installation method

PL186

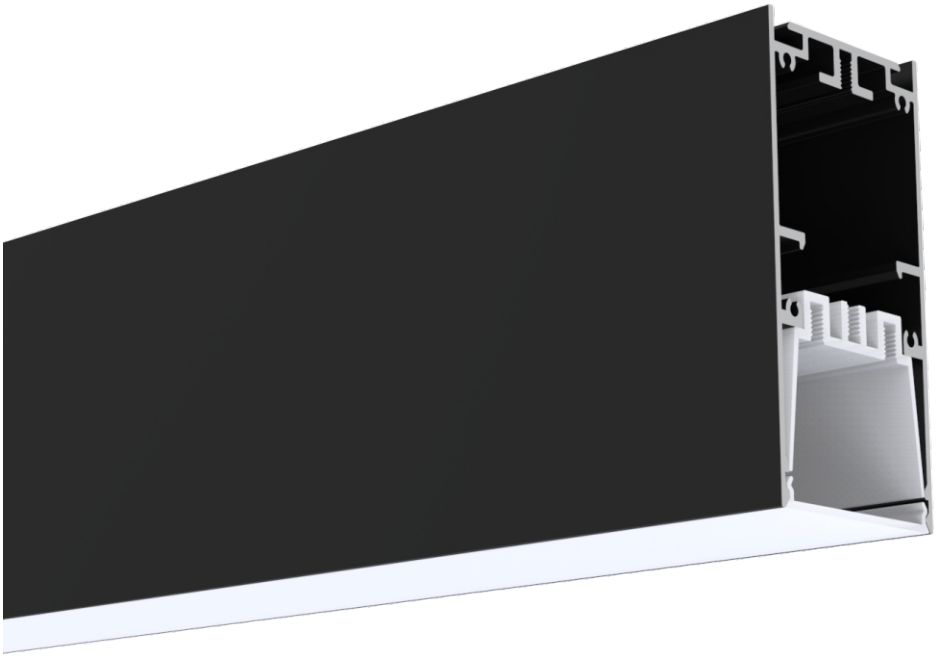

Cover: PC/PMMA/Clear/Milky





·Installation method



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



Connector V



Connector L



Connector T



Connector X

PL187

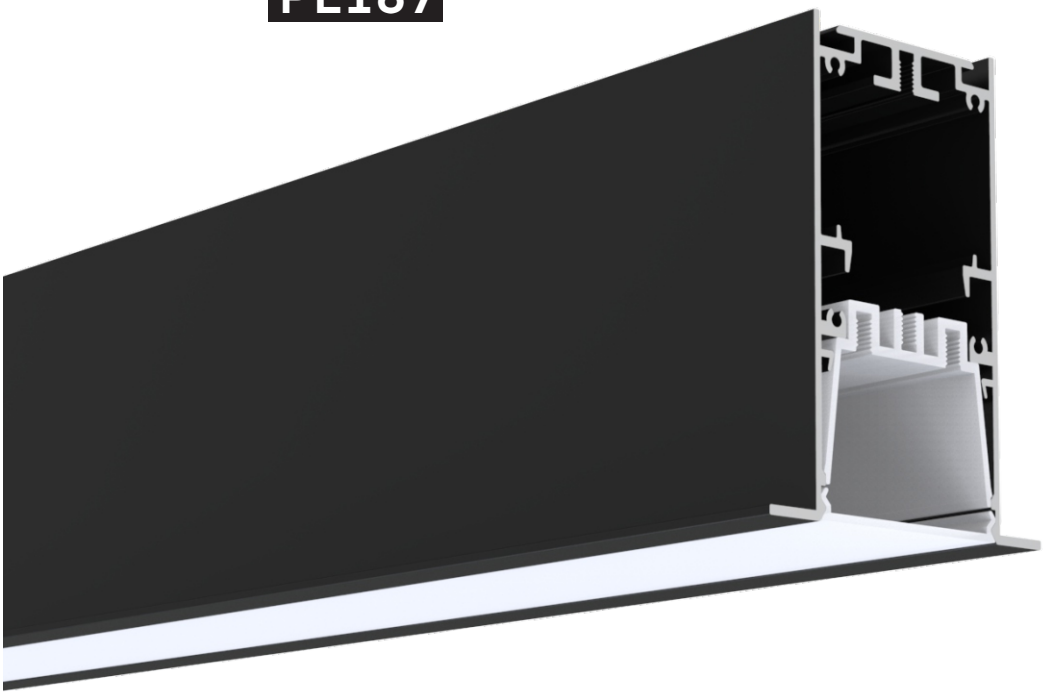

Cover: PC/PMMA/Clear/Milky



Silver Black White



·Installation method



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips

PL063


End Caps


Metallic mounting clips


Suspension wire

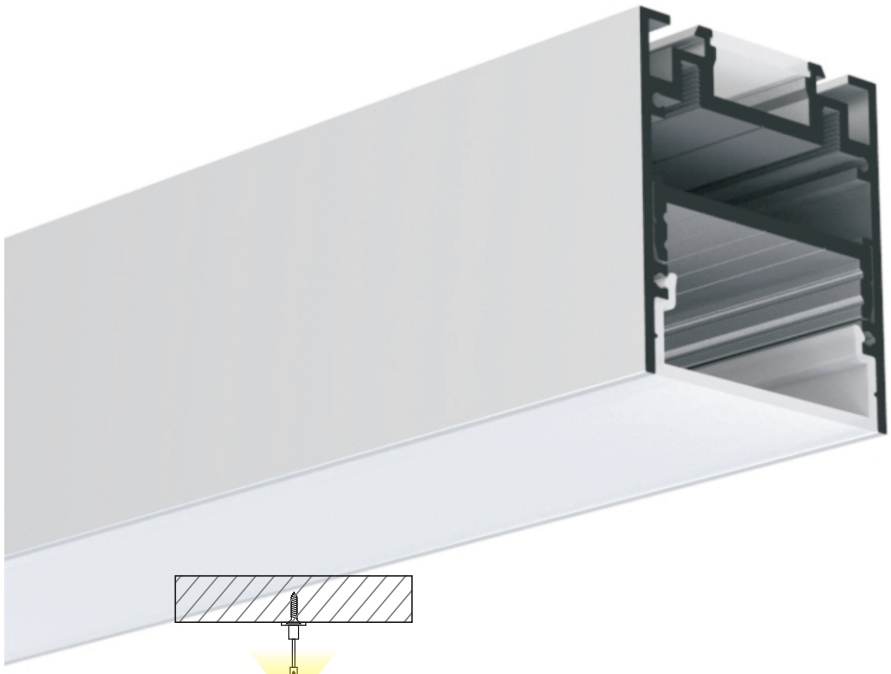


·Installation method

Cover: PC/Clear/Milky



Silver Black White



PL063A



PL063B



PL063C



PL063D



PL063E



PL063F

Sort by Product width

PL064

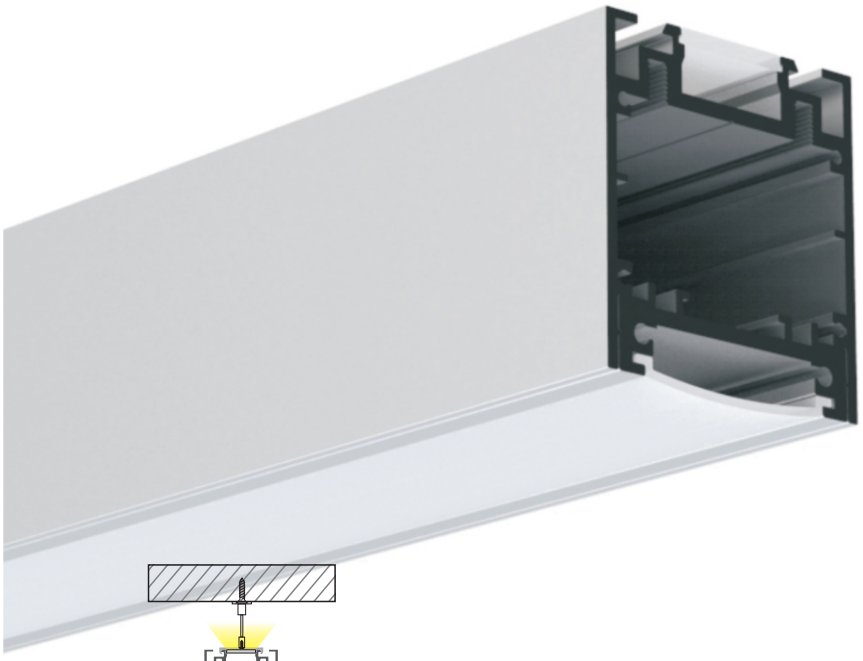



End Caps



Metallic mounting clips



Suspension wire

Cover: PC/Clear/Milky

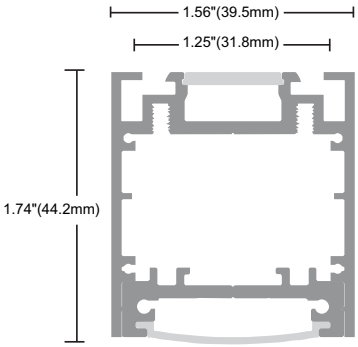

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL065

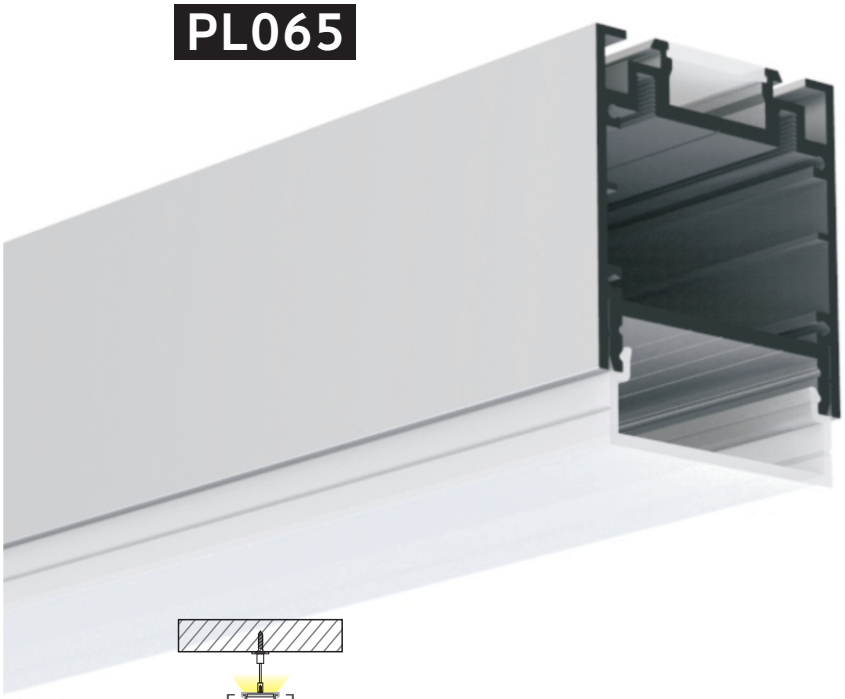



End Caps



Metallic mounting clips



Suspension wire

Cover: PC/Clear/Milky

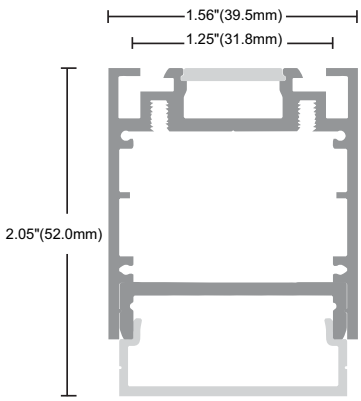

Silver Black White



·Installation method

Sort by Product width

PL056

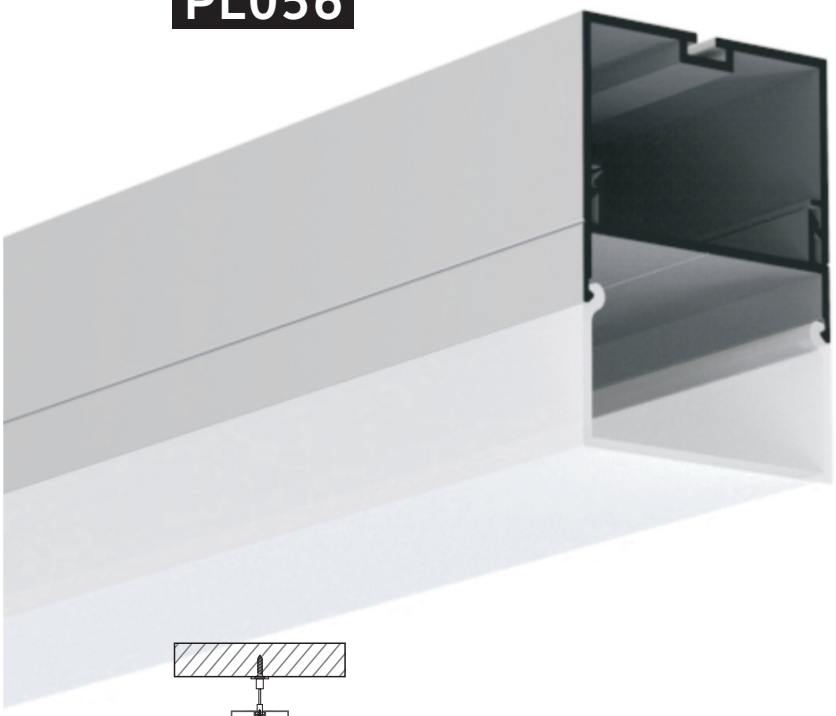



End Caps



Suspension wire

Cover: PC/Clear/Milky

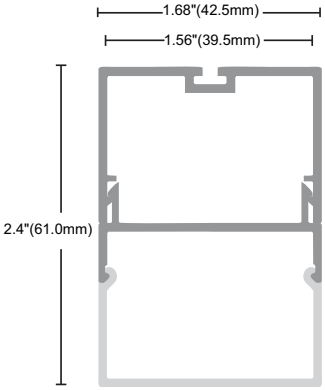

Silver Black White



·Installation method

PL168

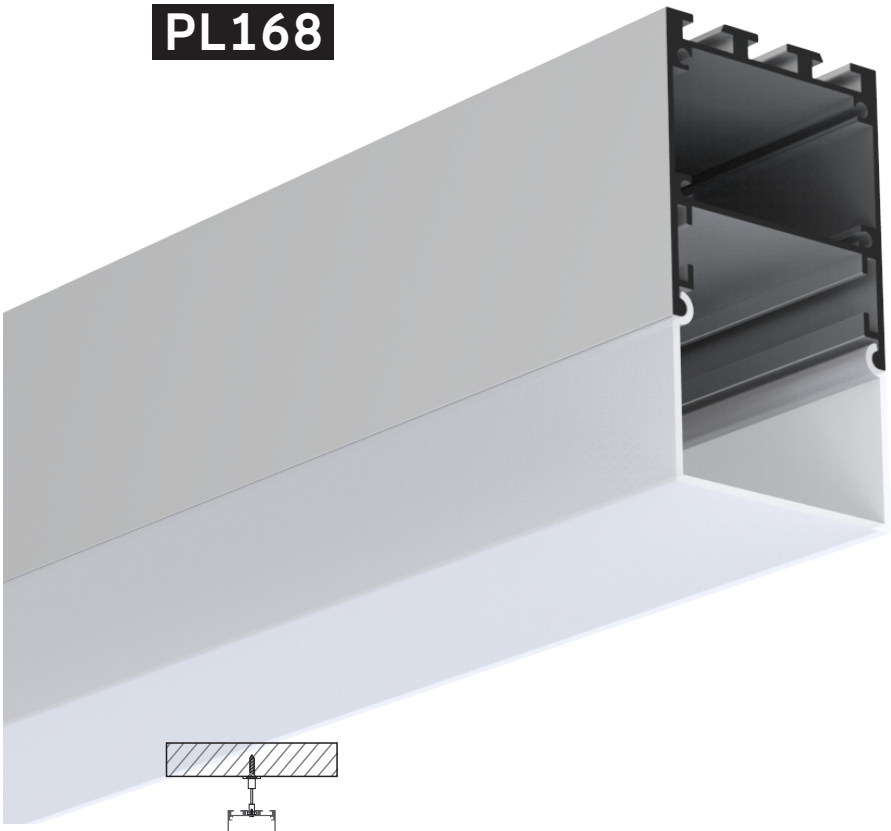



End Caps

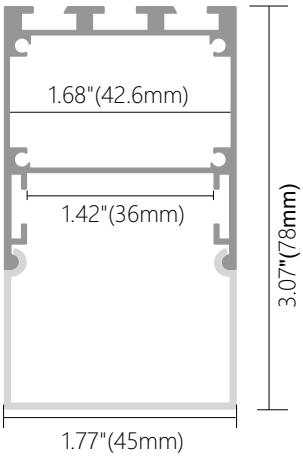



·Installation method

PL248

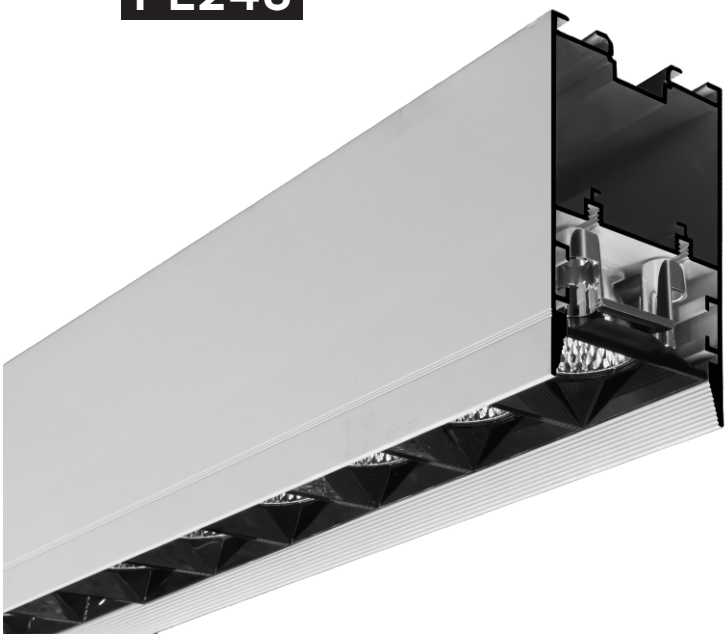





End Caps



Suspension wire

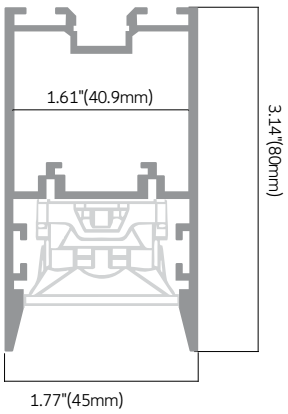

PL249

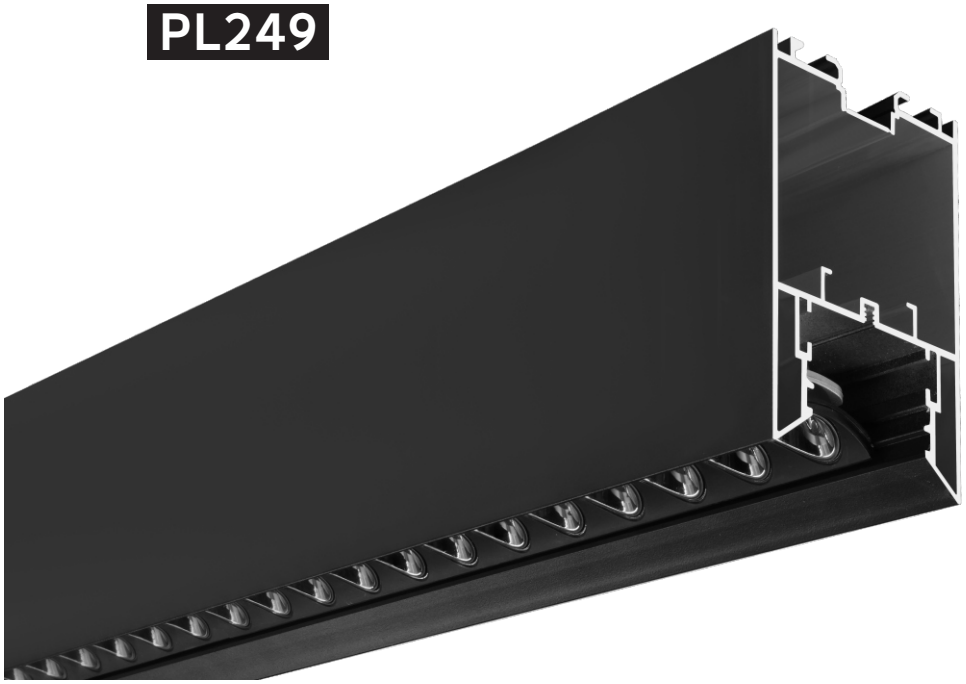





End Caps



Suspension wire

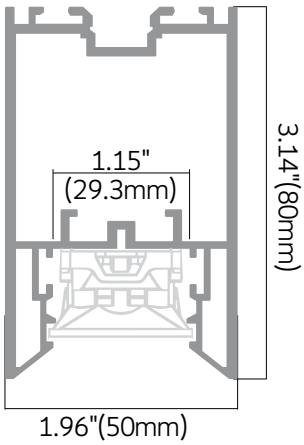

PL002


End Caps


Suspension wire


180° joining connector


90° joining connector

Cover: PC/Clear/Milky

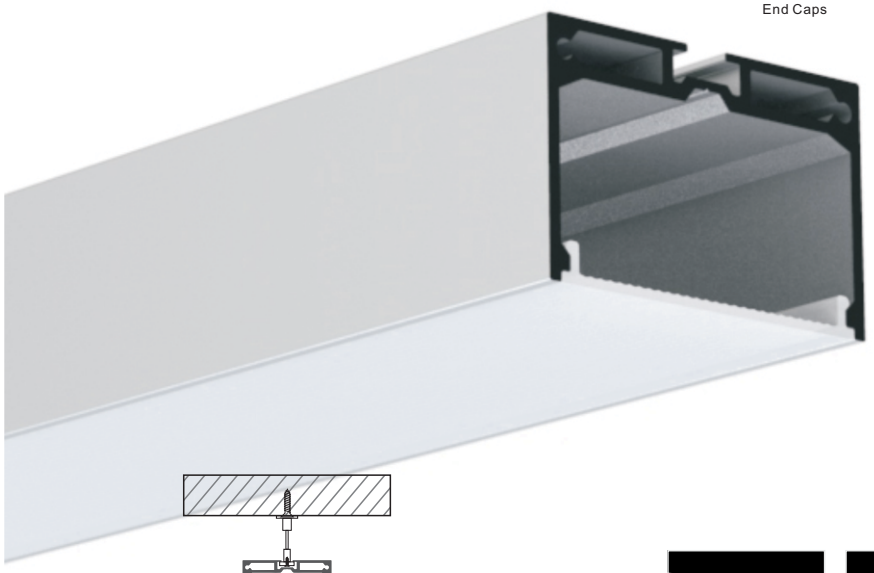

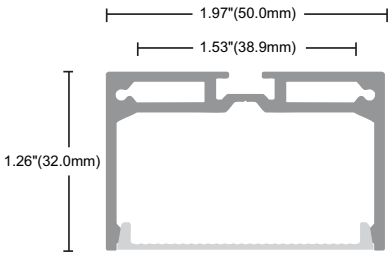

Silver Black White

·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL075


End Caps


Metallic mounting clips


Suspension wire

Cover: PC/Clear/Milky

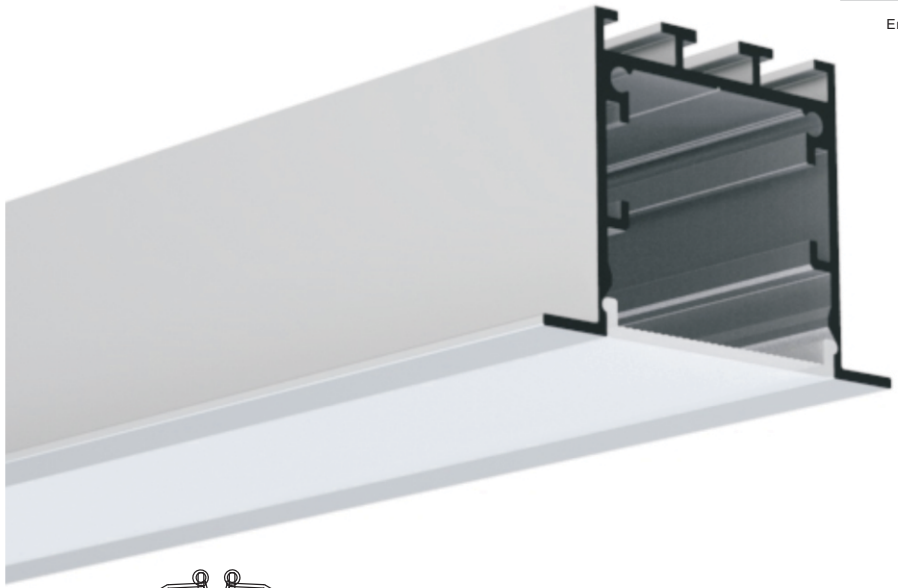

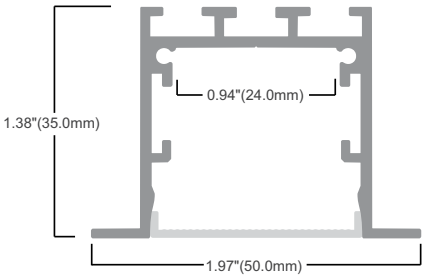

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

Sort by Product width

PL103


End Caps


Metallic mounting clips


Suspension wire

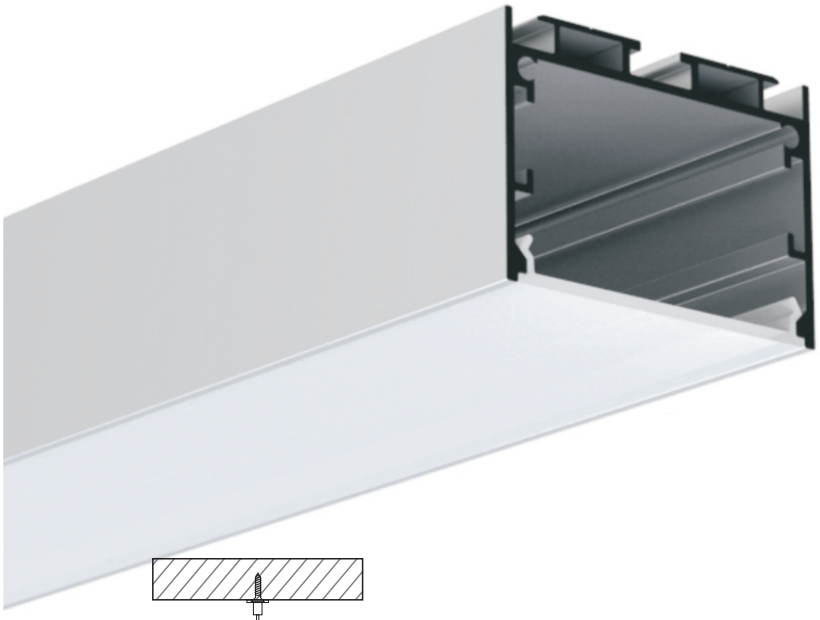


·Installation method

Cover: PC/Clear/Milky

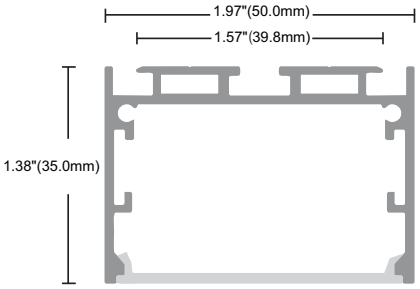

Silver Black White

PL104


End Caps


Mounting clips

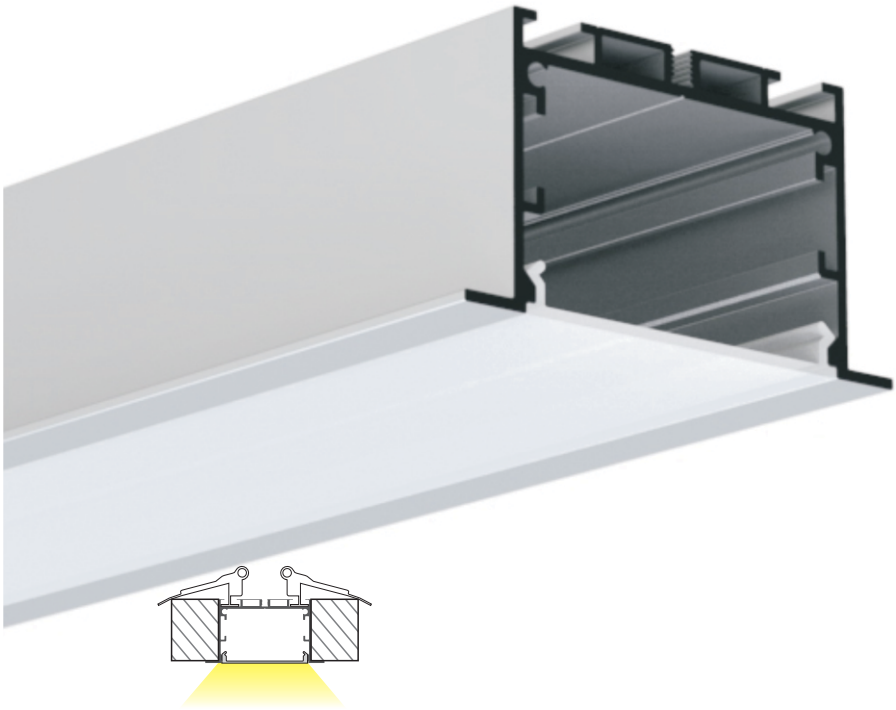

·Installation method

Cover: PC/Clear/Milky

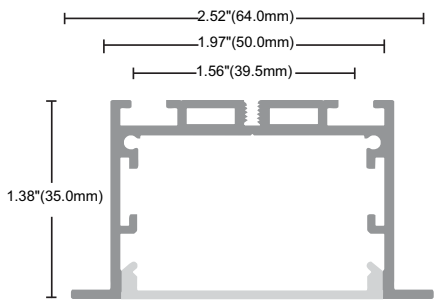

Silver Black White

Sort by Product width

PL010


End Caps


Metallic mounting clips


180° joining connector


90° joining connector


Suspension wire

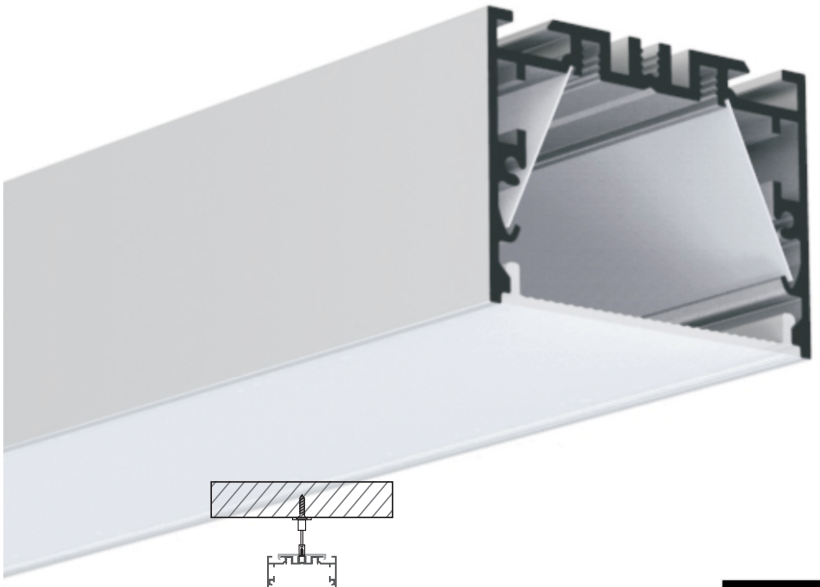

Cover: PC/Clear/Milky

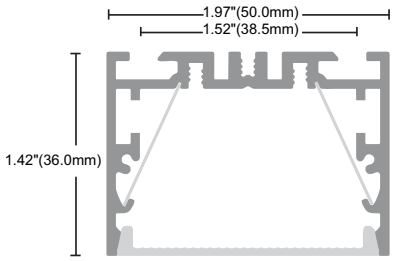


Silver Black White

·Installation method

Sort by Product width


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL010U


End Caps


Metallic mounting clips


Mounting clips

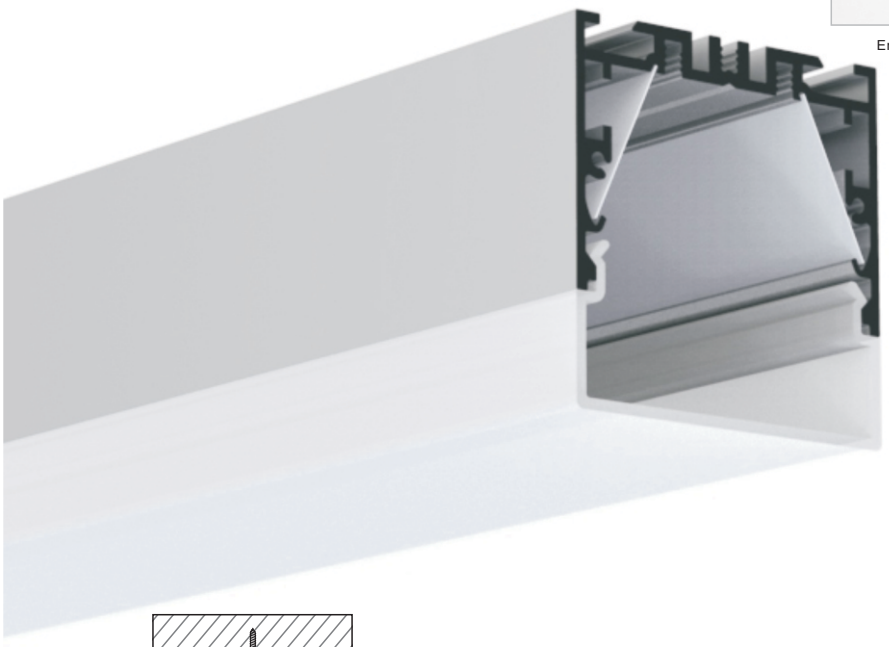

Cover: PC/Clear/Milky




Silver Black White


·Installation method

Sort by Product width

PL011


Mounting clips


End Caps


180° joining connector


90° joining connector

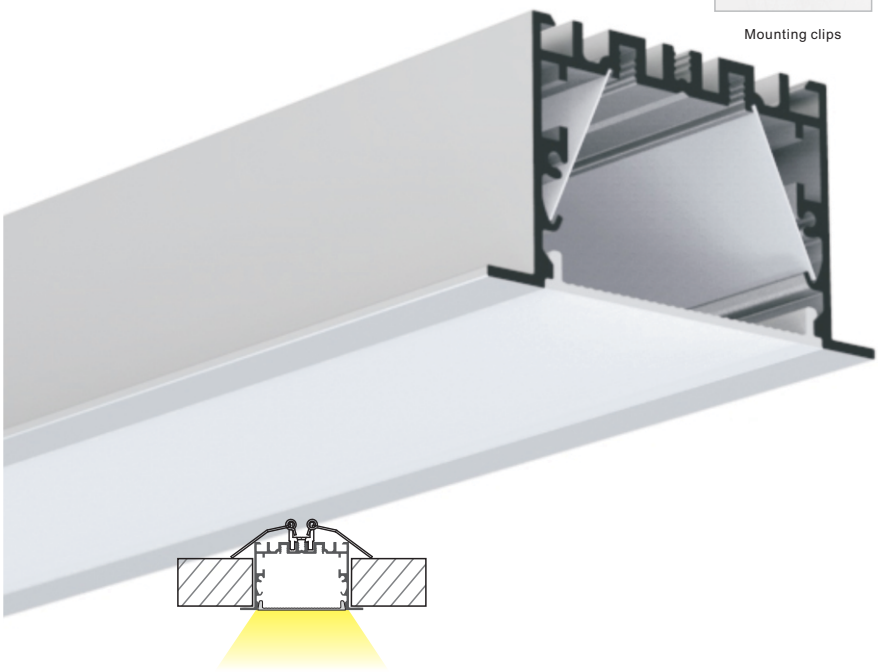

Cover: PC/Clear/Milky

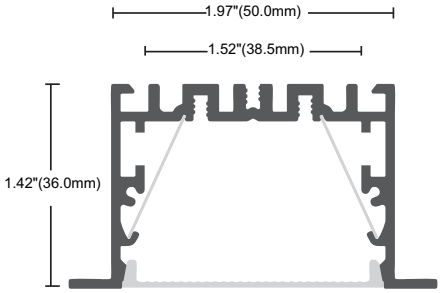


Silver Black White

·Installation method

PL011U




End Caps


Metallic mounting clips


Mounting clips

Cover: PC/Clear/Milky

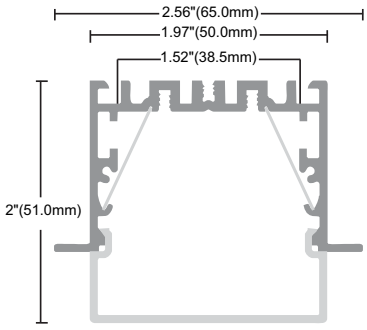


Silver Black White


·Installation method

PL135

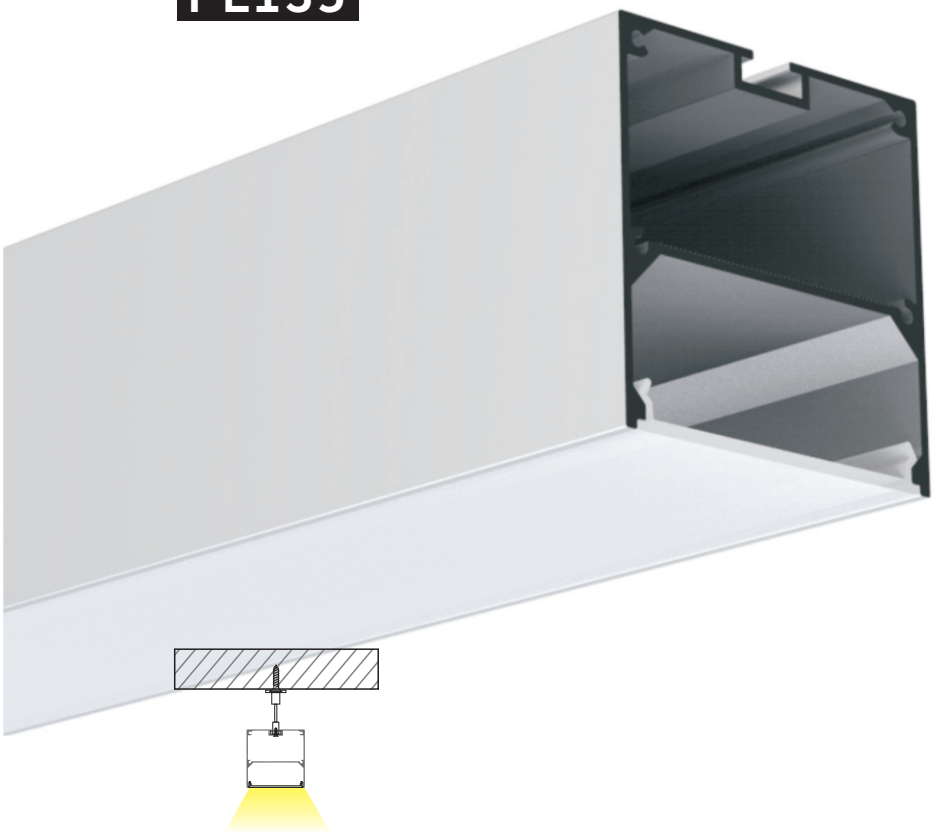



End Caps

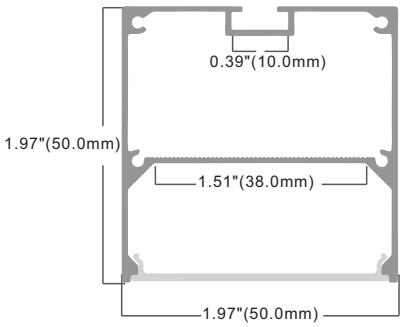

Silver Black White

PL105

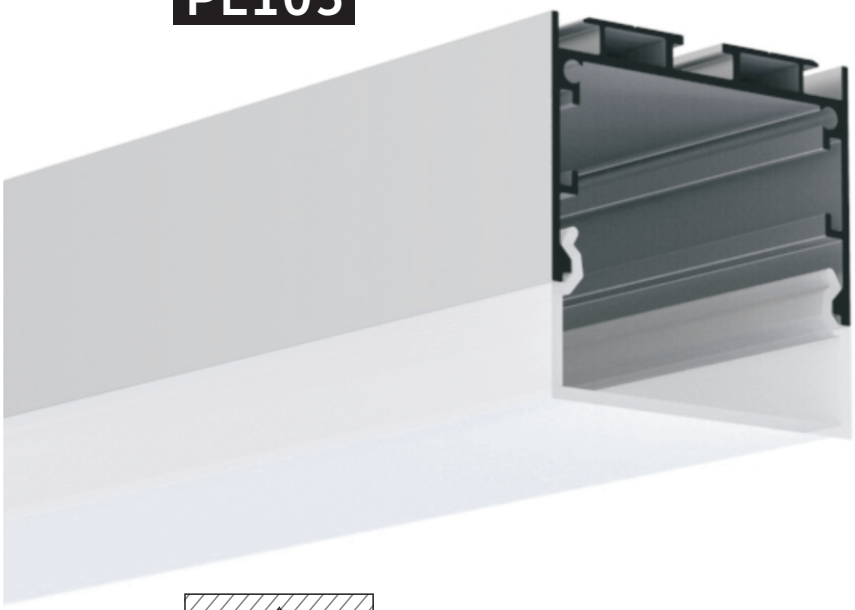



End Caps



Metallic mounting clips



Mounting clips

Cover: PC/Clear/Milky

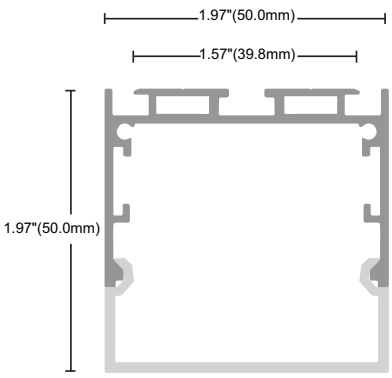

Silver Black White



·Installation method

PL050

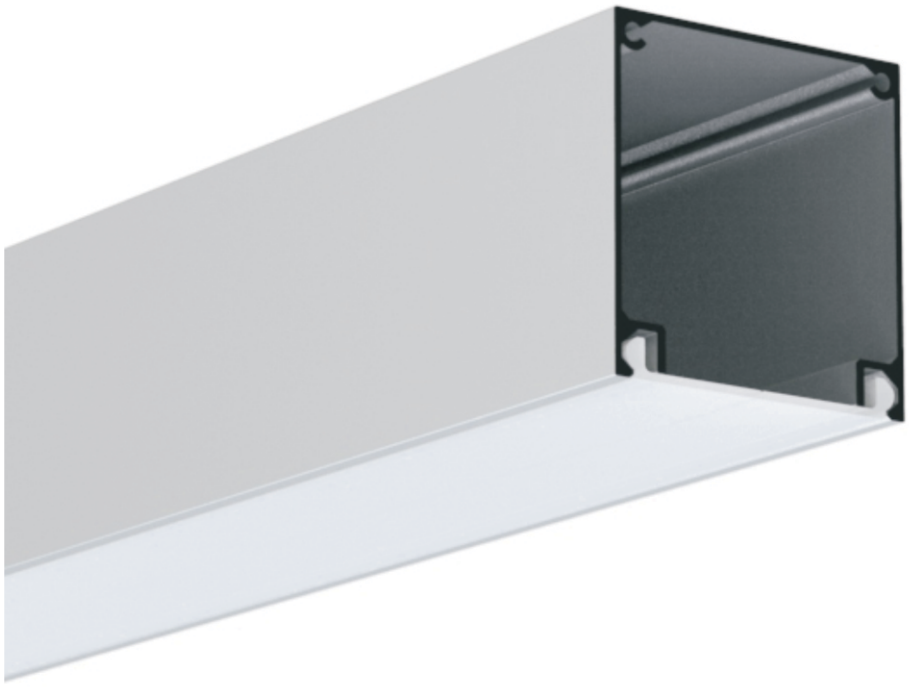



End Caps

The power supply box

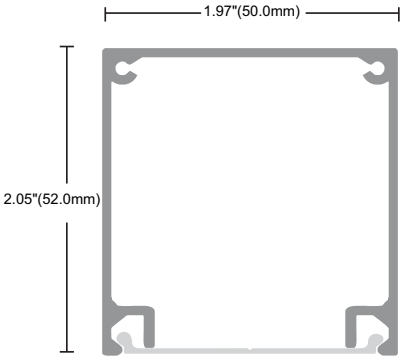

PL059

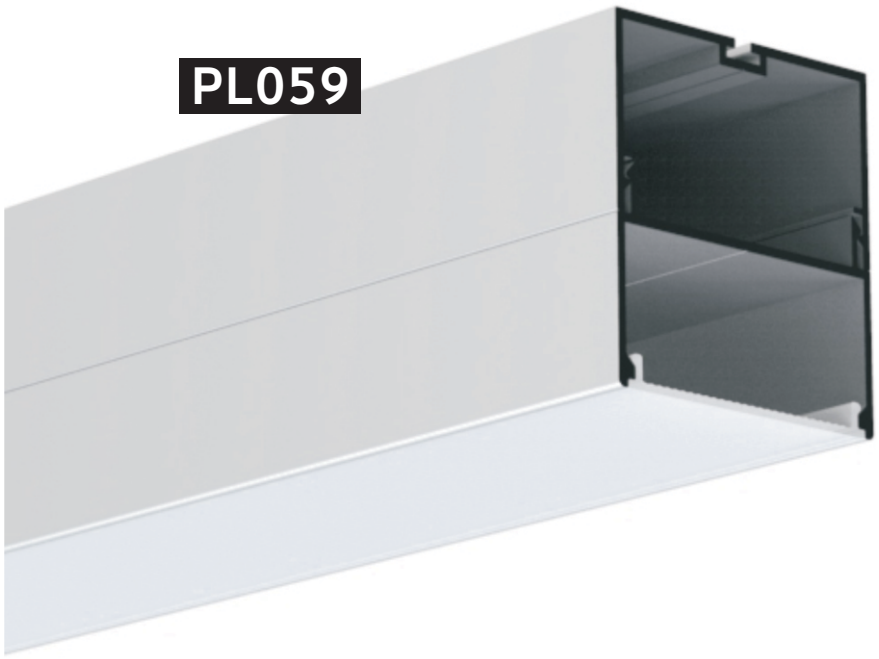



End Caps



Mounting clips

Cover: PC/Clear/Milky

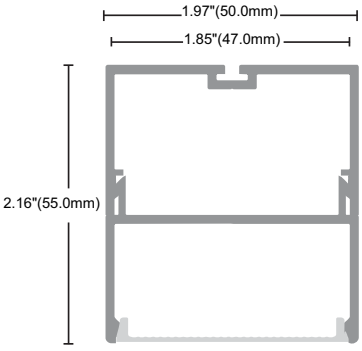



·Installation method

Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL058

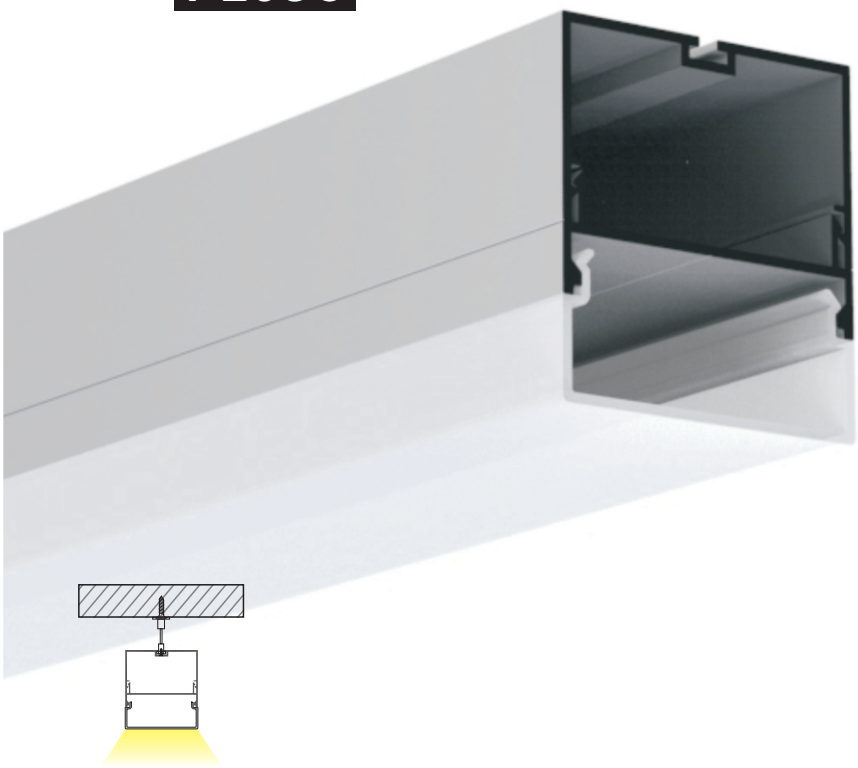

·Installation method



End Caps



Mounting clips

Cover: PC/Clear/Milky

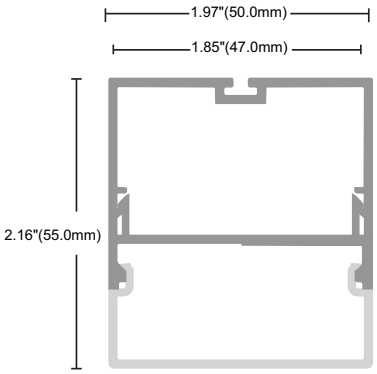

Silver Black White

PL057

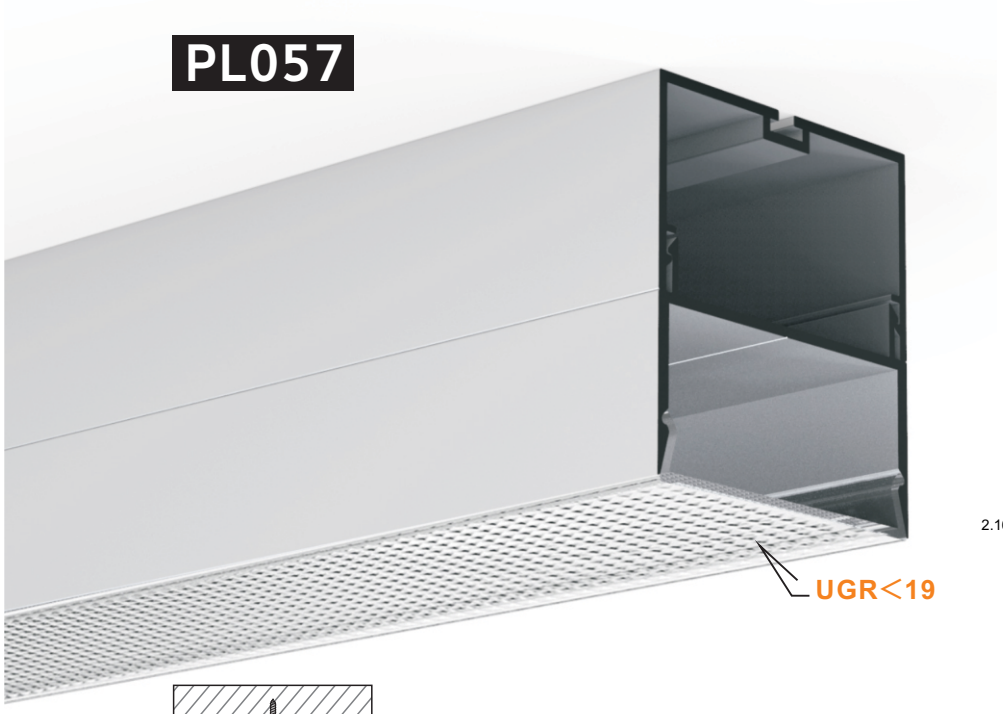



·Installation method



End Caps



Mounting clips

Cover: PC/Clear/Milky

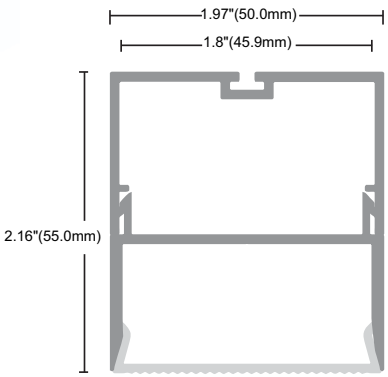

Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL048

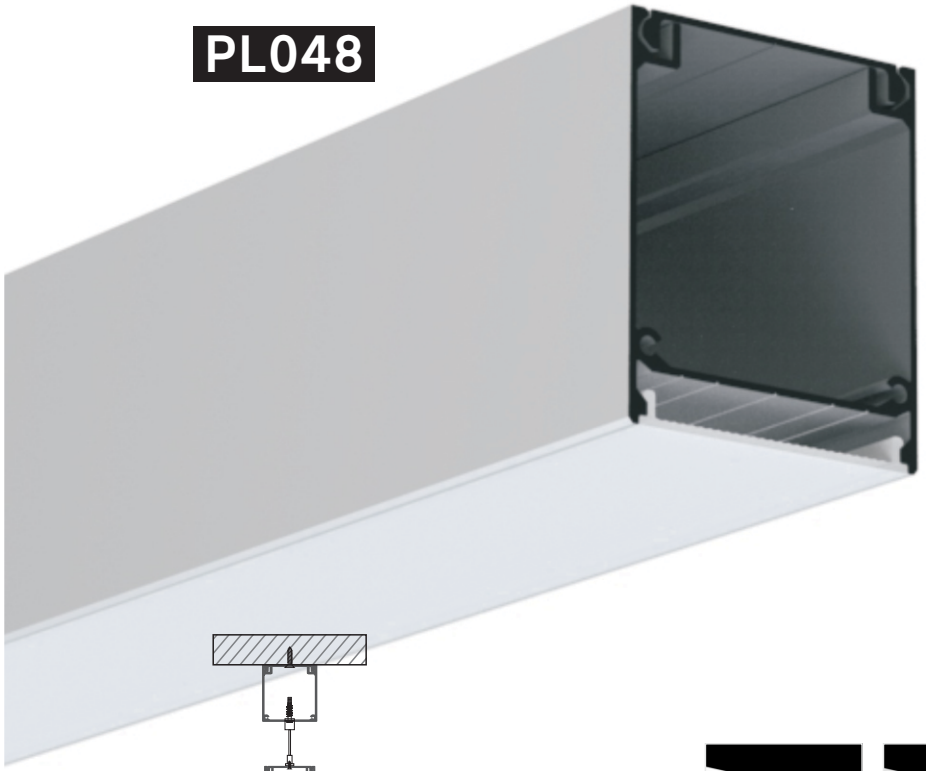

Cover: PC/Clear/Milky

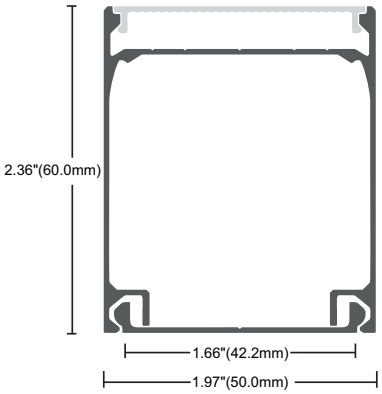

Silver Black White

·Installation method

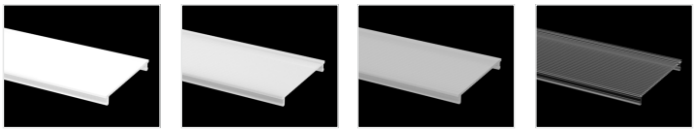

PMMA Opal | PC Milky | PC Frosted | PC Clear

PL004

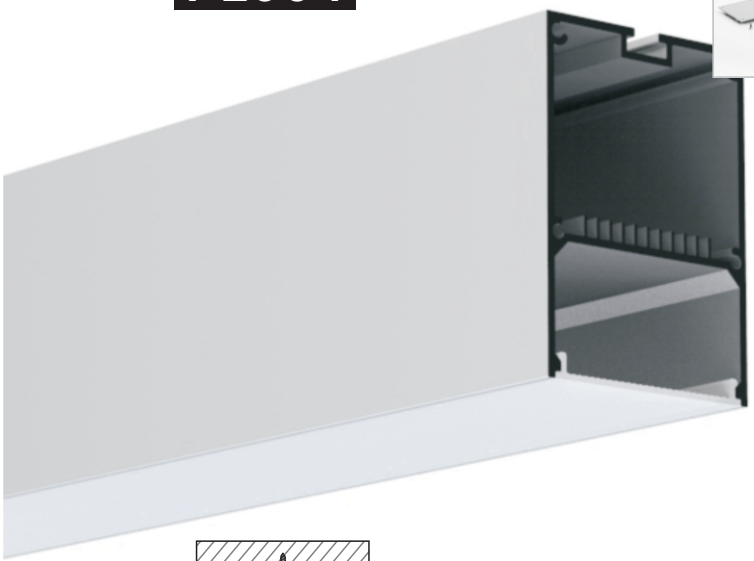



End Caps | Suspension wire | 180° joining connector | 90° joining connector

Cover: PC/Clear/Milky

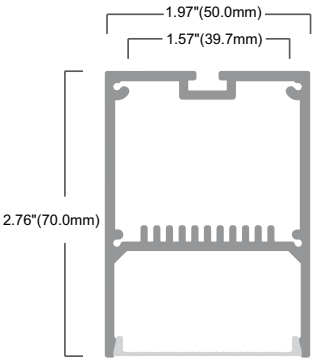

Silver Black White



·Installation method

Sort by Product width

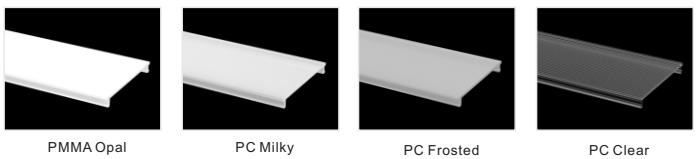

PMMA Opal | PC Milky | PC Frosted | PC Clear

PL049

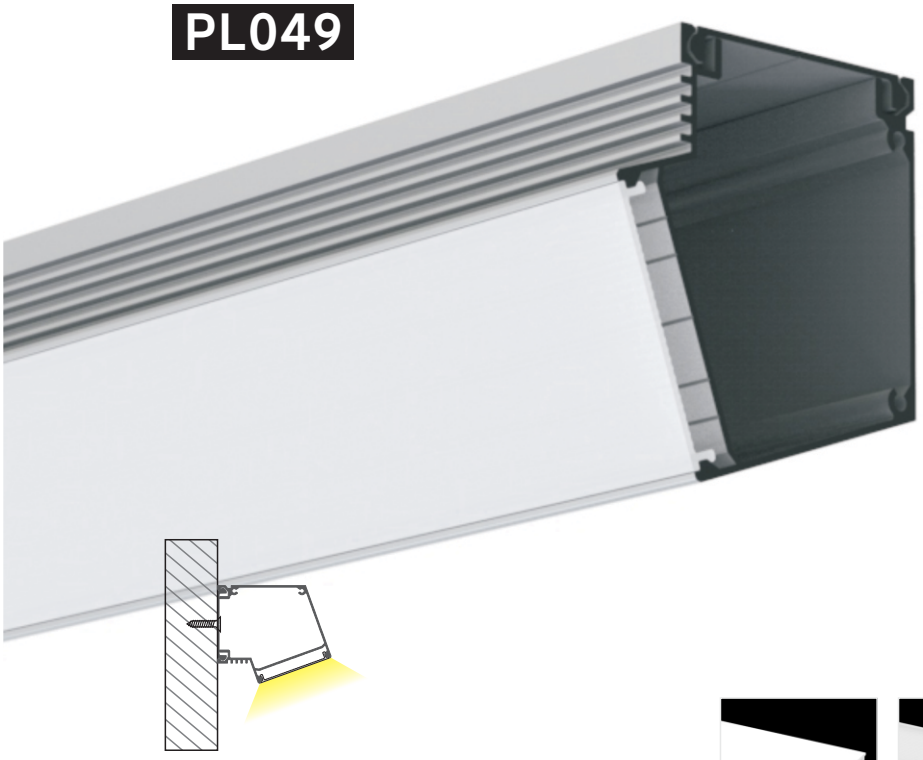



End Caps

Cover: PC/Clear/Milky

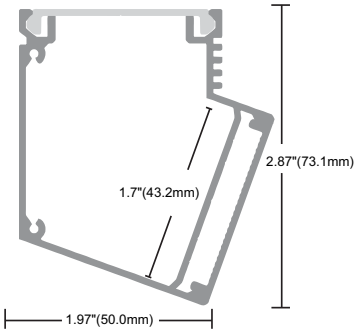

Silver Black White

·Installation method



PMMA Opal PC Milky PC Frosted PC Clear

PL107



End Caps Metallic mounting clips Metallic mounting clips Mounting clips

Cover: PC/Clear/Milky

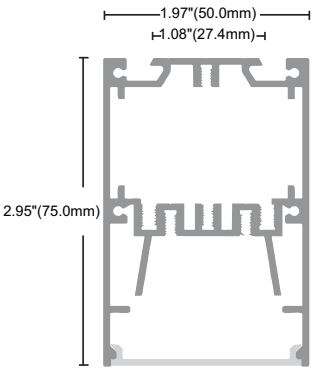

Silver Black White

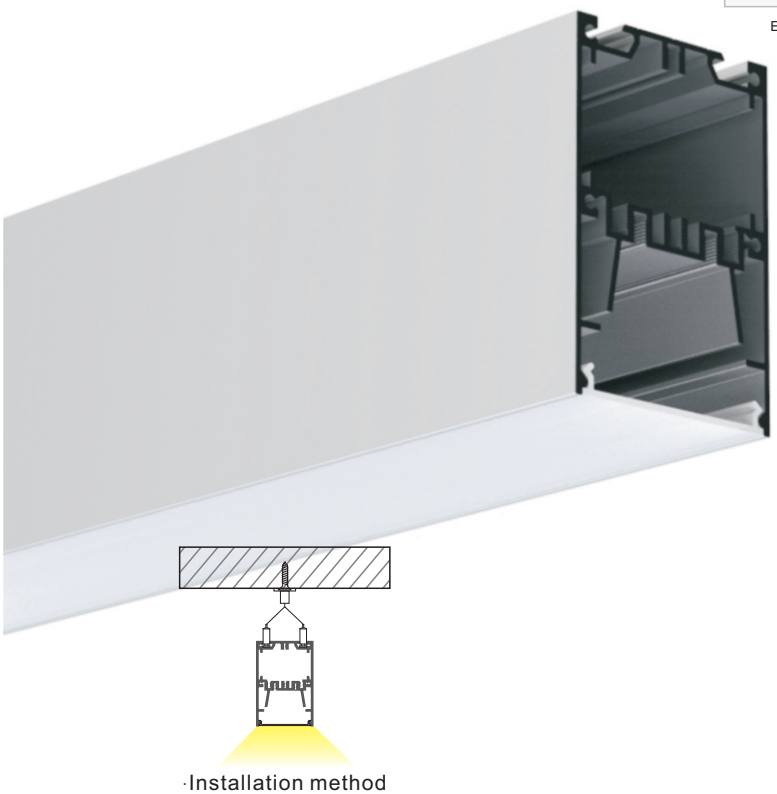

·Installation method

PL108

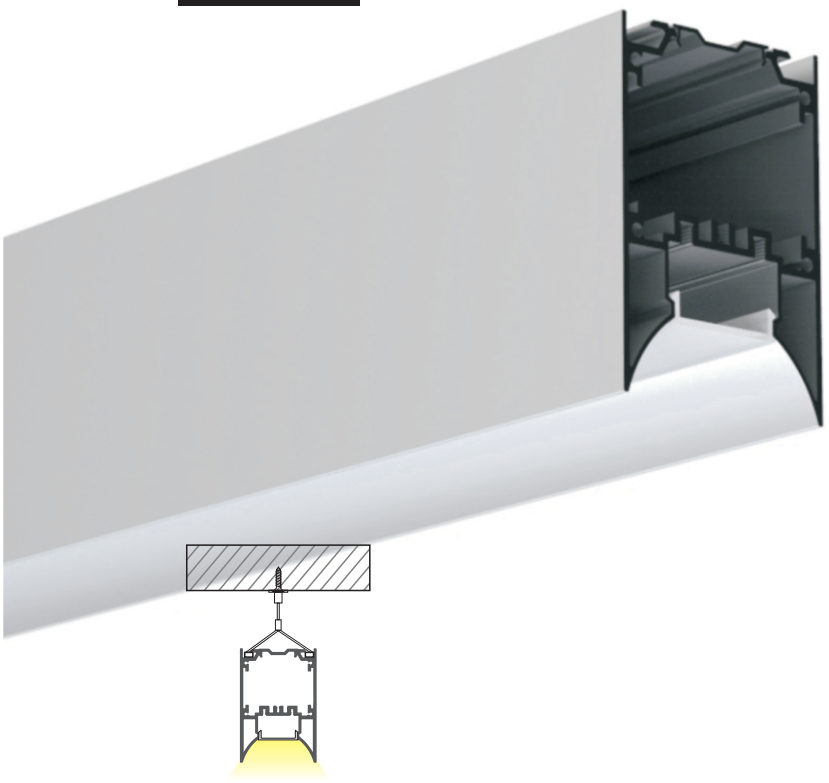



Mounting clips



End Caps



Metallic mounting clips

Cover: PC/Clear/Milky

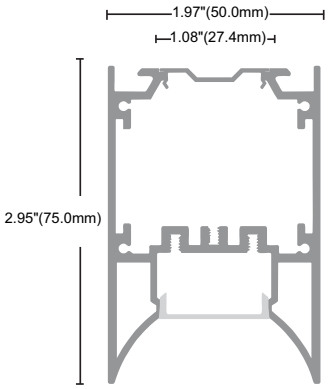



Silver Black White

·Installation method

PL109

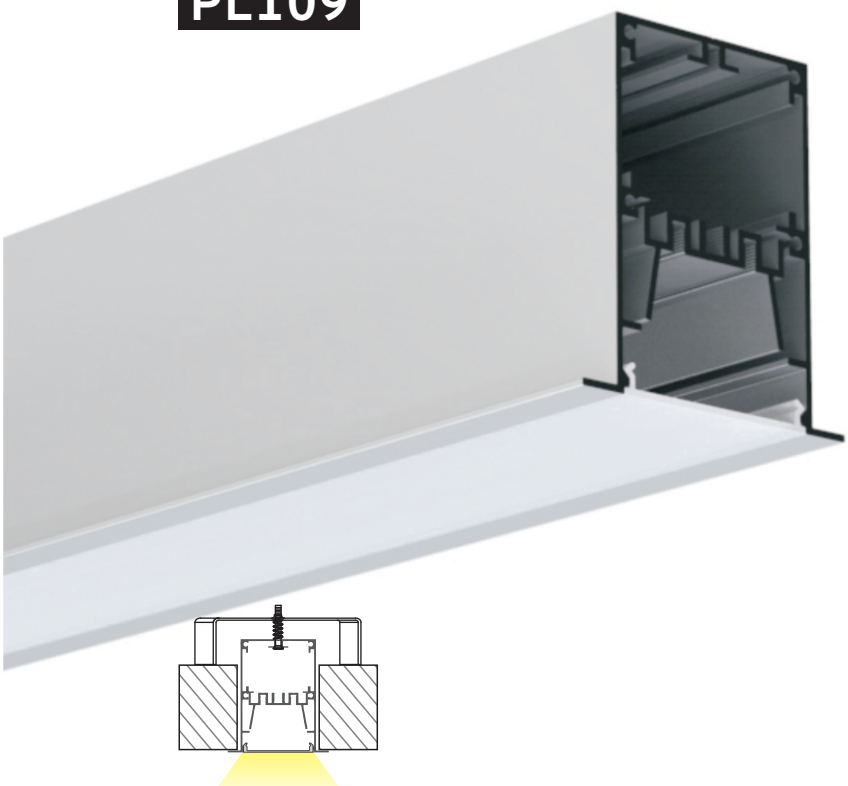



End Caps



Mounting clips



Metallic mounting clips

Cover: PC/Clear/Milky

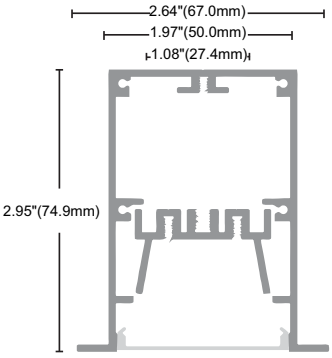



Silver Black White

·Installation method

Sort by Product width

PL097

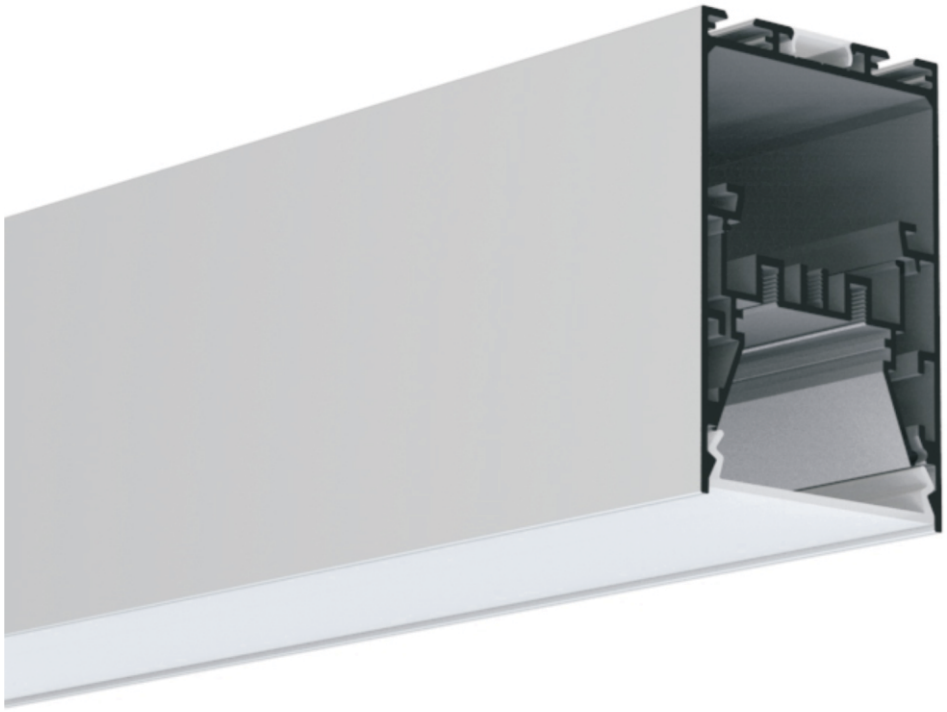



·Installation method



Silver Black White



End caps



Metallic mounting clips



Surface-mounted rotating base



End cap connect plate



Metallic mounting clips



Metallic mounting clips



Light barrier



Suspension wire



Safety rope



Connector V



Connector L



Connector T



Connector X

PL110

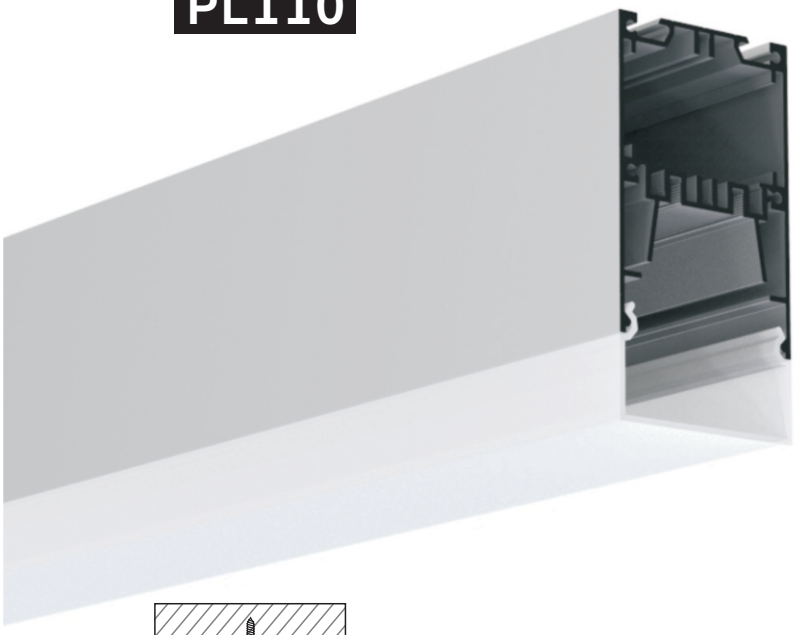



·Installation method



End Caps



Metallic mounting clips



Metallic mounting clips

Cover: PC/Clear/Milky

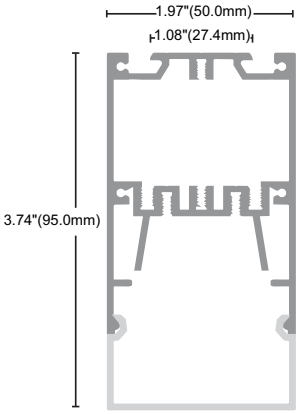

Silver Black White

PL111

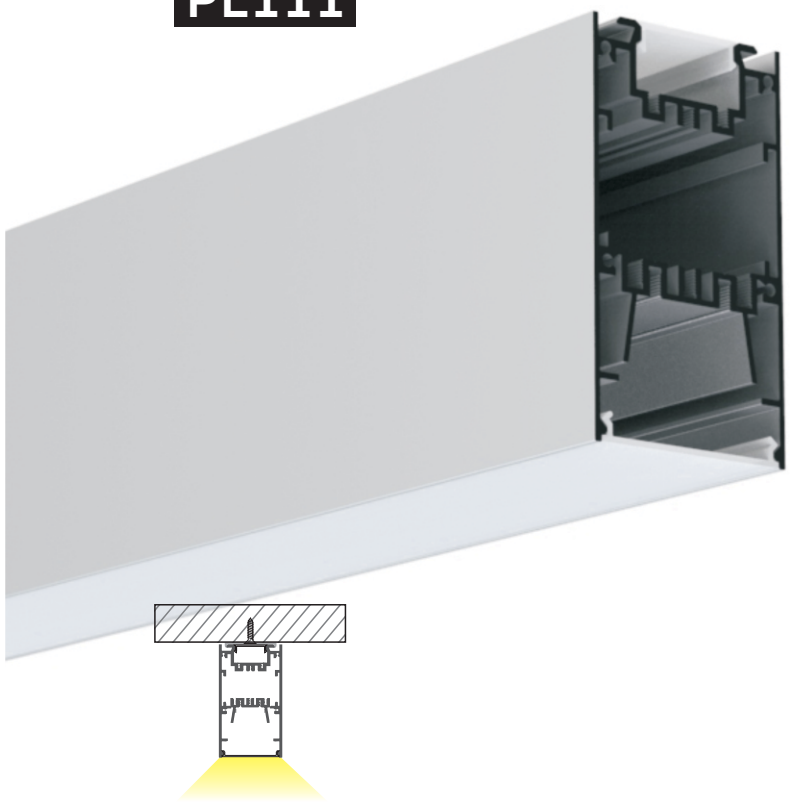

·Installation method



End Caps



Metallic mounting clips



Metallic mounting clips

Cover: PC/Clear/Milky

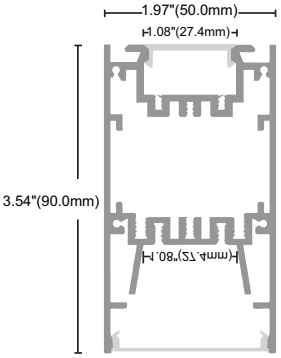

Silver Black White

PL060

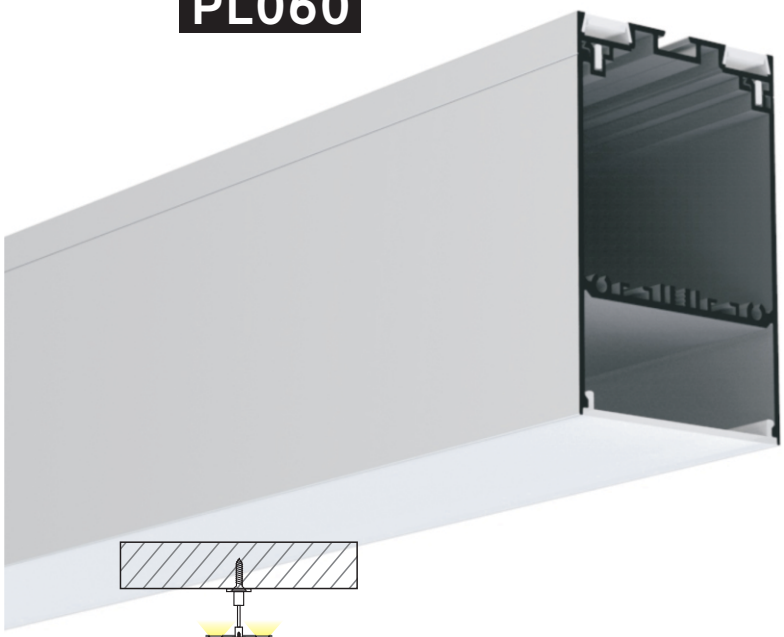



·Installation method



Suspension wire



End Caps

Cover: PC/Clear/Milky

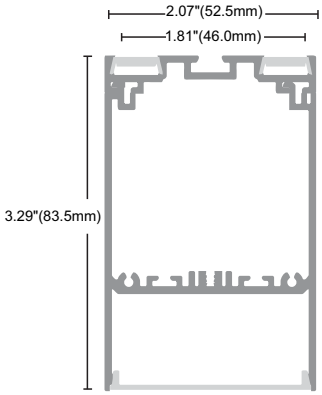

Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL051

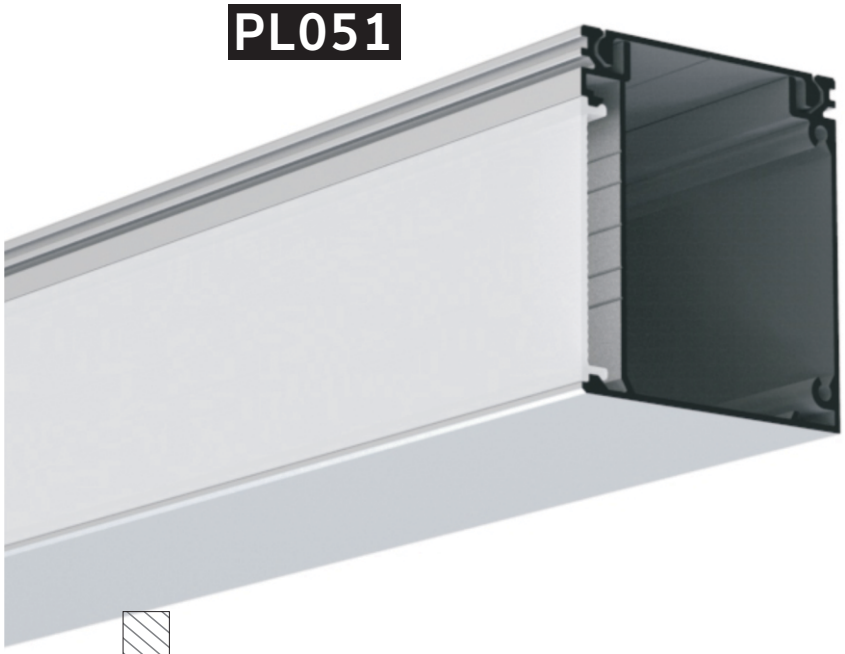



·Installation method



End Caps

Cover: PC/Clear/Milky



Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL125

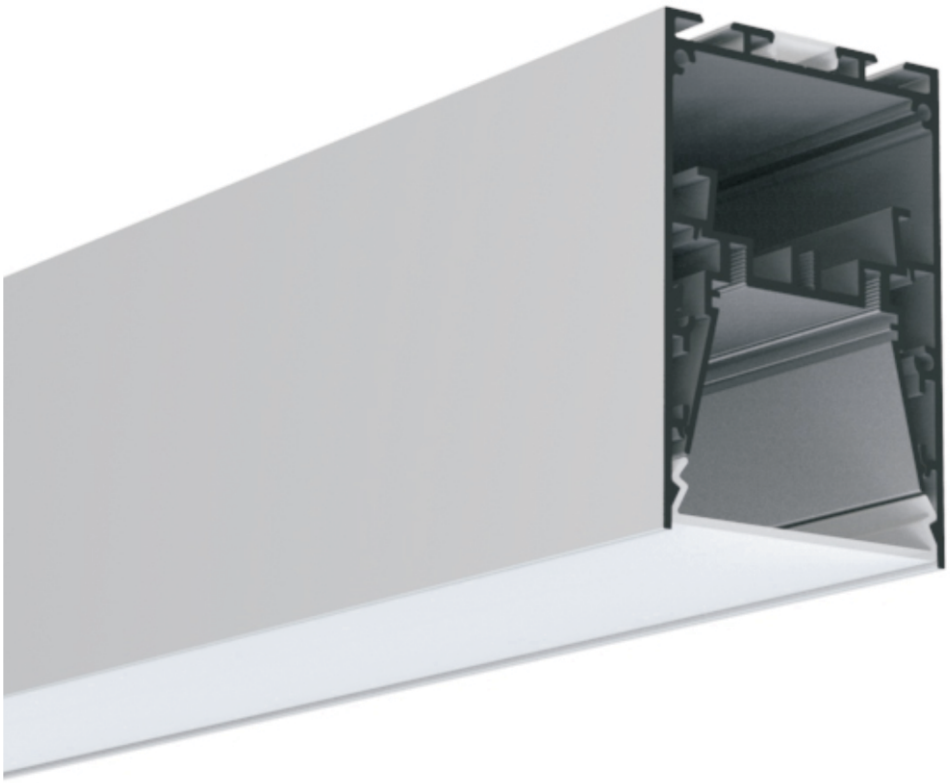



·Installation method





End caps



Metallic mounting clips



Surface-mounted rotating base



End cap connect plate



Metallic mounting clips



Metallic mounting clips



Light barrier



Suspension wire



Safety rope



Connector L



Connector IL



Connector T



Connector X

PL125 Series

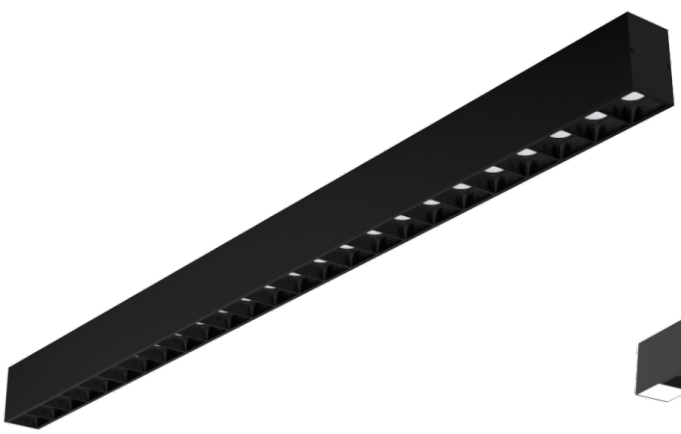



PL125C(five in one)

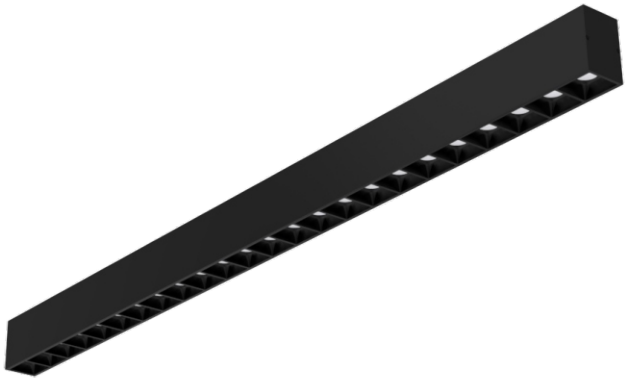



PL125E(three in one)

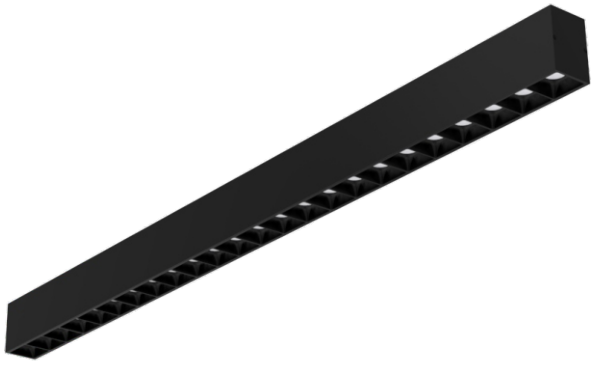

PL125F(single reflective cup)

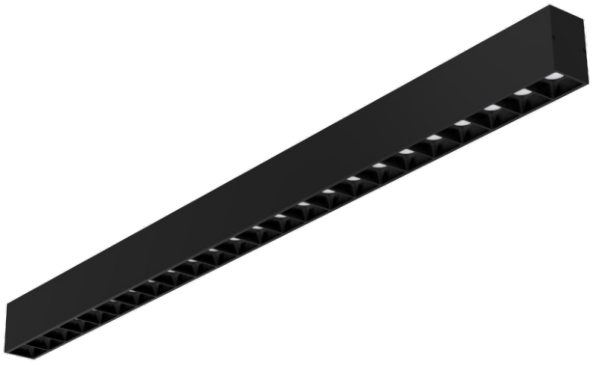

PL125G(single reflective cup)

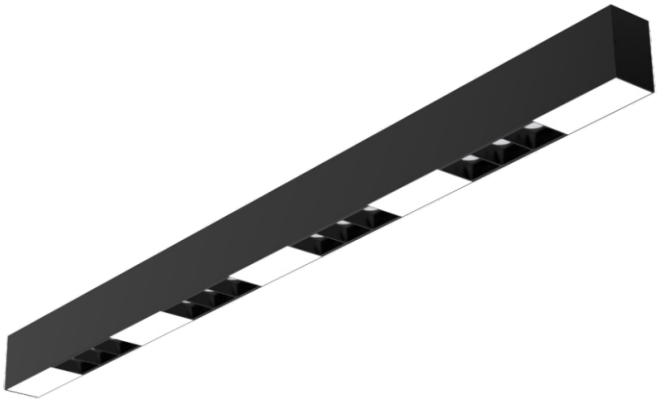

PL125H(three in one)

PL026





End Caps



Mounting clips

Cover: PC/Clear/Milky

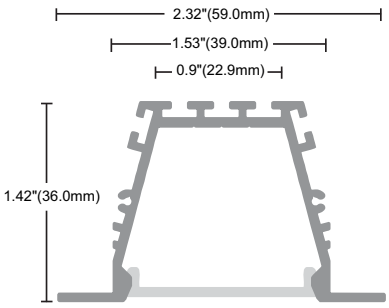

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL027





End Caps



Mounting clips

Cover: PC/Clear/Milky

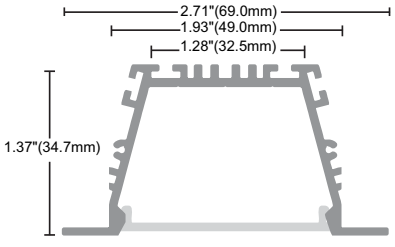

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL236

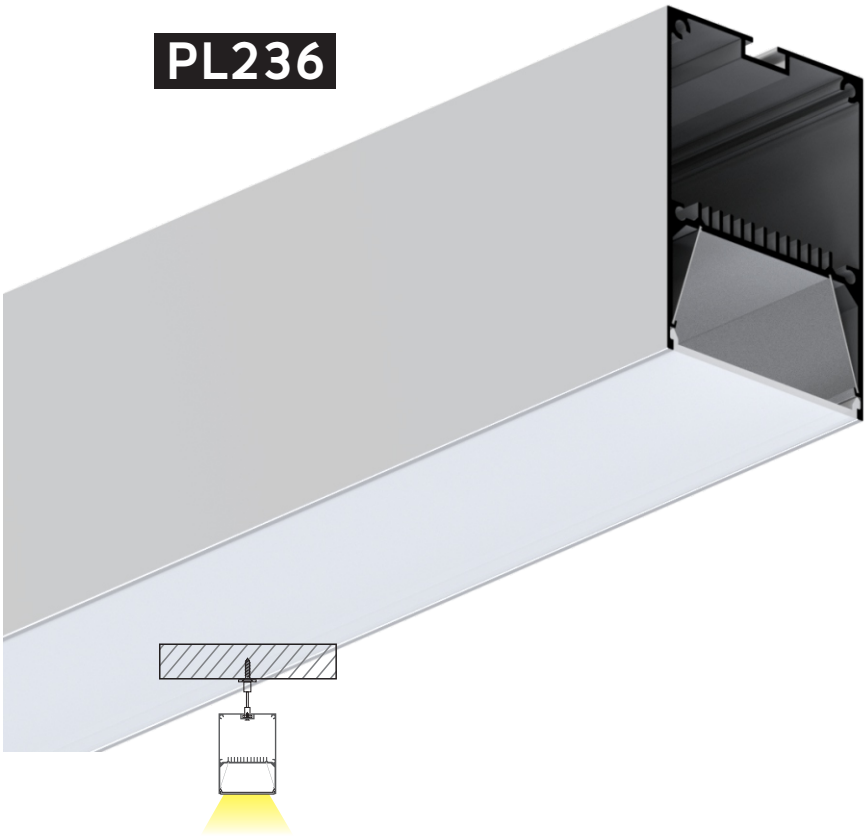



End Caps



Suspension wire



PL243





End Caps



Metallic mounting clips



Suspension wire





·Installation method

PL052

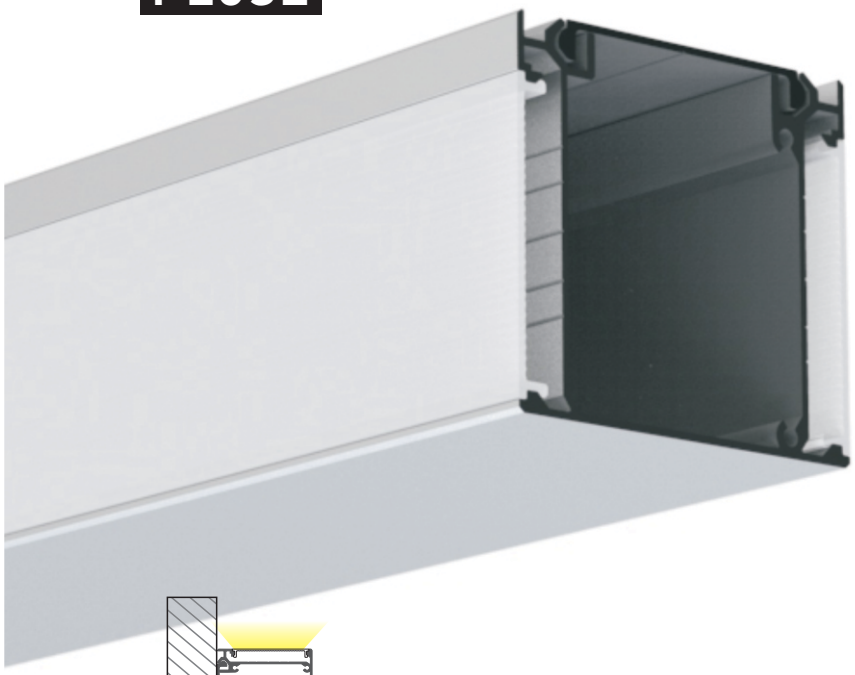



End Caps

Cover: PC/Clear/Milky

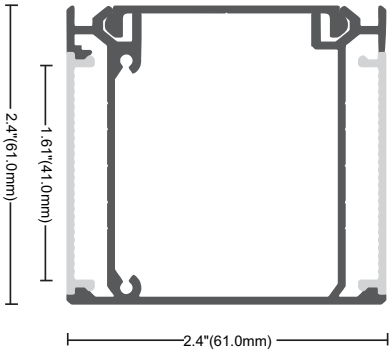

Silver Black White



·Installation method



PMMA Opal PC Milky PC Frosted PC Clear

PL106





End Caps Metallic mounting clips Mounting clips

Cover: PC/Clear/Milky

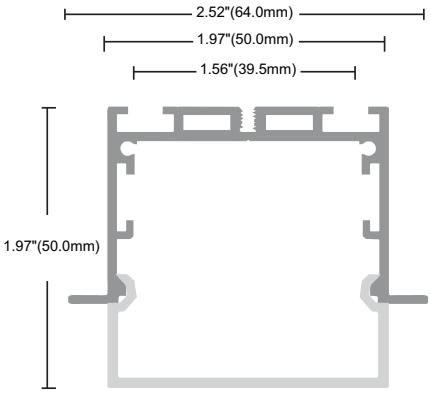

Silver Black White



·Installation method

PL001


End Caps


Metallic mounting clips


180° joining connector


90° joining connector

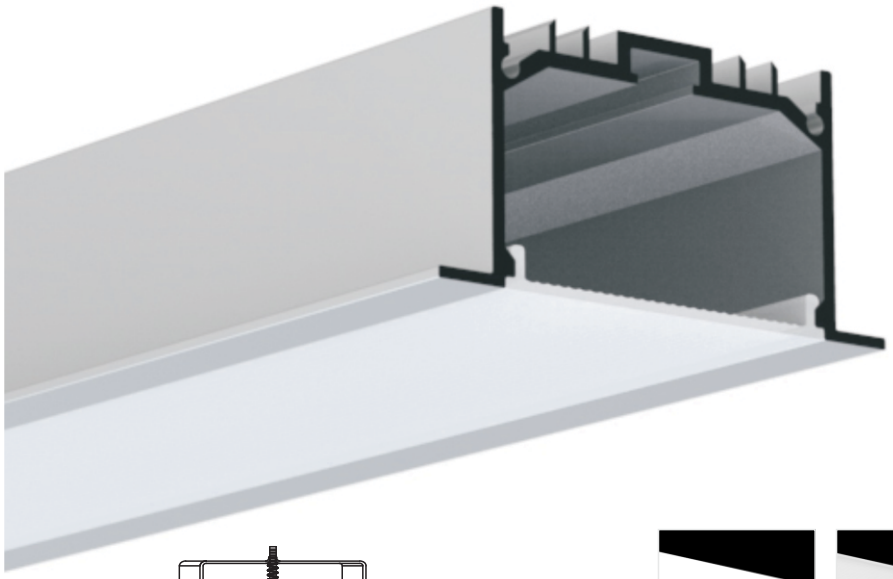

Cover: PC/Clear/Milky

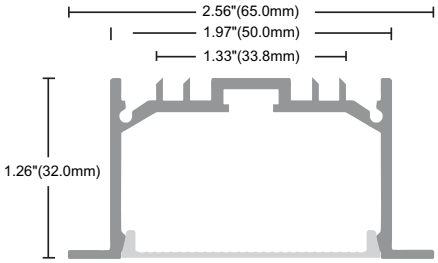

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

Sort by Product width

PL112

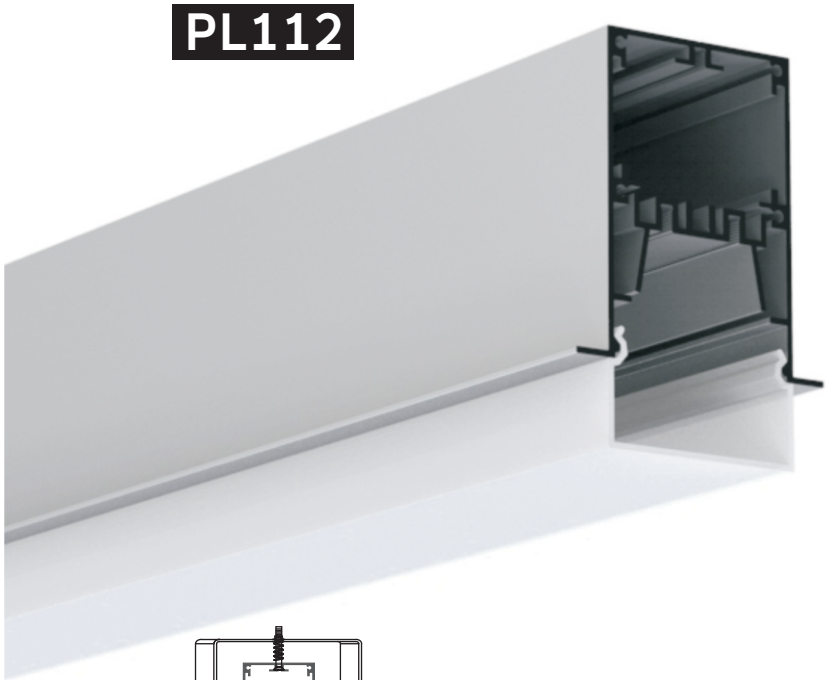


End Caps


Mounting clips

Cover: PC/Clear/Milky

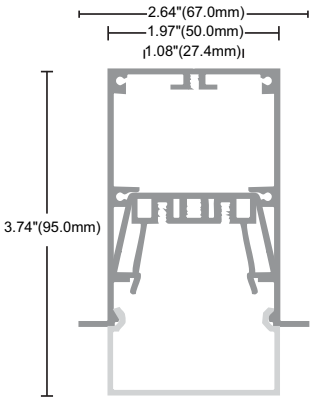

Silver Black White


·Installation method

PL237

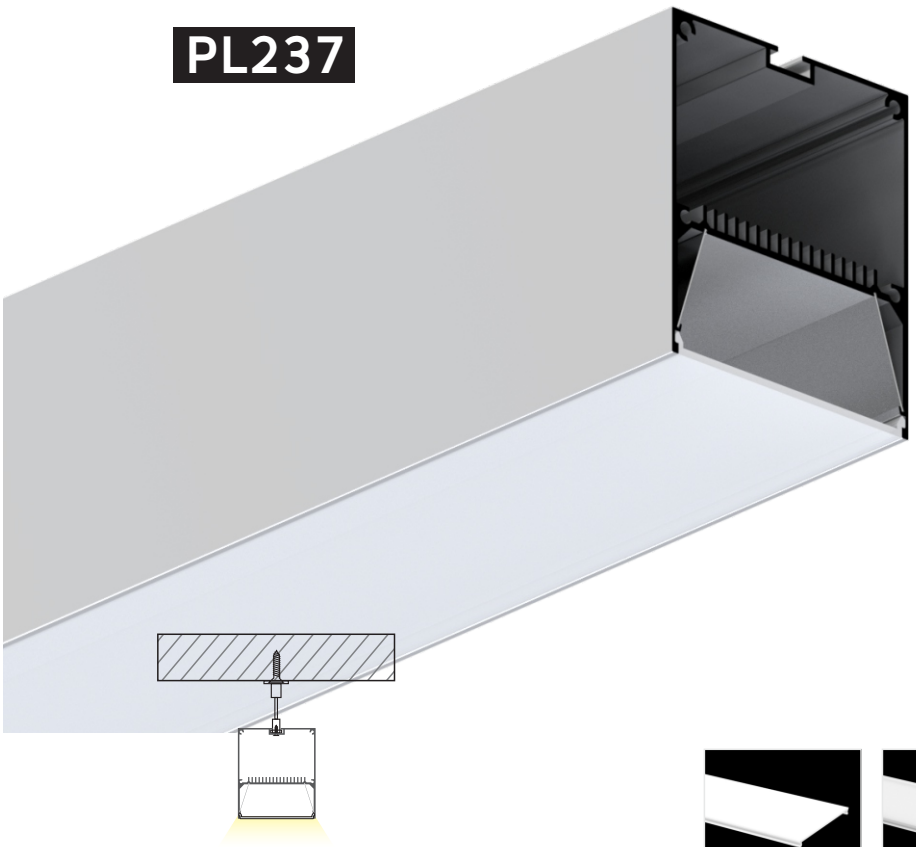



End Caps



Suspension wire



·Installation method

PMMA Opal



PC Milky



PC Frosted



PC Clear

PL055

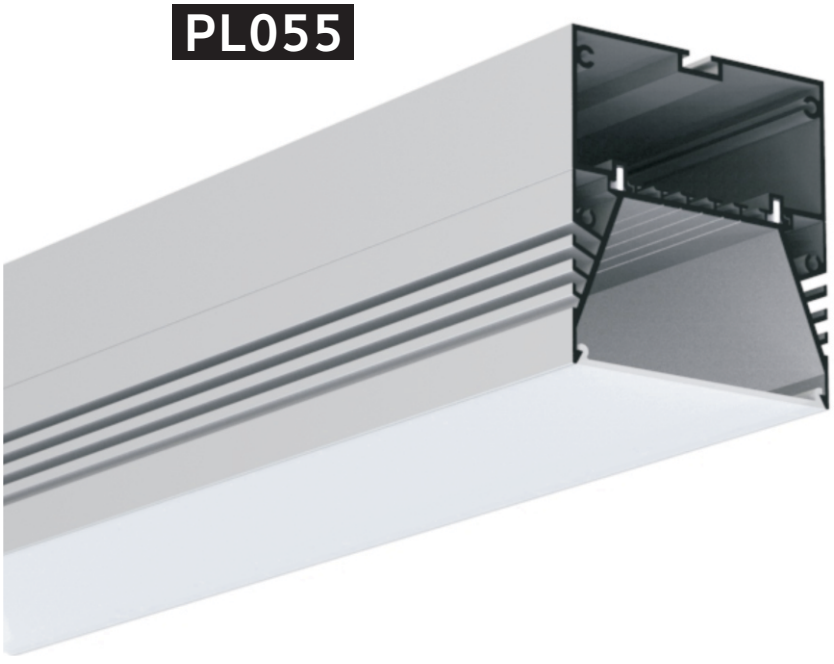



End Caps



Suspension wire

Cover: PC/Clear/Milky

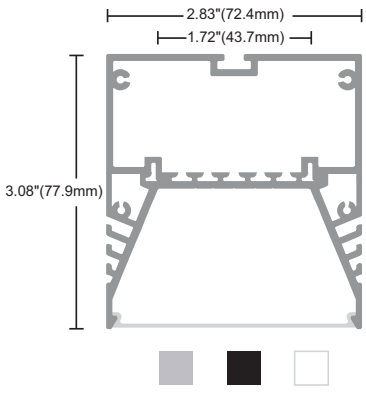

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL054

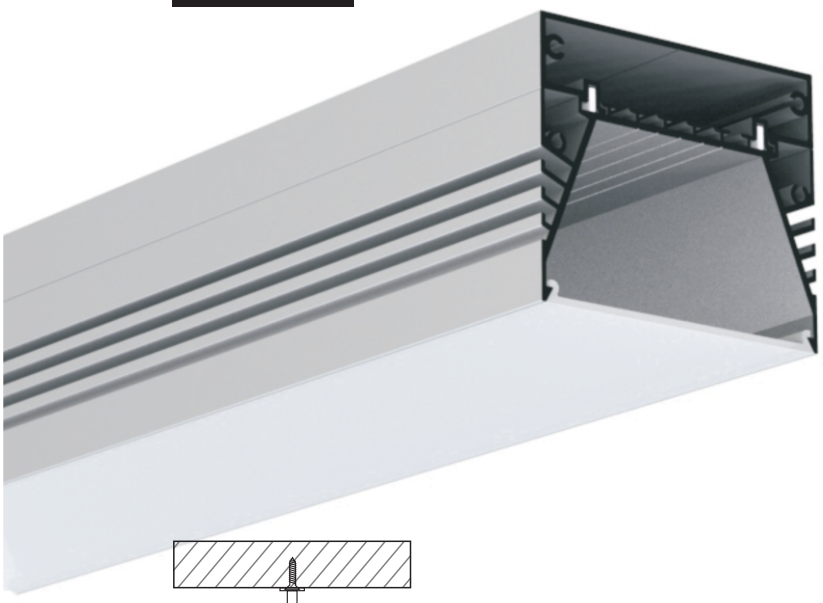



·Installation method



End Caps



Suspension wire

Cover: PC/Clear/Milky

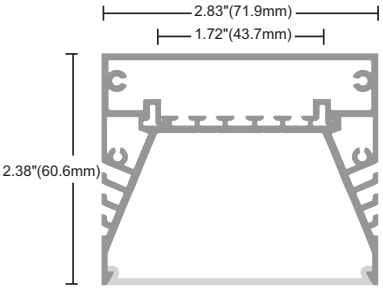

Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL006



End Caps



Suspension wire



180° joining connector



90° joining connector

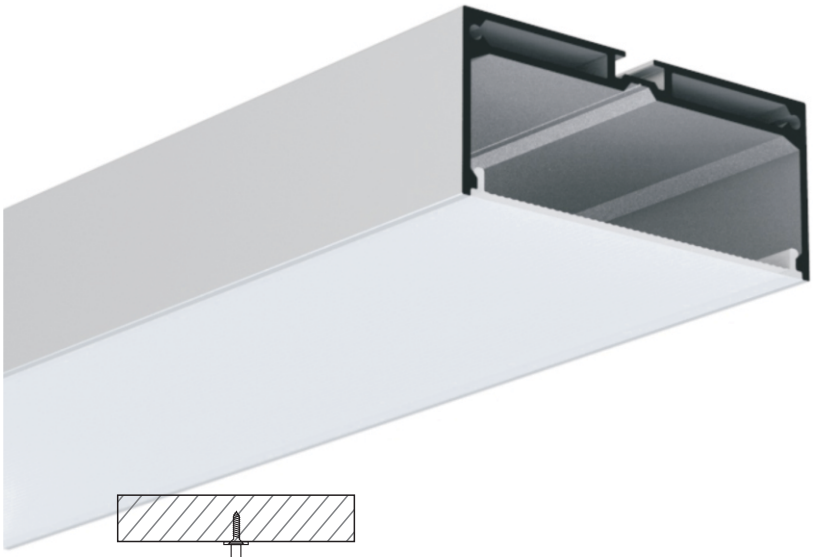



·Installation method

Cover: PC/Clear/Milky

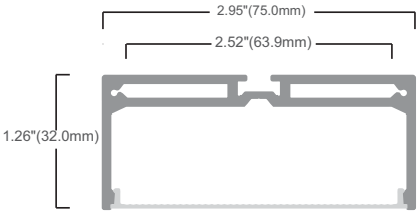

Silver Black White



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL012


End Caps


Suspension wire


180° joining connector


90° joining connector

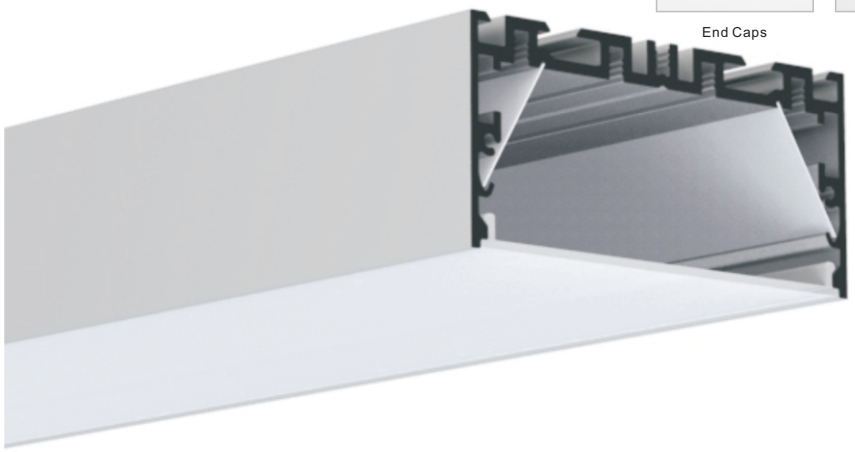

Cover: PC/Clear/Milky

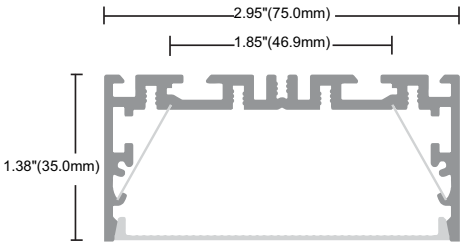


Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL012U


End Caps


Suspension wire


180° joining connector


90° joining connector

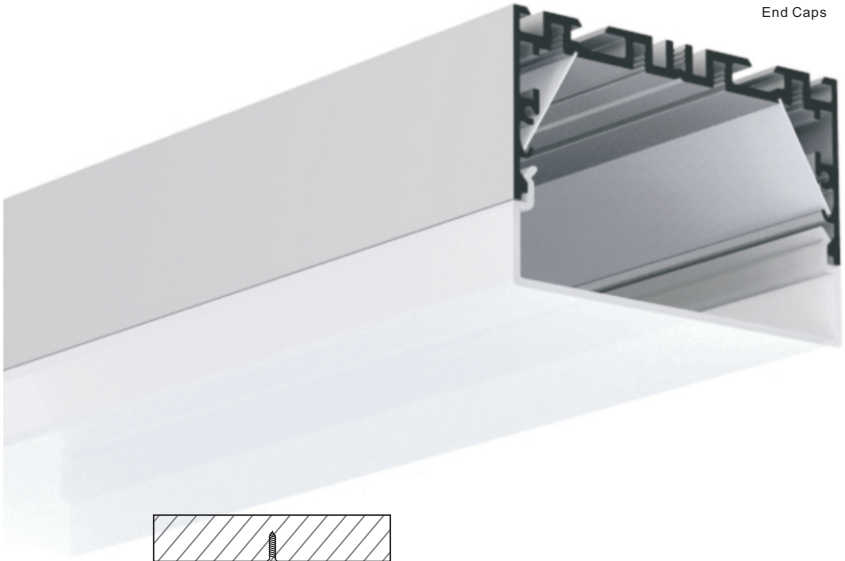

Cover: PC/Clear/Milky

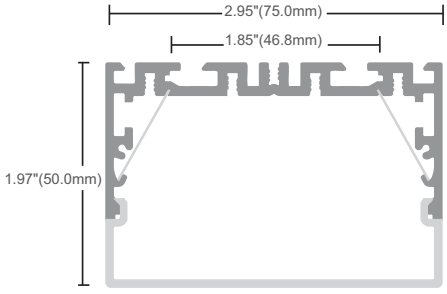


Silver Black White


·Installation method

PL115

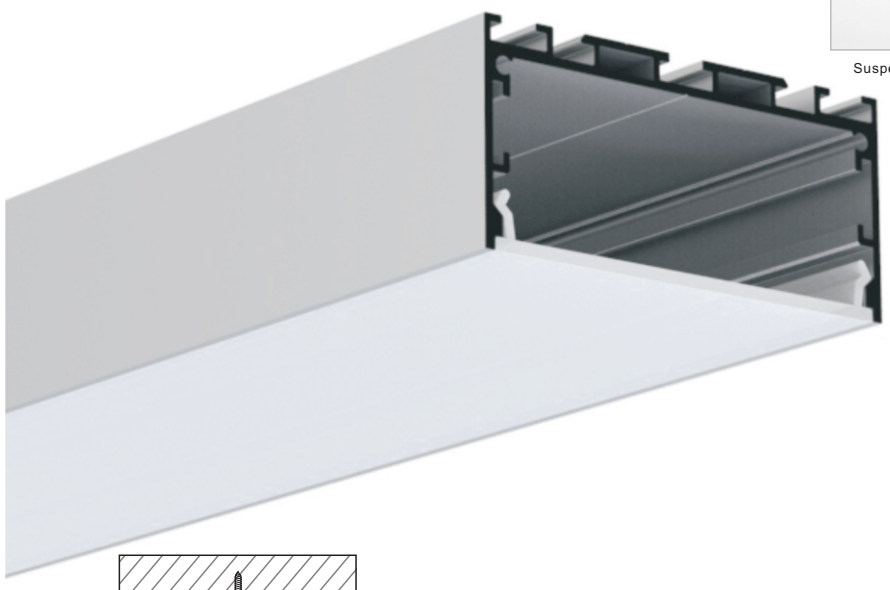



Suspension wire



End Caps



Metallic mounting clips

Cover: PC/Clear/Milky

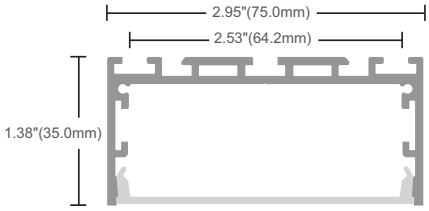

Silver Black White



·Installation method

Sort by Product width

PL117

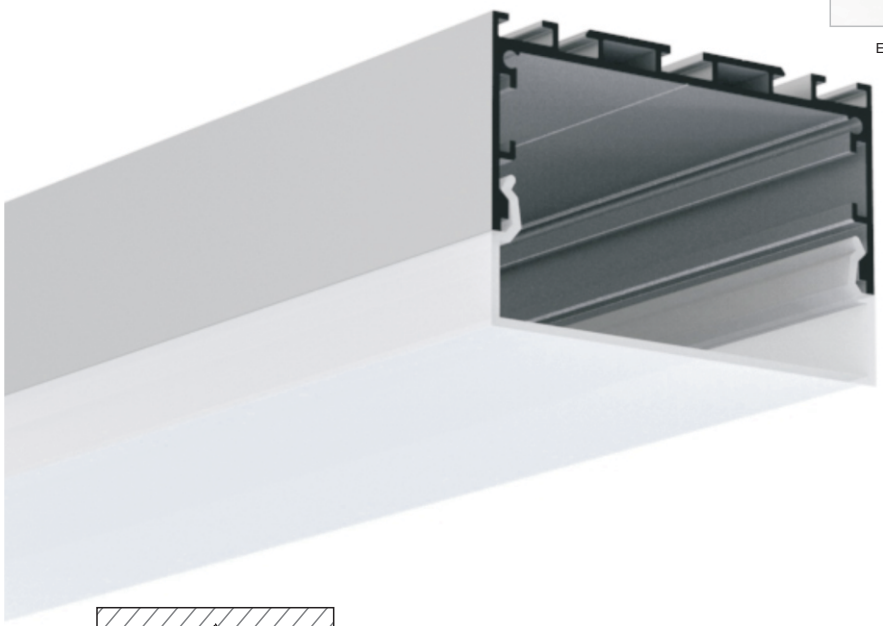



End Caps



Metallic mounting clips



Suspension wire

Cover: PC/Clear/Milky

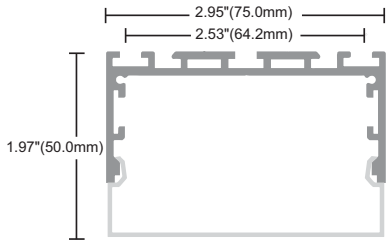

Silver Black White



·Installation method

Sort by Product width

PL118


End Caps


Metallic mounting clips


Suspension wire

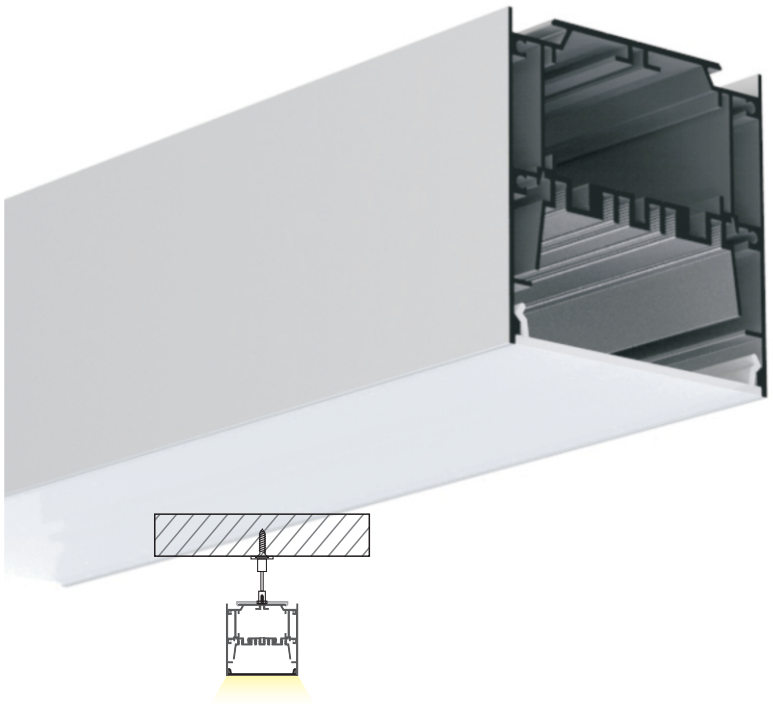

·Installation method

Cover: PC/Clear/Milky

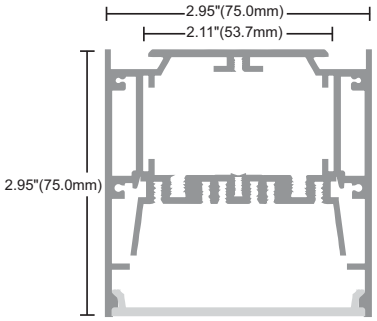

Silver Black White

PL119


End Caps


Metallic mounting clips





·Installation method

Cover: PC/Clear/Milky

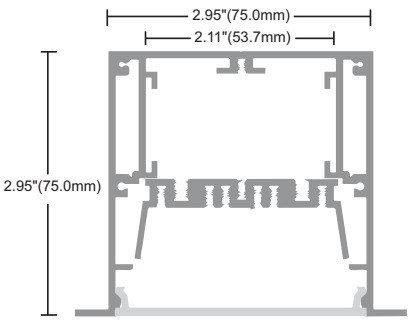

Silver Black White

PL120

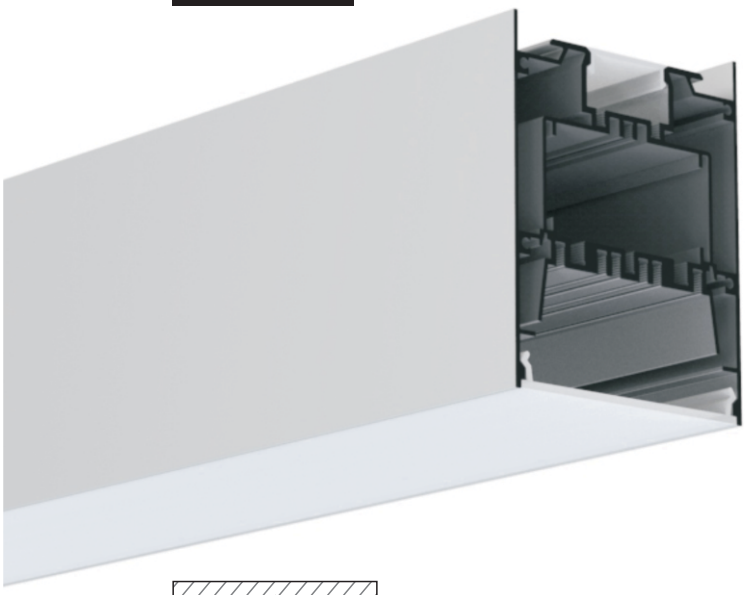



·Installation method



Suspension wire



End Caps



Metallic mounting clips

Cover: PC/Clear/Milky

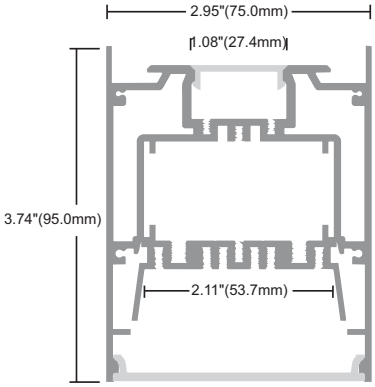

Silver Black White

PL121

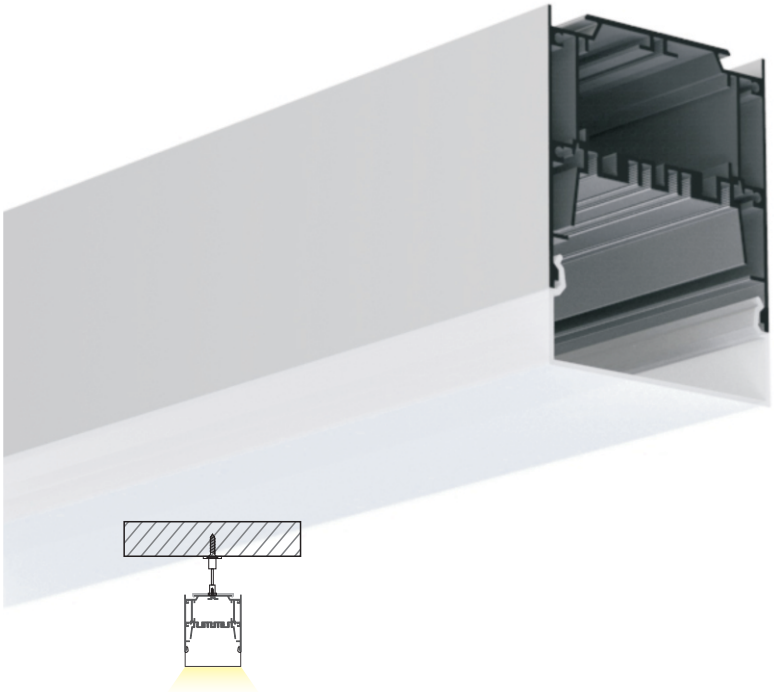

·Installation method



End Caps



Metallic mounting clips



Metallic mounting clips

Cover: PC/Clear/Milky

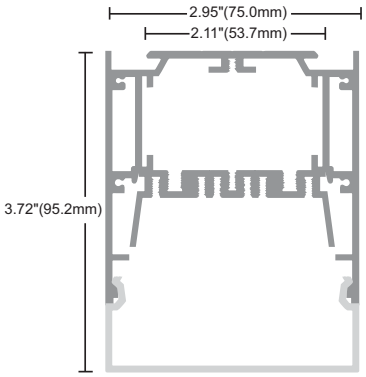

Silver Black White

PL126

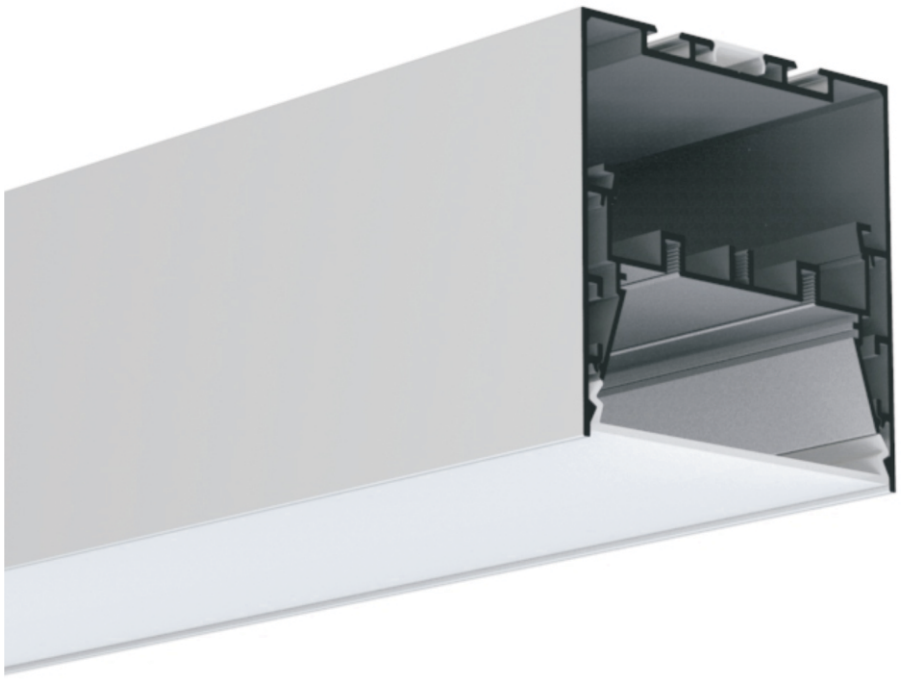



·Installation method

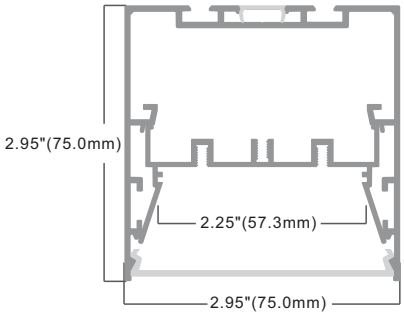

Silver Black White



End caps



Metallic mounting clips



Surface-mounted rotating base



End cap connect plate



Metallic mounting clips



Metallic mounting clips



Light barrier



Suspension wire



Safety rope



Connector V



Connector L



Connector T



Connector X

PL028




End Caps


Mounting clips

Cover: PC/Clear/Milky

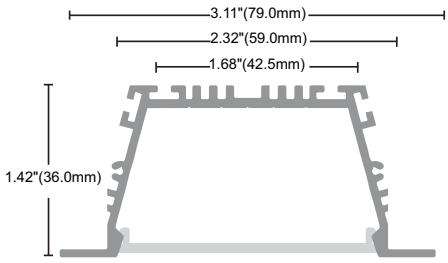

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL008


End Caps


Endcap connect plate


180° joining connector


90° joining connector


Suspension wire

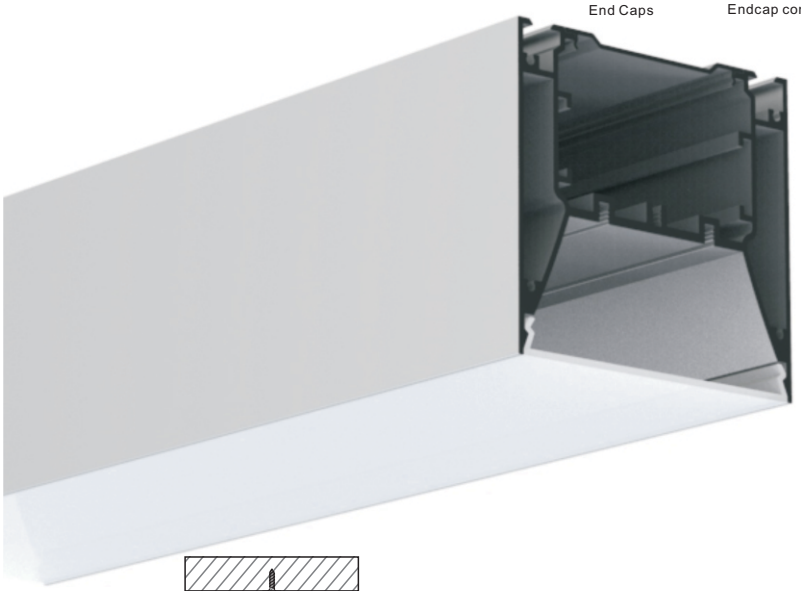

Cover: PC/Clear/Milky

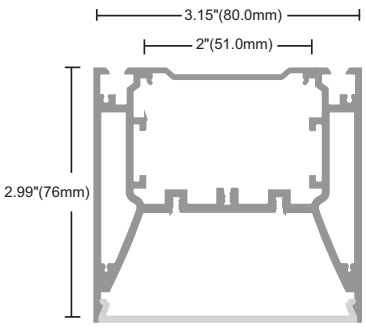

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL114



End Caps



Mounting clips

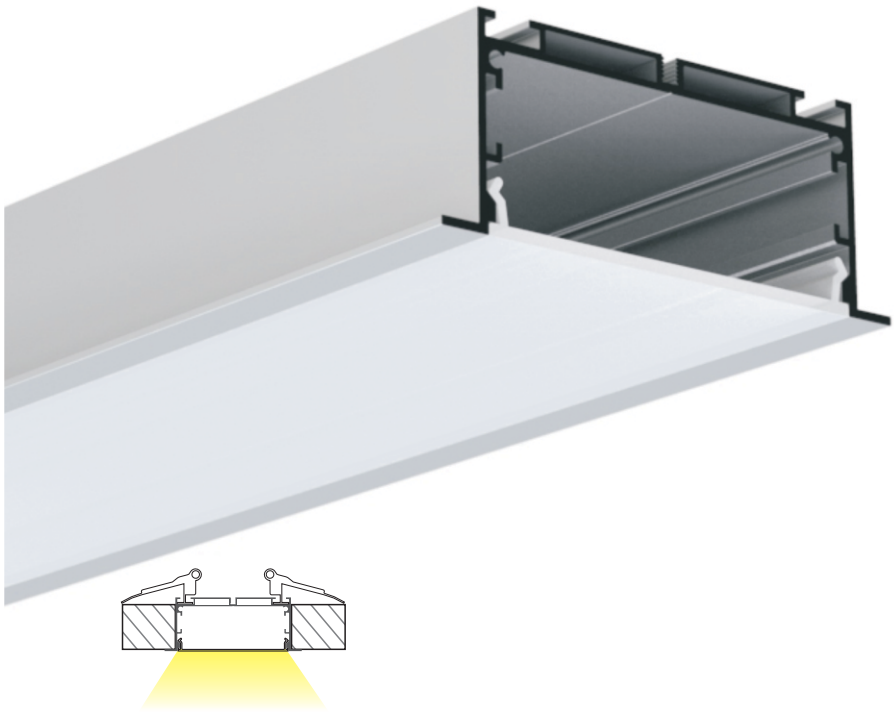

Cover: PC/Clear/Milky

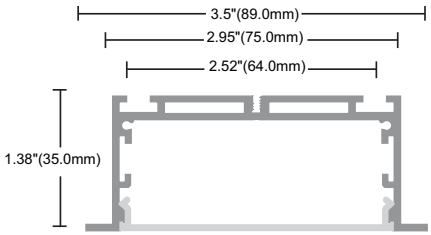

Silver Black White

·Installation method

PL116



End Caps



Mounting clips

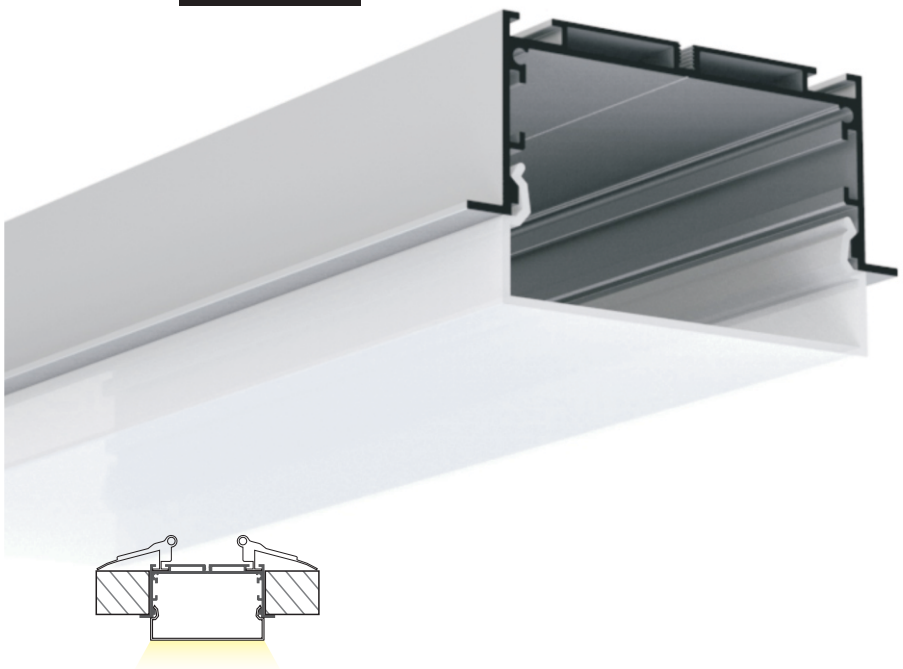

Cover: PC/Clear/Milky

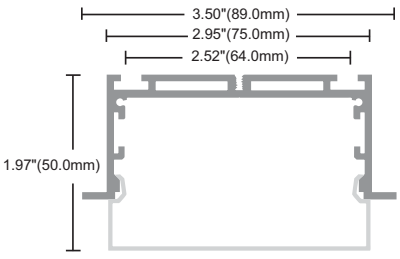

Silver Black White

·Installation method

PL238

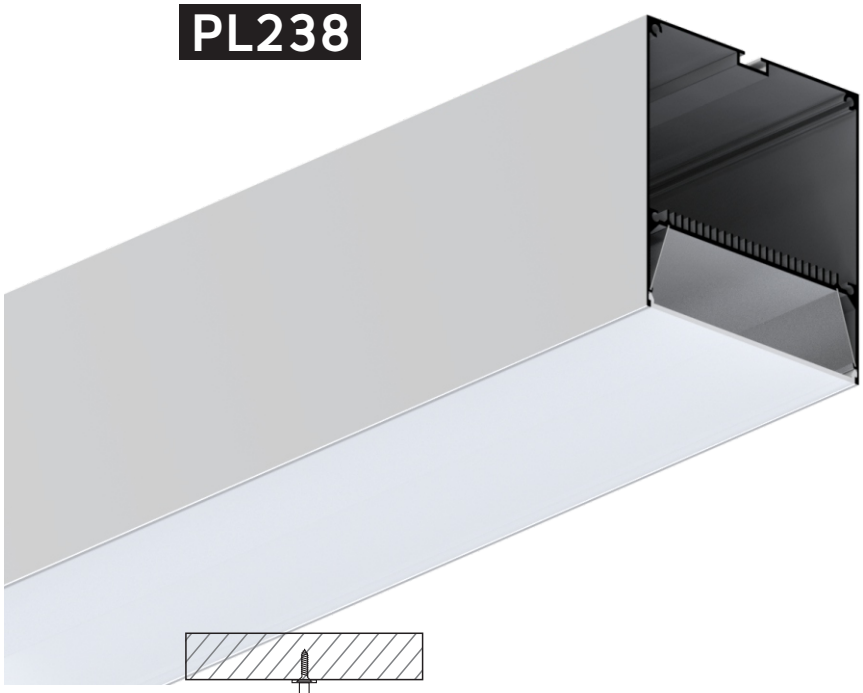



End Caps



Suspension wire





·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL003



End Caps



Suspension wire



180° joining connector



90° joining connector

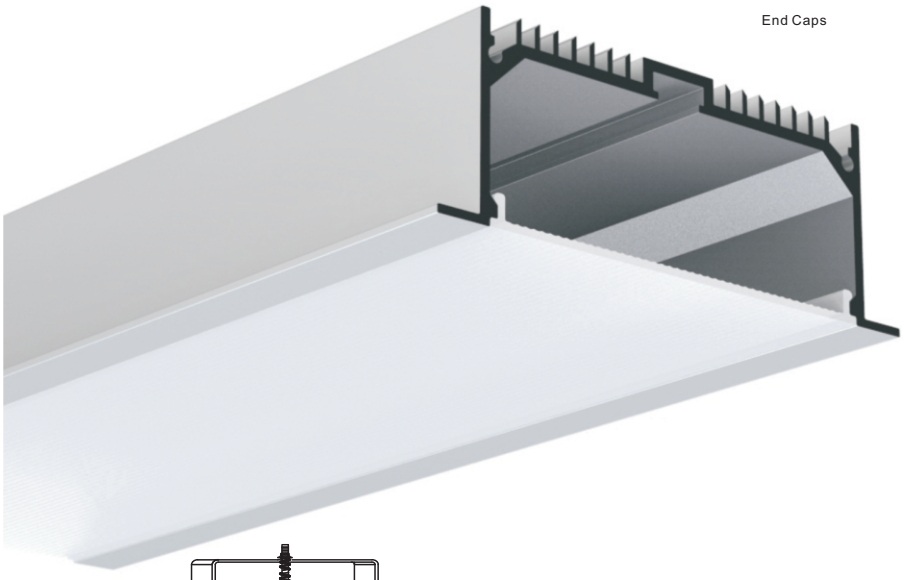

Cover: PC/Clear/Milky

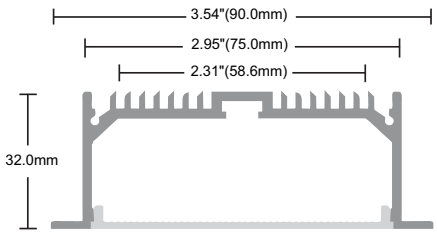

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

Sort by Product width

PL013


End Caps


Mounting clips


180° joining connector


90° joining connector



Cover: PC/Clear/Milky

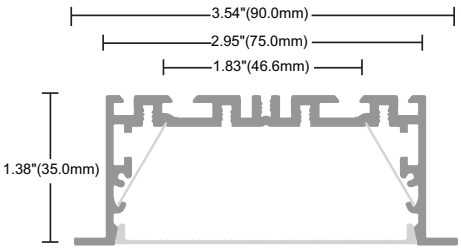

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

Sort by Product width

PL013U


End Caps


Suspension wire


180° joining connector


90° joining connector

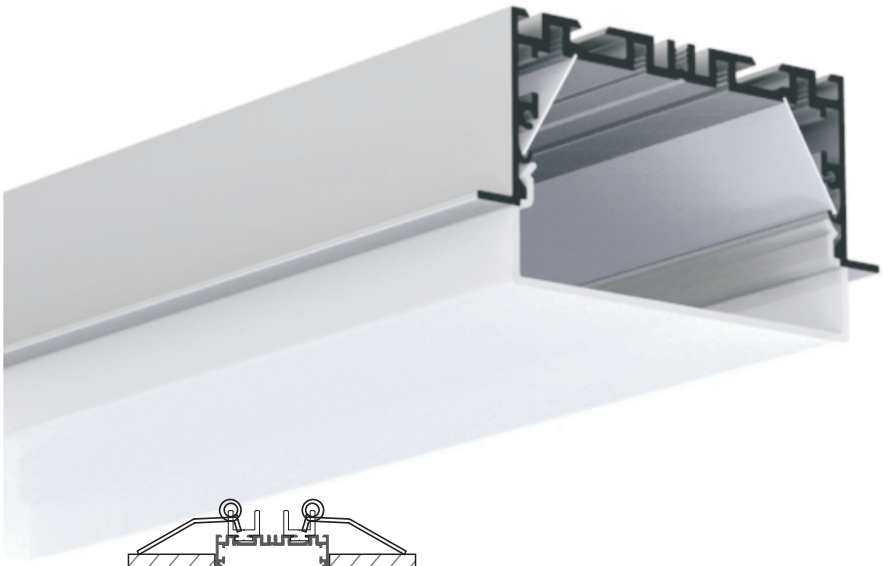

Cover: PC/Clear/Milky

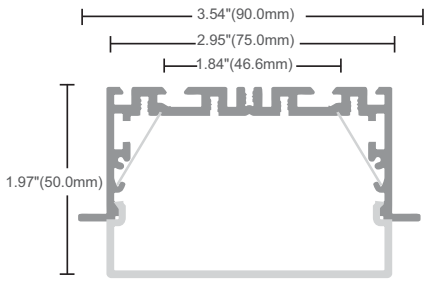

Silver Black White


·Installation method

Sort by Product width

PL062

Silver Black White



End Caps



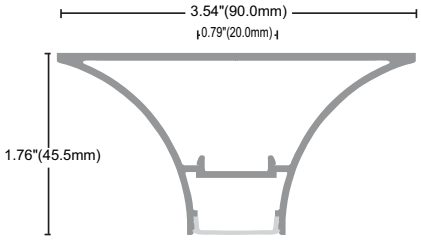



·Installation method

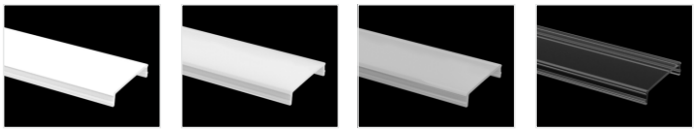

PMMA Opal PC Milky PC Frosted PC Clear

PL122

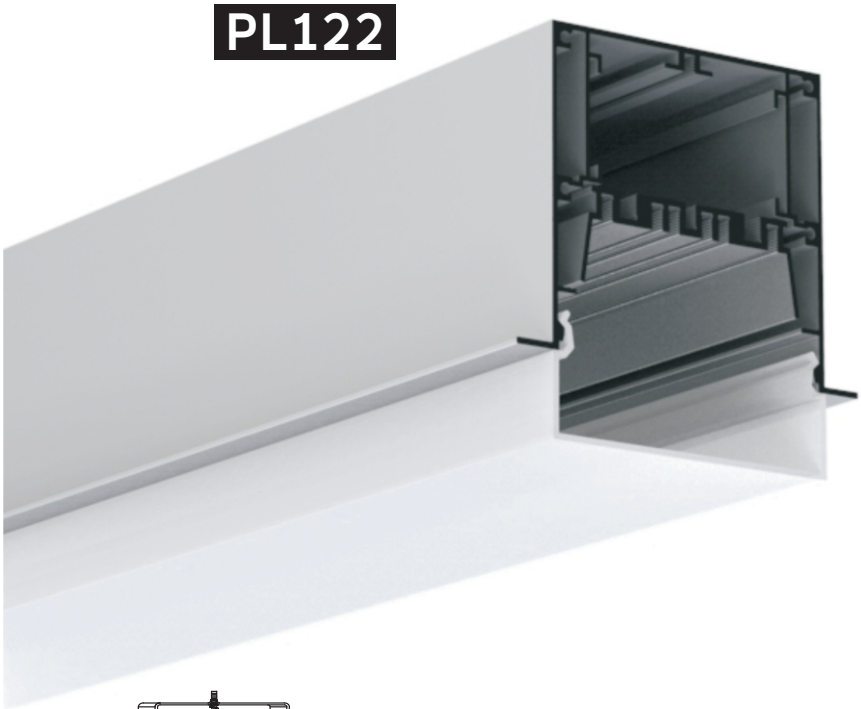



End Caps Mounting clips

Cover: PC/Clear/Milky

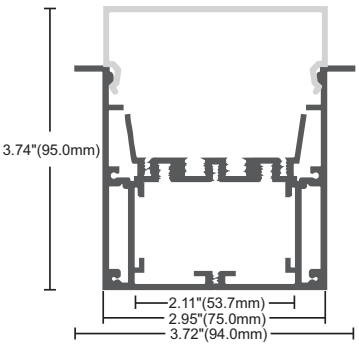

Silver Black White



·Installation method

PL123

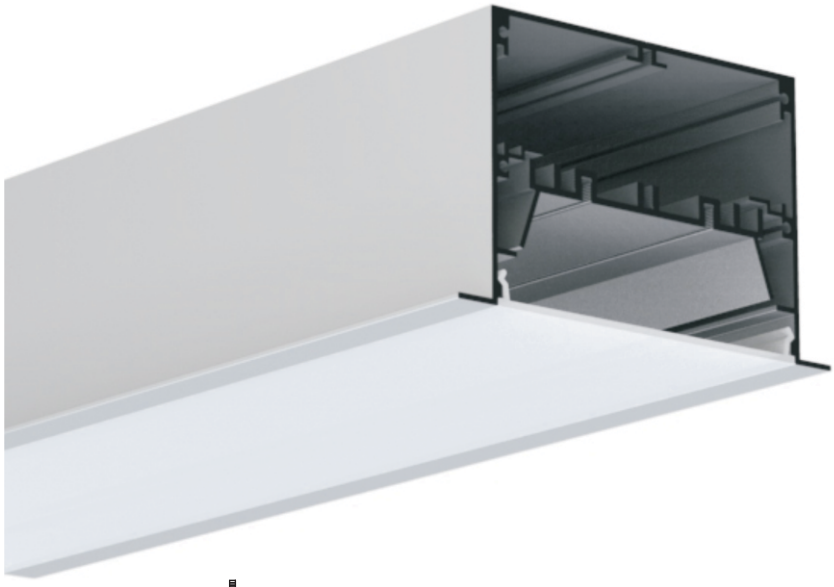



·Installation method



End Caps



Metallic mounting clips



Mounting clips

Cover: PC/Clear/Milky

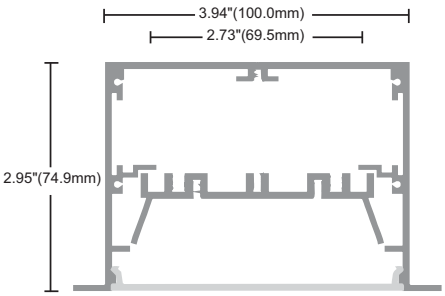

Silver Black White

PL124

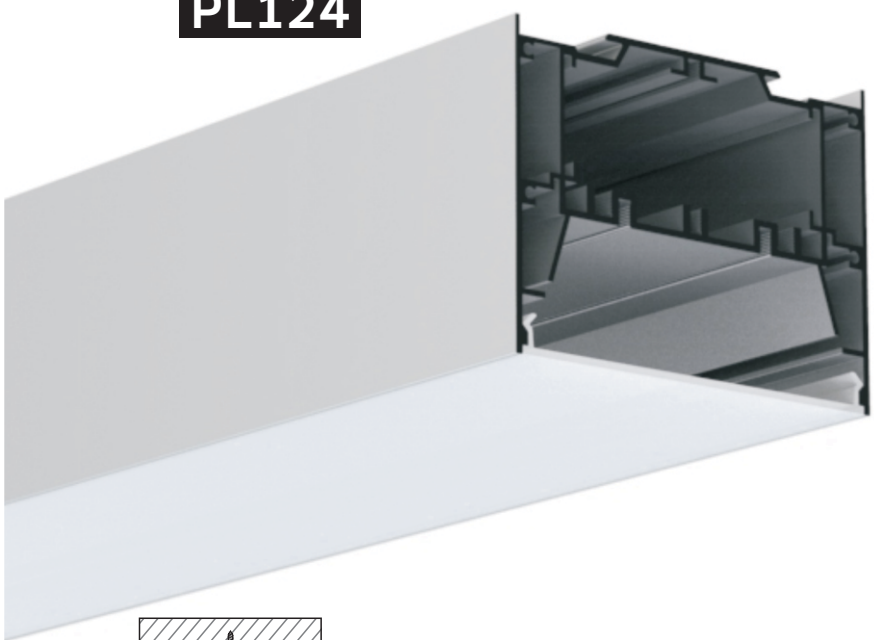



·Installation method



End Caps



Metallic mounting clips

Cover: PC/Clear/Milky

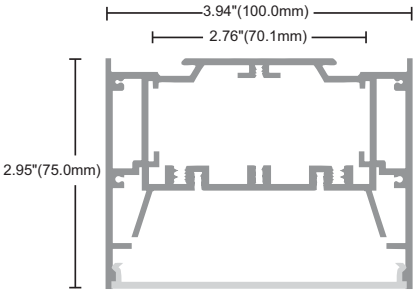

Silver Black White

PL009


End Caps


Endcap connect plate


180° joining connector


90° joining connector


Suspension wire

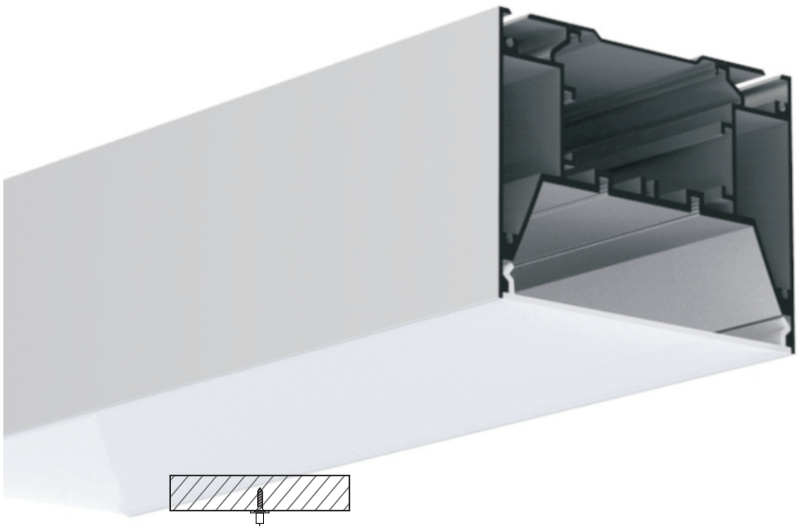

Cover: PC/Clear/Milky

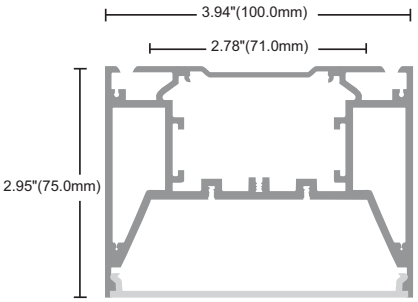

Silver Black White


·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL239

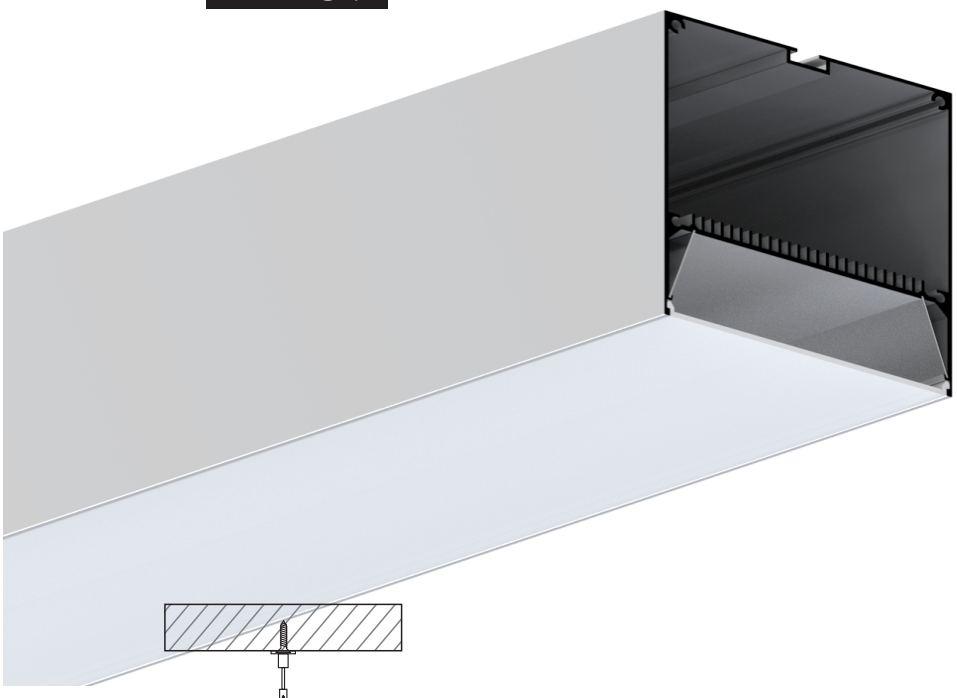


End Caps


Suspension wire




·Installation method


PMMA Opal


PC Milky


PC Frosted


PC Clear

PL069



End Caps

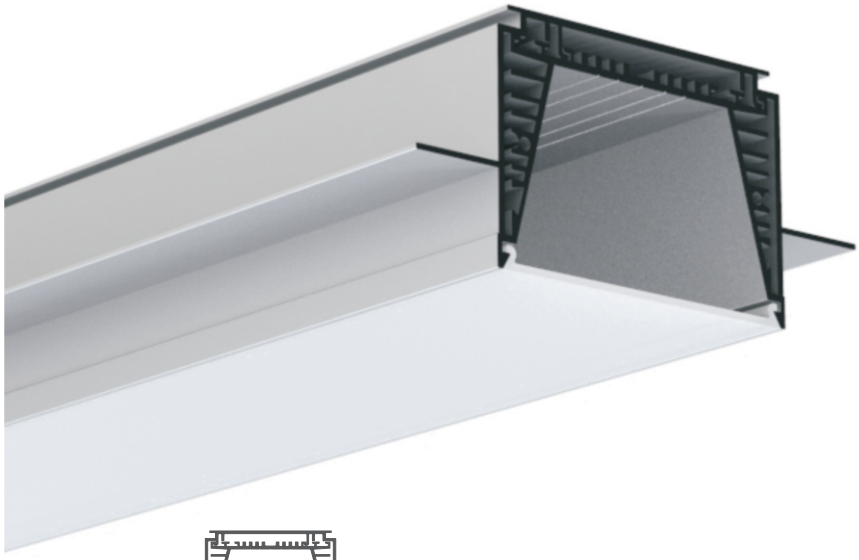

Cover: PC/Clear/Milky

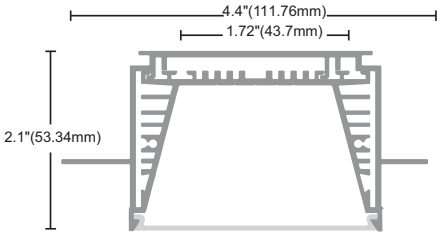

Silver Black White



·Installation method



PMMA Opal



PC Milky



PC Frosted



PC Clear

PL113



End Caps



Mounting clips

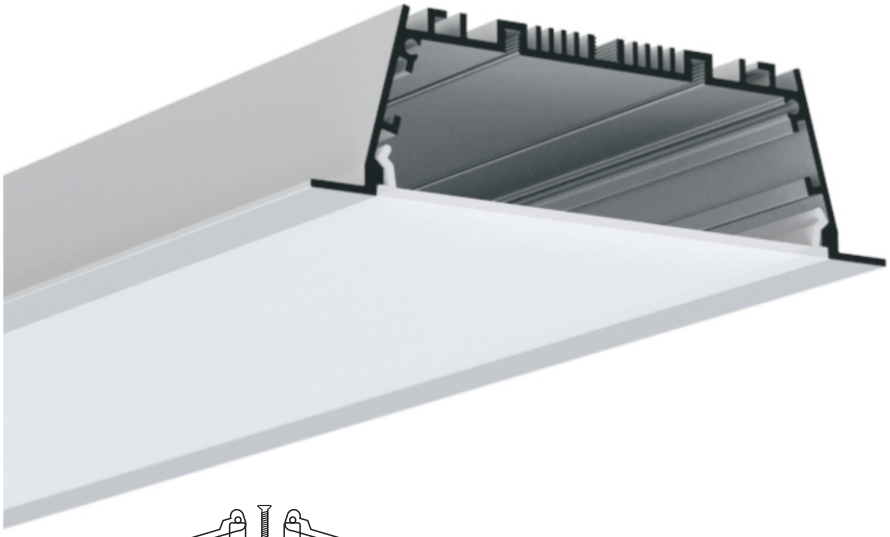

Cover: PC/Clear/Milky

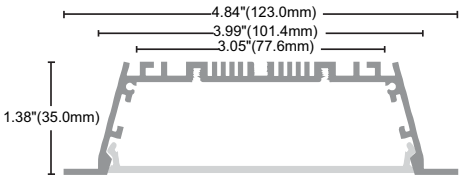

Silver Black White



·Installation method

LED tube pendant light

PL173

Silver Black White

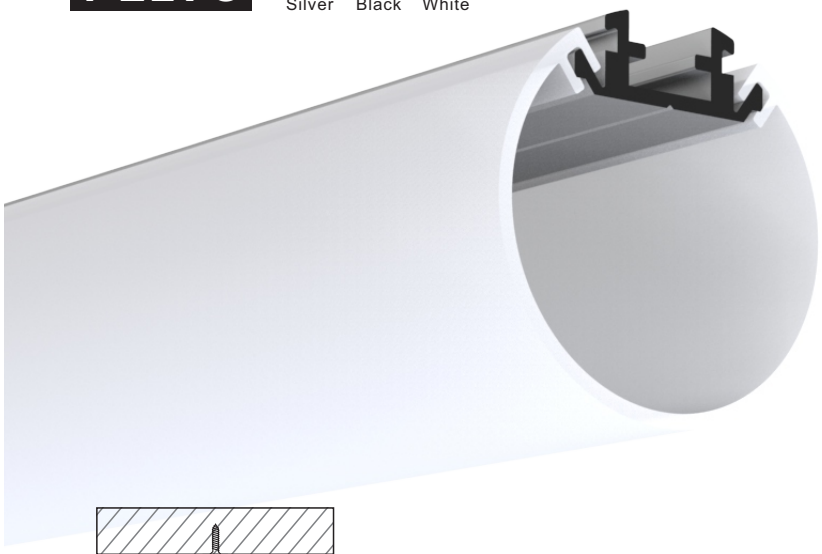



End Caps



Suspension wire

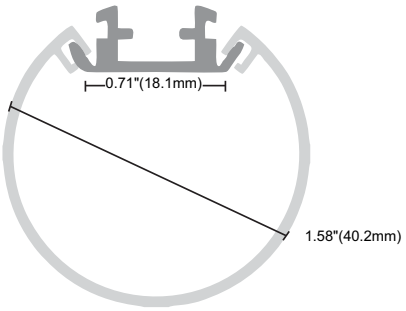



·Installation method

PL174

Silver Black White

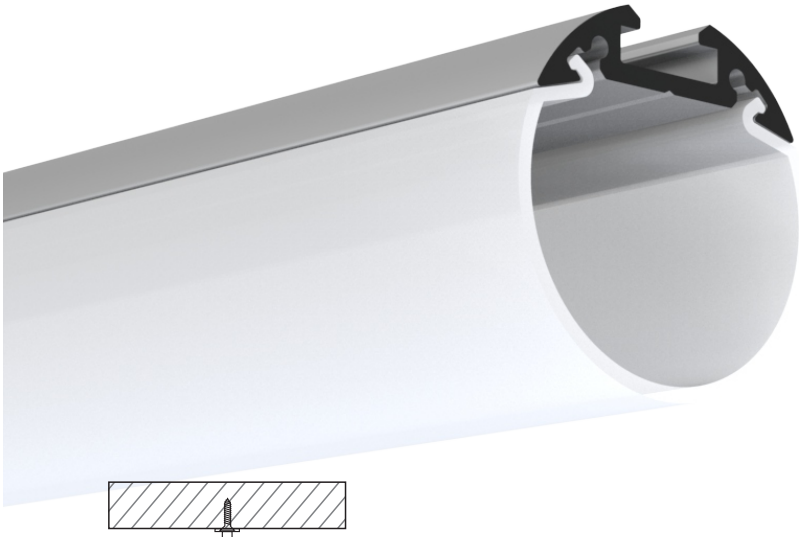



End Caps



Suspension wire

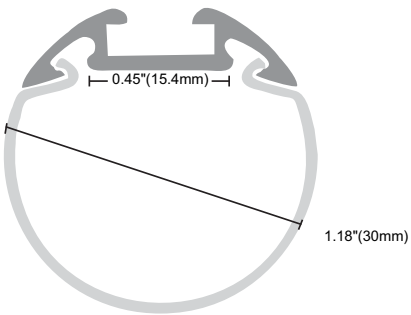



·Installation method

LED tube pendant light

HW-82

Silver Black White





·Installation method



End Caps



Suspension wire



Sort by Product width

PL071

Silver Black White





·Installation method



End Caps



Suspension wire



LED TUBE PENDANT LIGHT

PL072

Silver Black White





End Caps



Suspension wire



·Installation method

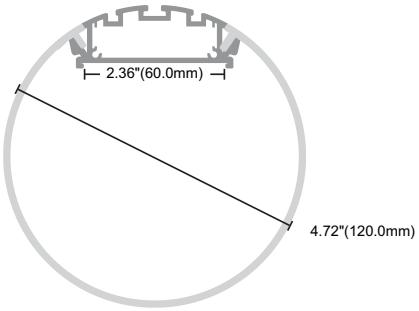

Sort by Product width

FREE COMBINATION PRODUCTS

PL185A

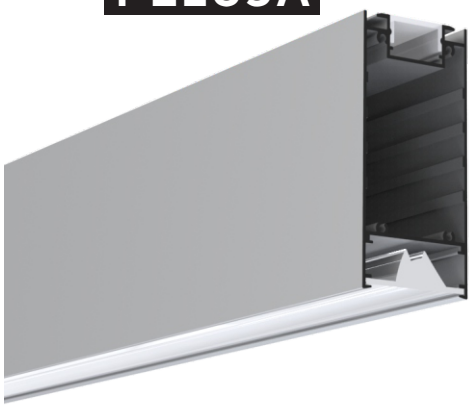

Types of Installatlon:



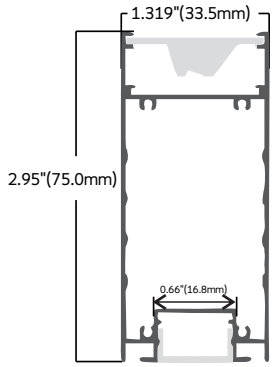

Profile color

Black Silver White

Luminous angle:Single Bias45°

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Mounting clip 

Suspension wire 

Structure Image

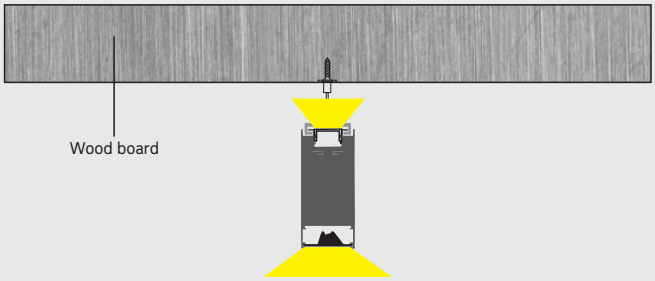

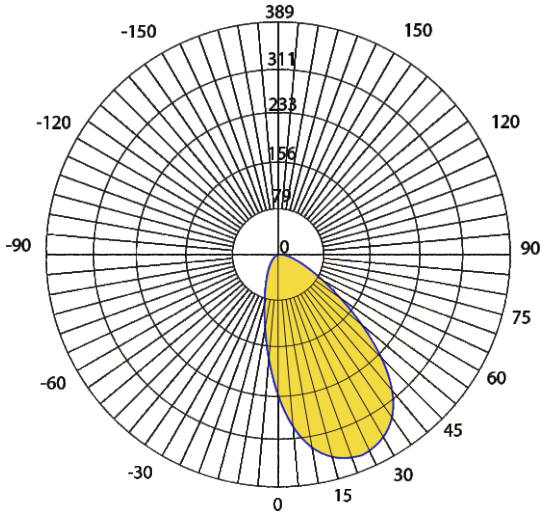

FREE COMBINATION PRODUCTS

PL185B



Types of Installatlon:



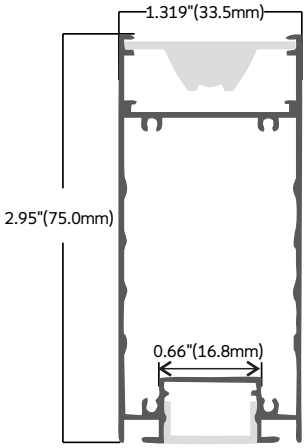

Luminous angle:40°

Profile color

Black Silver White

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Mounting clip 

Suspension wire 

Structure Image

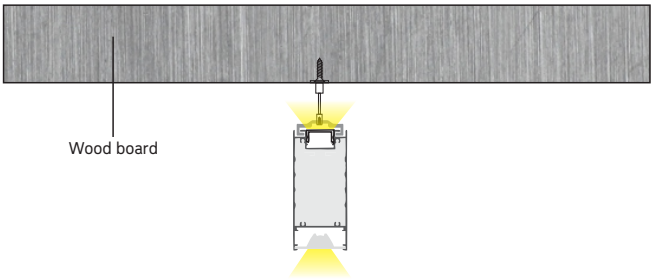

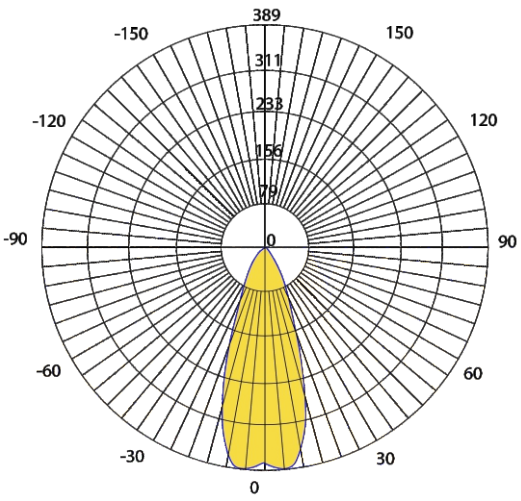

FREE COMBINATION PRODUCTS

PL185C

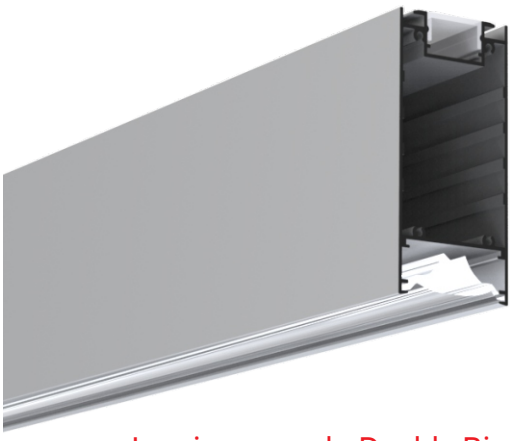

Types of Installatlon:



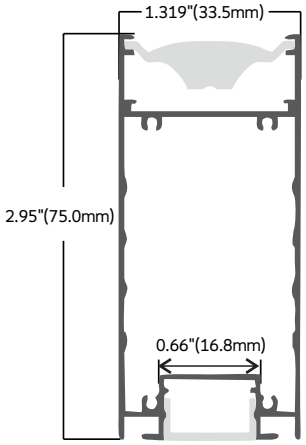

Profile color

Black Silver White

Luminous angle:Double Bias 80° /90°

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Suspension wire



Structure Image

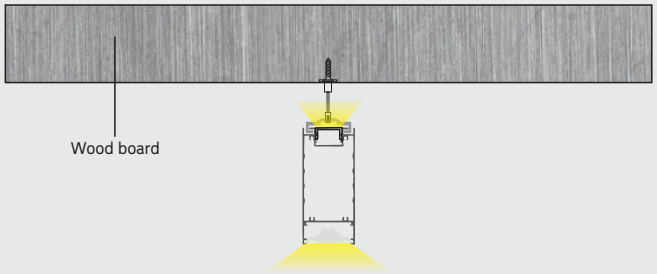

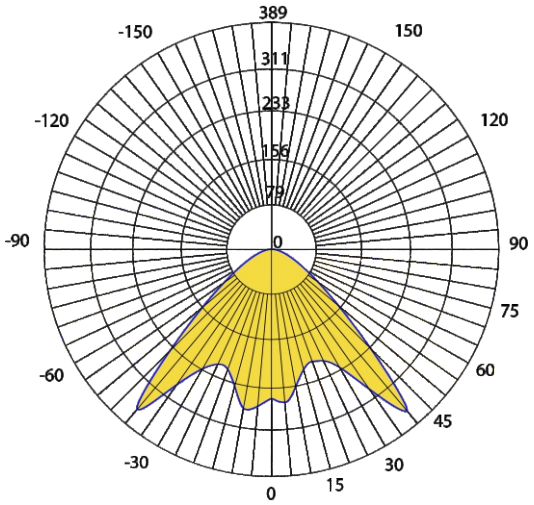

FREE COMBINATION PRODUCTS

PL185D

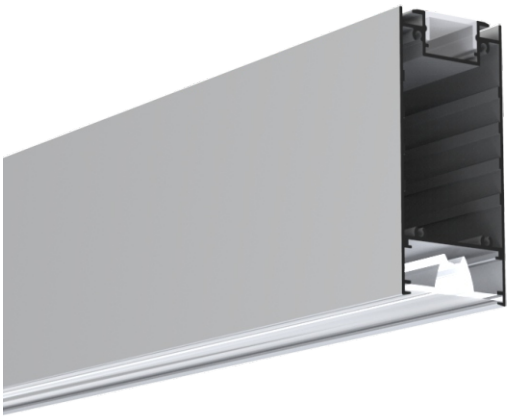

Types of Installatlon:



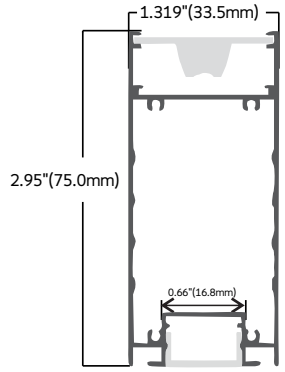

Profile color

Black Silver White

Luminous angle:Double Bias 45° 90°

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Mounting clip 

Suspension wire 

Structure Image

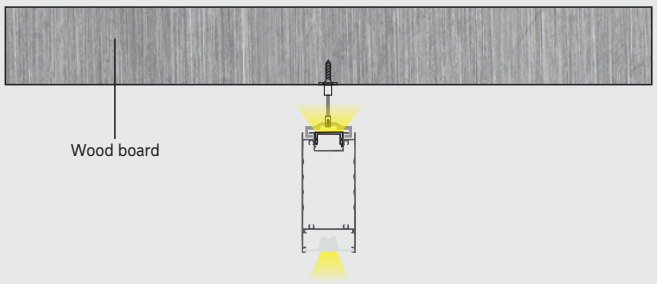

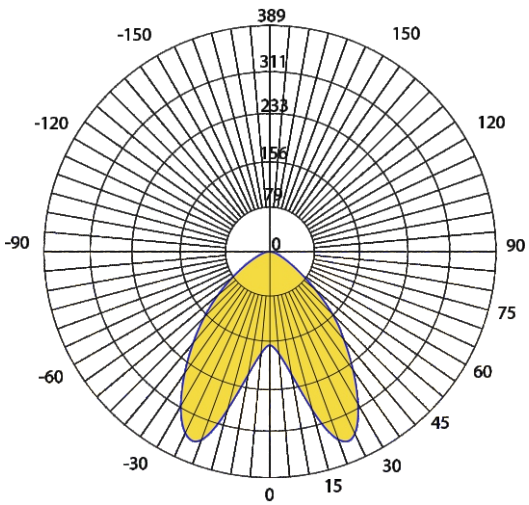

FREE COMBINATION PRODUCTS

PL185E

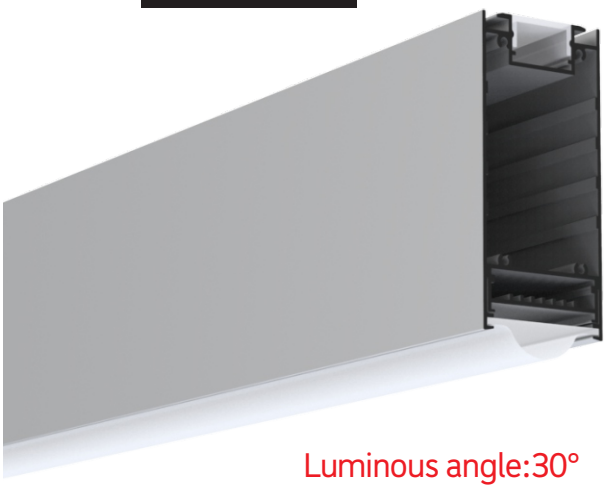

Luminous angle:30°

Types of Installatlon:



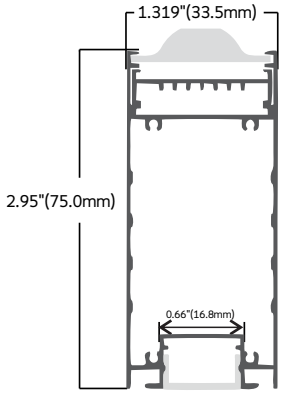

Profile color

Black Silver White

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Mounting clip 

Suspension wire 

Structure Image

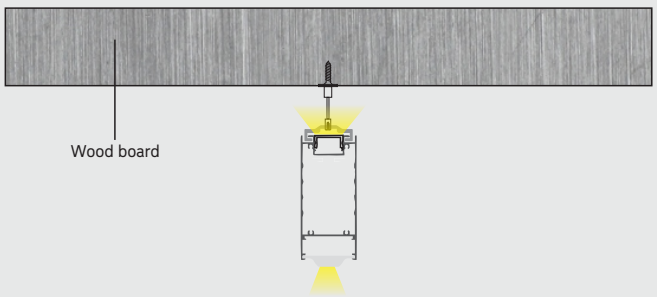

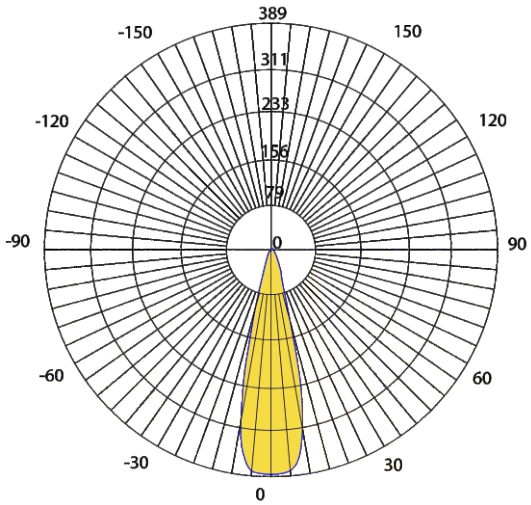

FREE COMBINATION PRODUCTS

PL185F



Types of Installatlon:



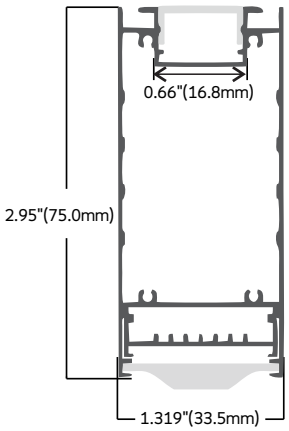

Profile color

Black Silver White

Luminous angle:60°

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap 

Mounting clip 

Suspension wire 

Structure Image

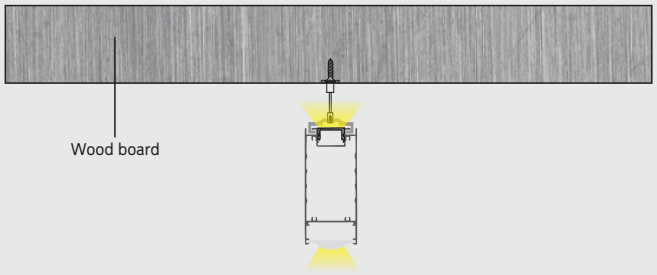

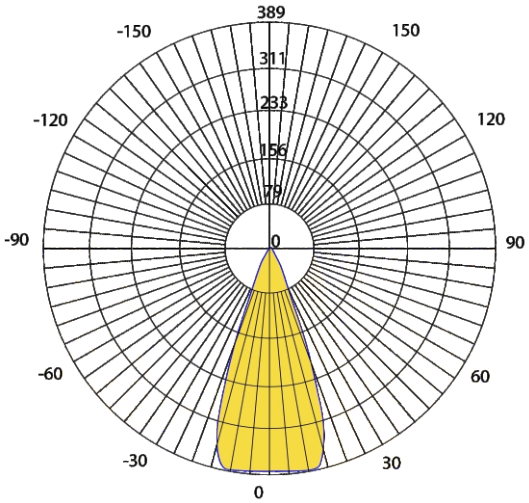

FREE COMBINATION PRODUCTS

PL185G

Types of Installatlon:





Luminous angle:90°

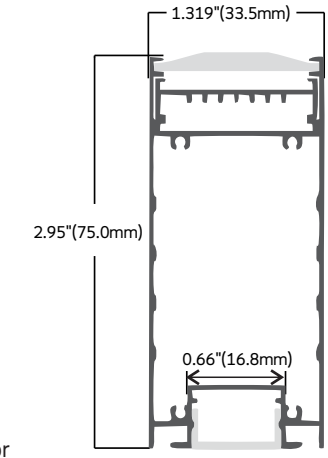

Profile color

Black Silver White

Profile Components



PMMA
lens

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Installation Accessories

End cap



Mounting clip



Suspension wire



Structure Image

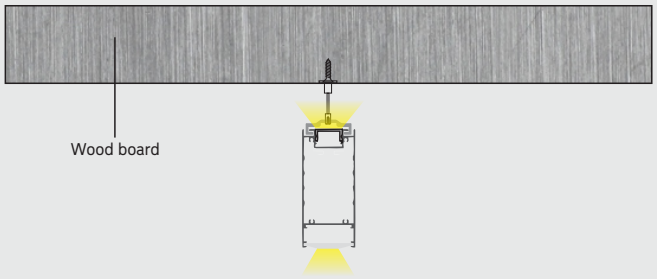

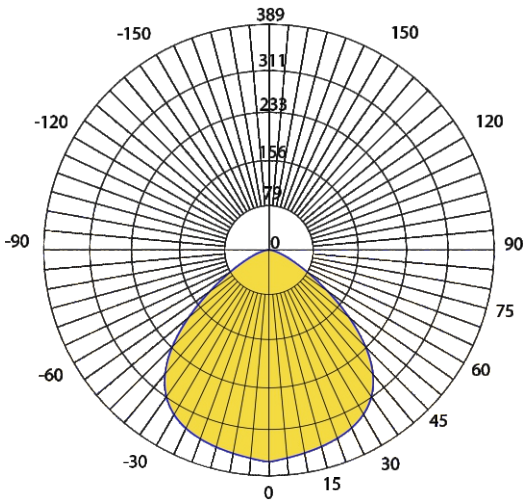

FREE COMBINATION PRODUCTS

PL101

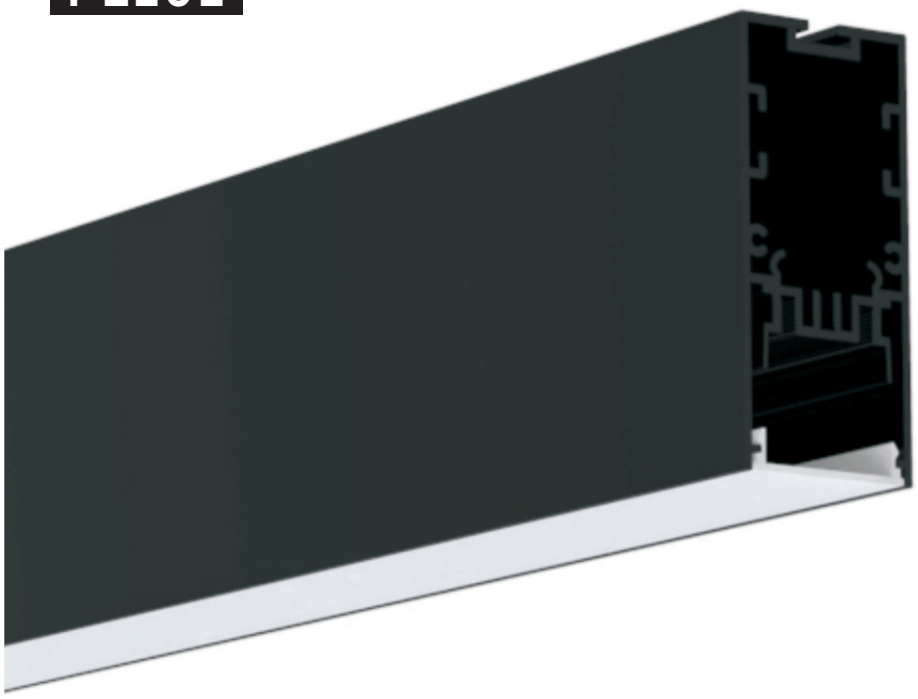

Cover: PC/Clear/Milky

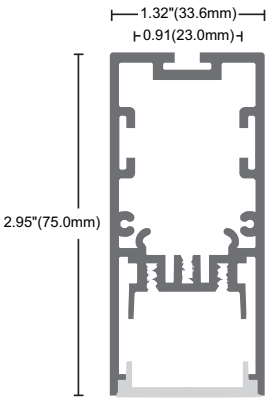

Silver Black White



·Installation method



CNC end caps without hole



Blind cover



reflector: 15°, 30°, 45°



PC frosted cover



Steel wire



High reflective louver



90 degrees connector



180 degrees connector



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL102

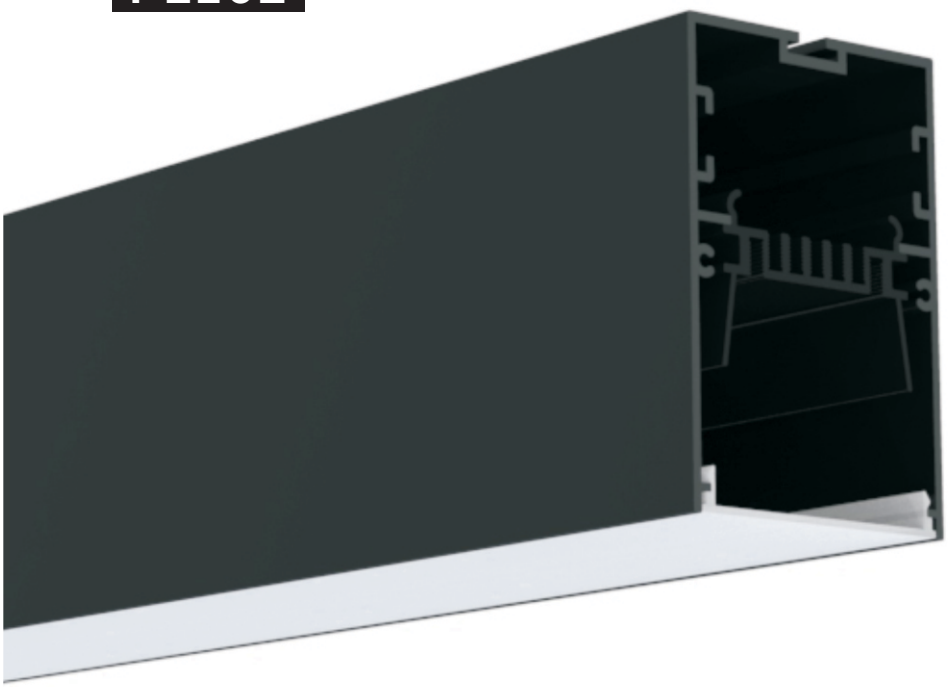

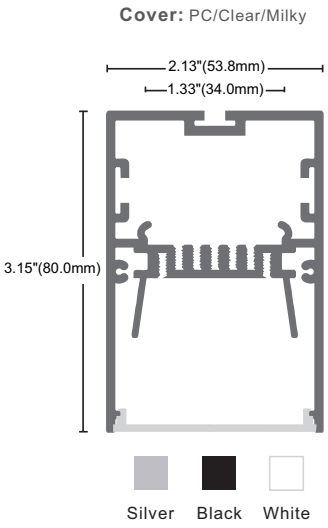



·Installation method



CNC end caps without hole



Blind cover



reflector: 15°, 30°, 45°



90 degrees connector



Steel wire



High reflective louver



PC frosted cover



180 degrees connector



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL101/PL102

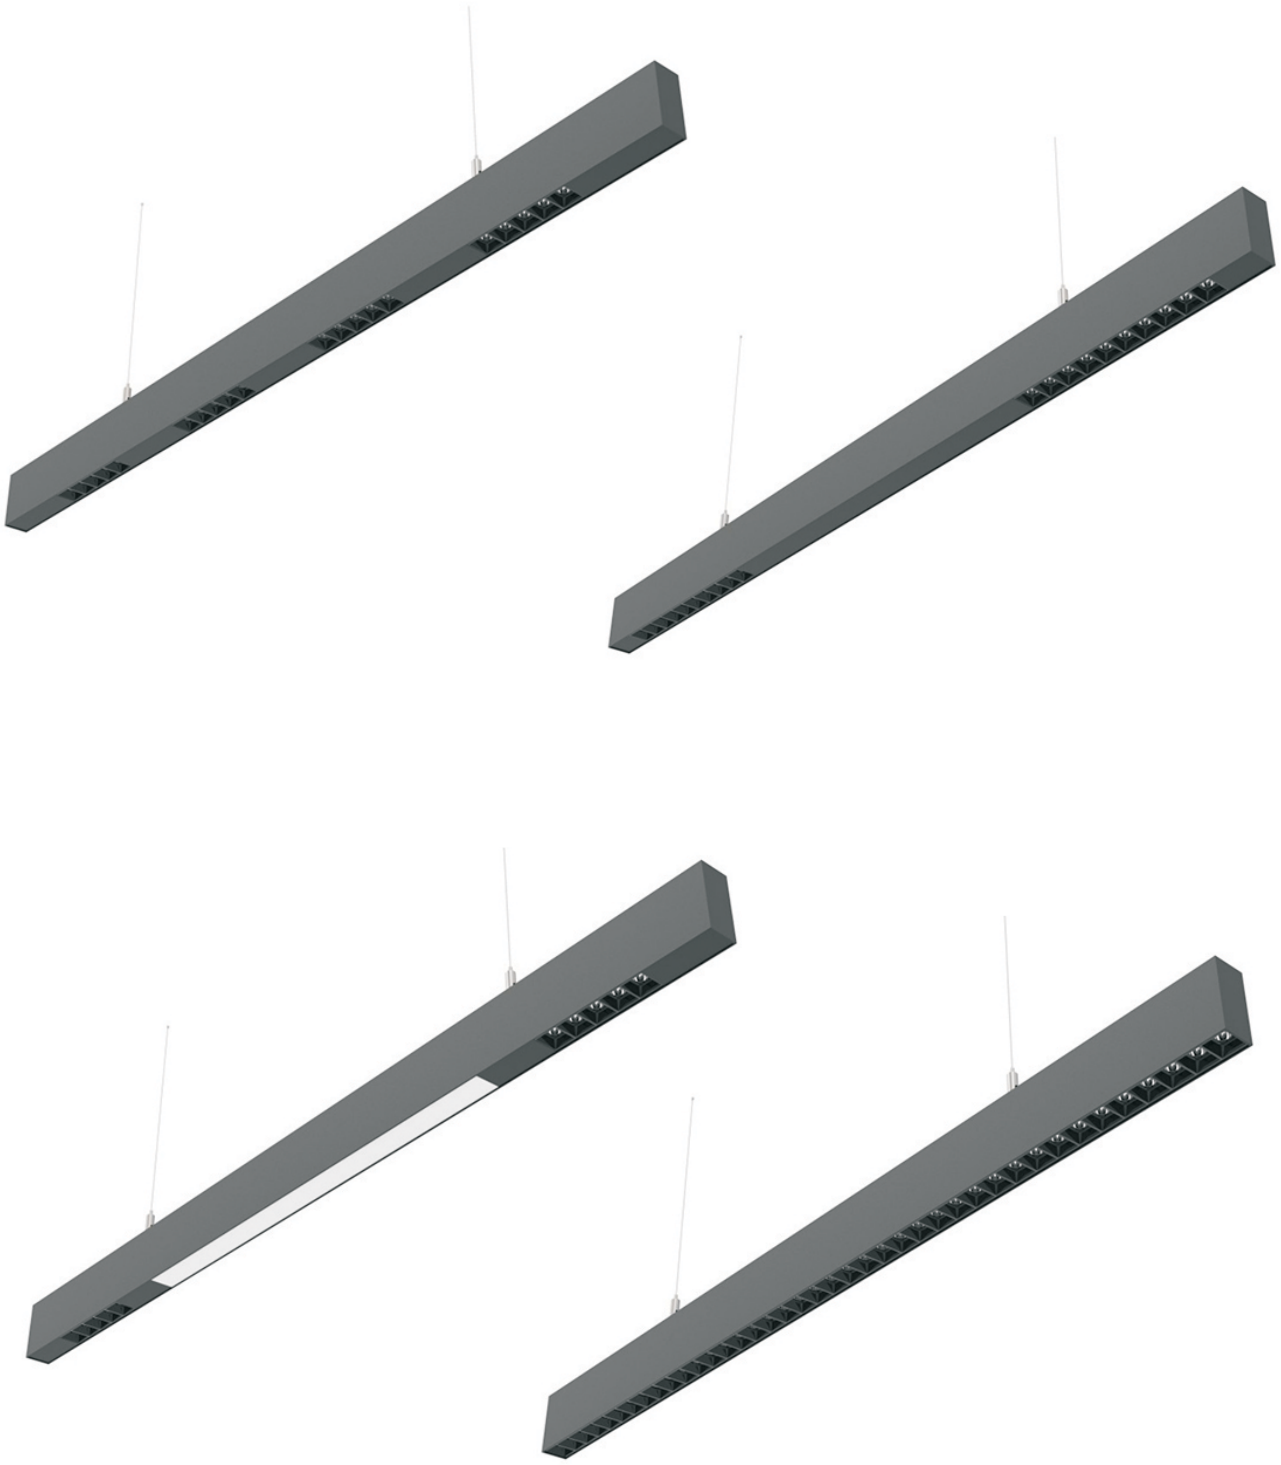



FREE COMBINATION PRODUCTS

PL160A

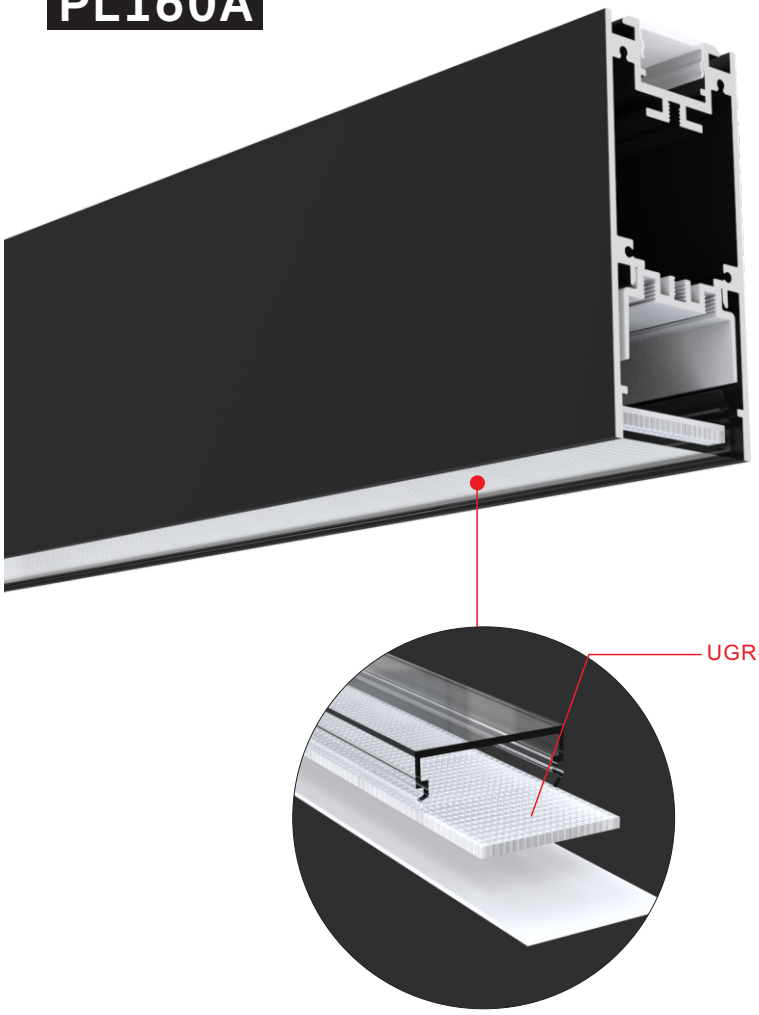



·Installation method

Cover: PC

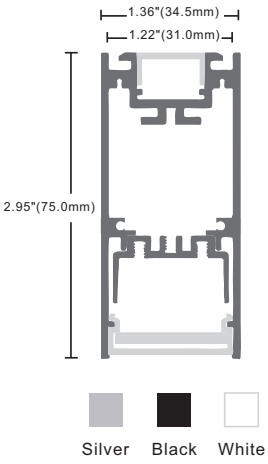

Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



Splicing piece



Light board



Power supply

FREE COMBINATION PRODUCTS

PL160B

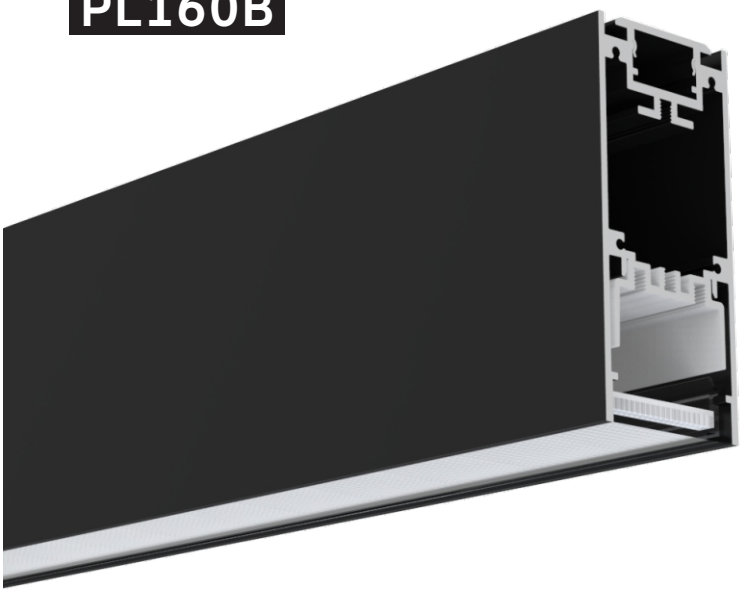

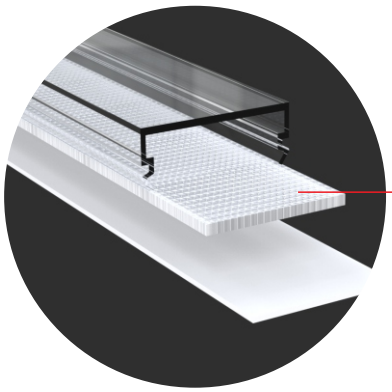

Cover: PC

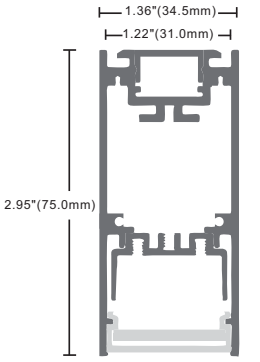

Silver Black White



·Installation method



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



Splicing piece



Light board



Power supply



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL160C

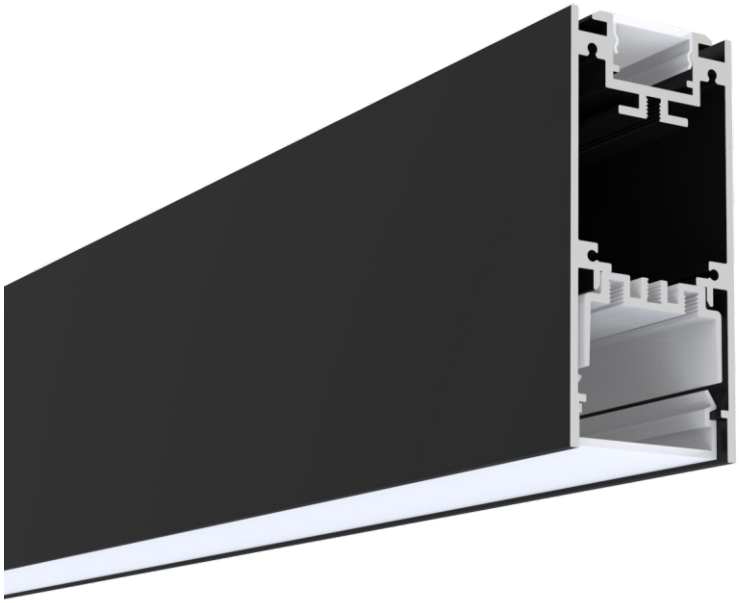



·Installation method

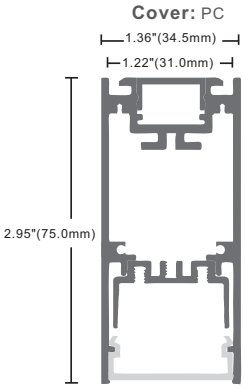

Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



Splicing piece



Light board



Power supply



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL160D

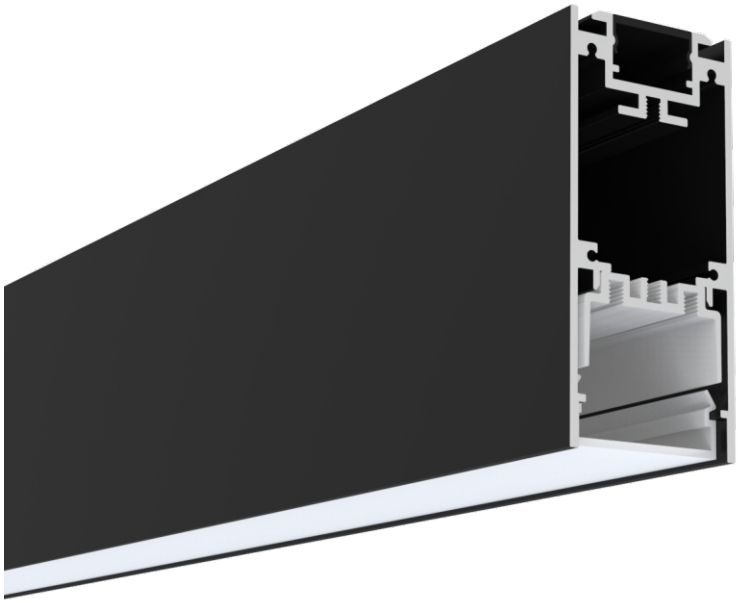



Cover: PC

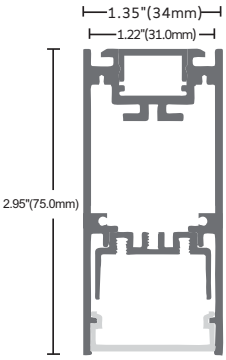

Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



Splicing piece



Light board



Power supply



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL160E

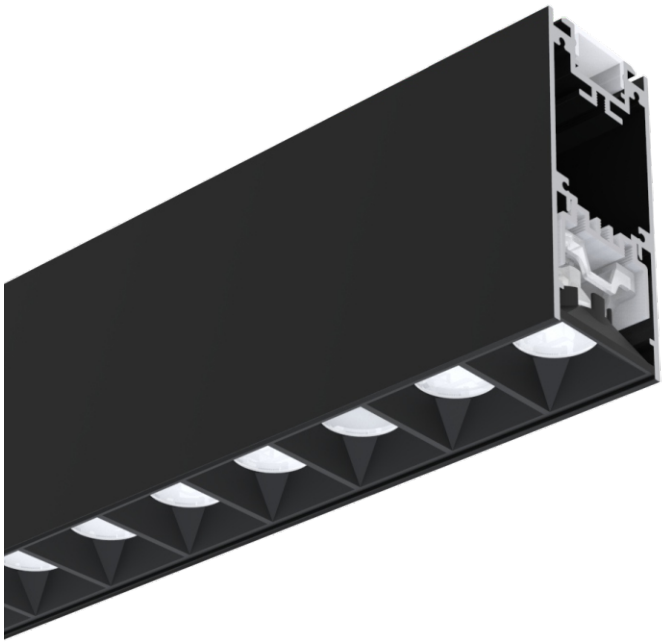

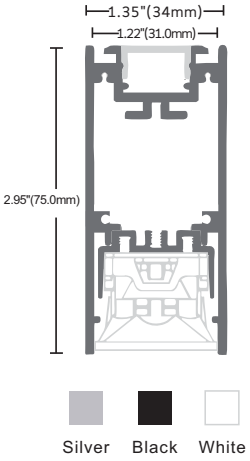

·Installation method

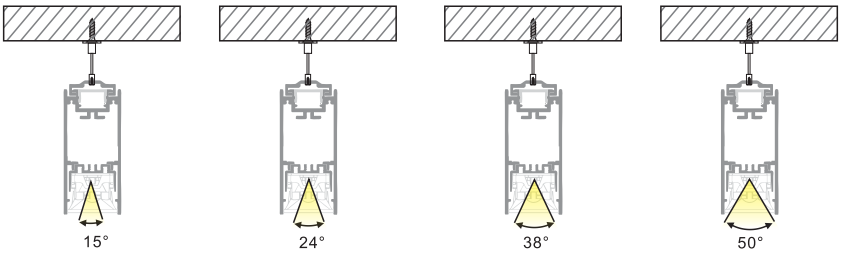



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



Splicing piece



Light board



Power supply

FREE COMBINATION PRODUCTS

PL160F

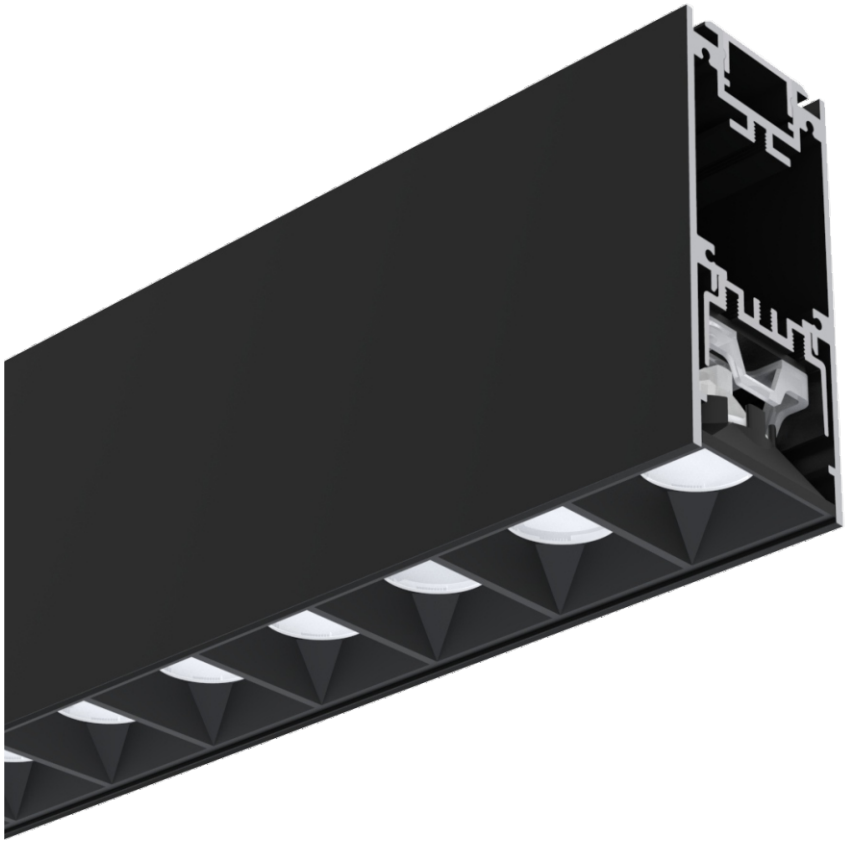

·Installation method

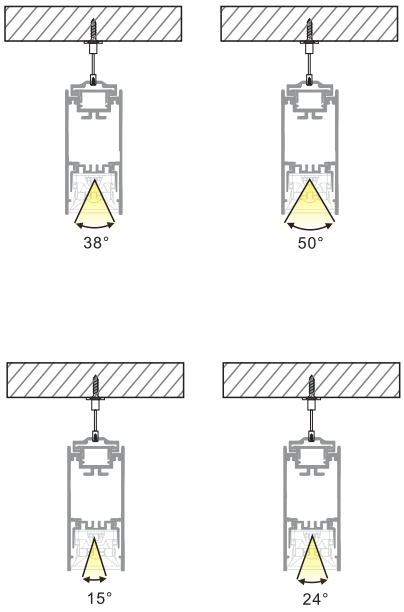



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



Splicing piece



Power supply



Light board



Metallic clips

Cover: PC

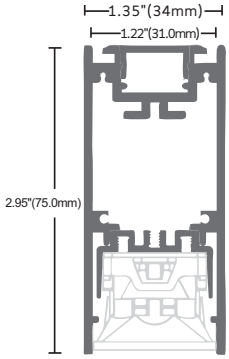

Silver Black White

FREE COMBINATION PRODUCTS

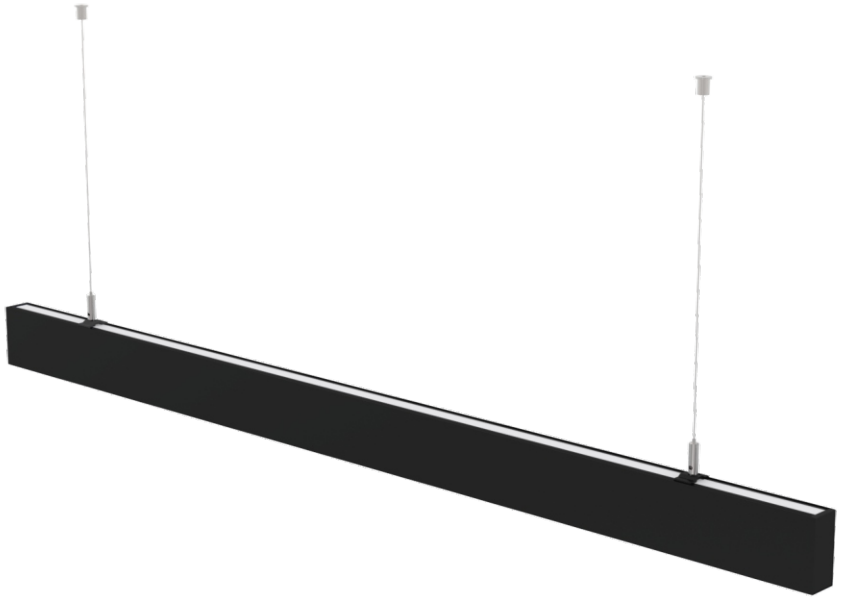

PL160A/PL160C/PL160E

(double-side illuminated)



PL160B

(Single side illuminated)

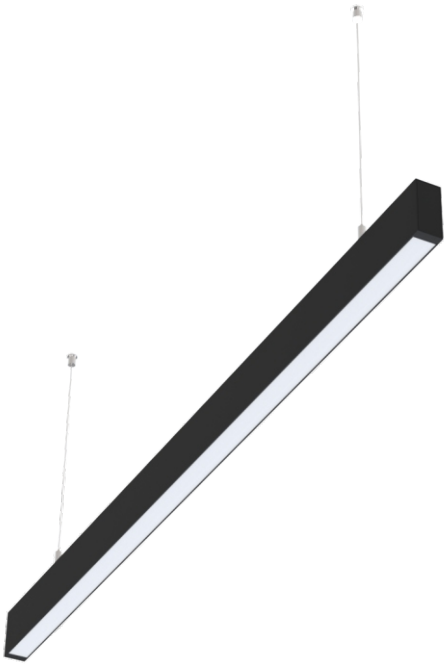

PL160D

(Single side illuminated)

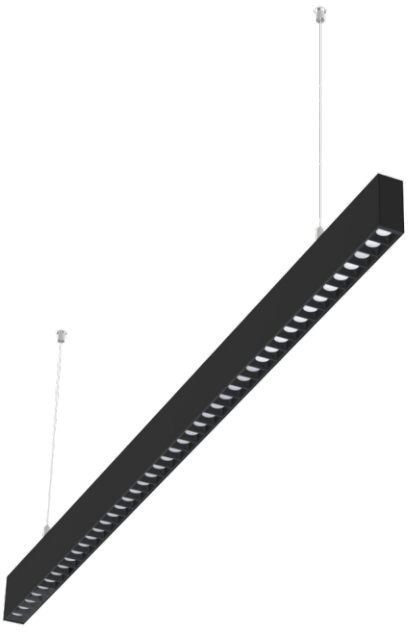

PL161F

(Single side illuminated)



FREE COMBINATION PRODUCTS

PL161

Free combination

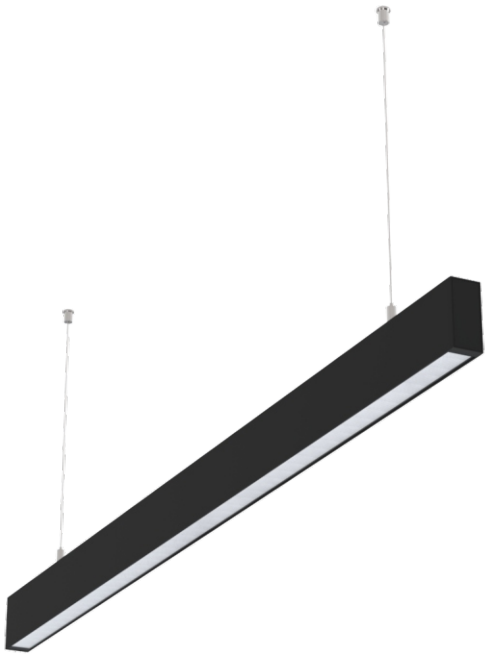

PL161A

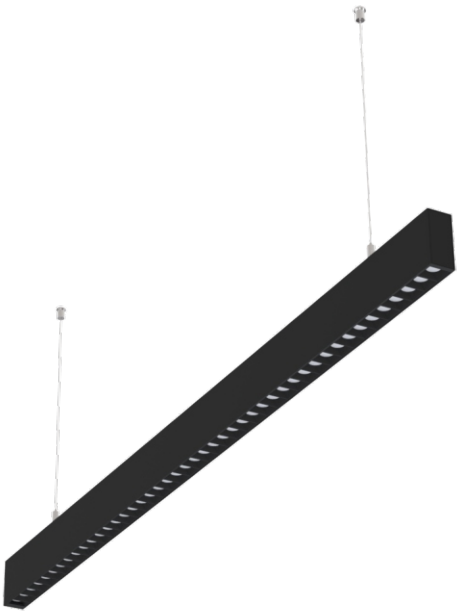

PL161C

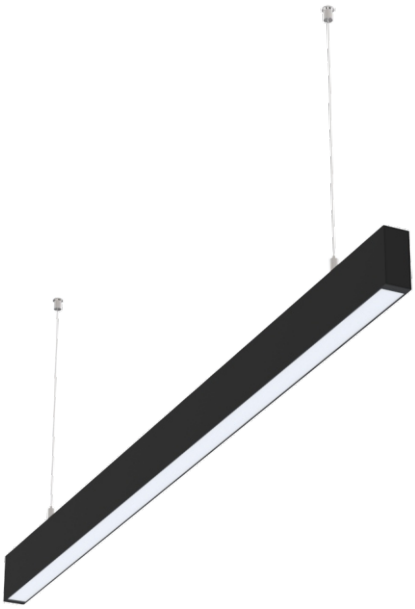

PL161B

FREE COMBINATION PRODUCTS

PL161A

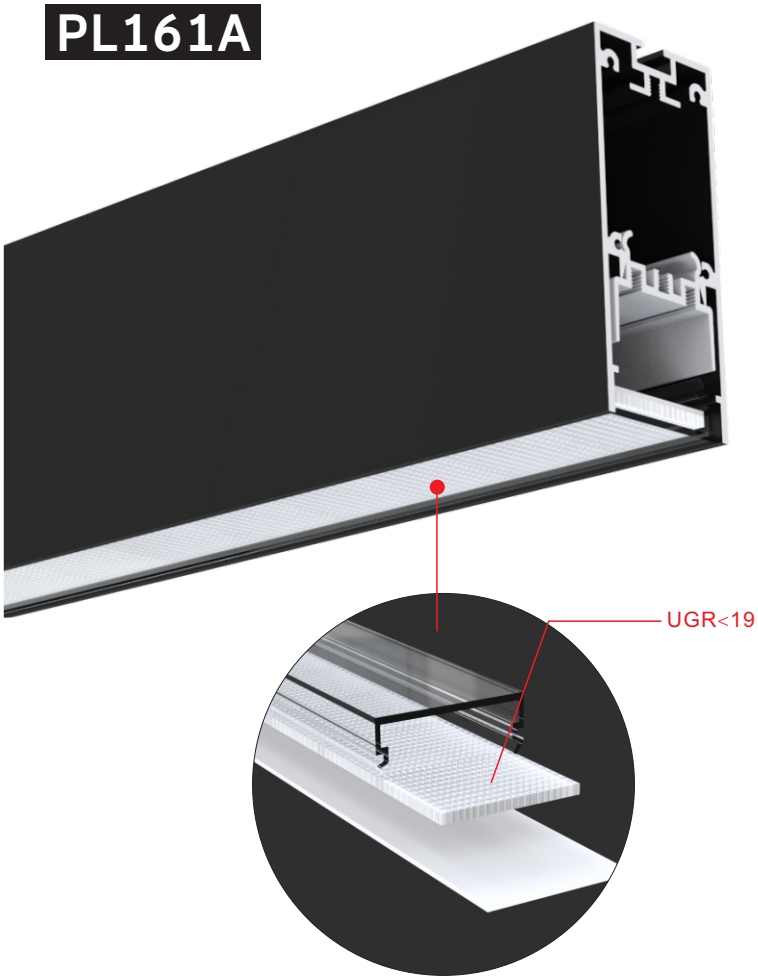



·Installation method

Cover: PC

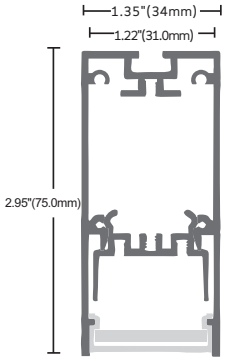

Silver Black White



Black silicone strip



Safety rope



Suspension wire



Splicing piece



Light board



Power supply

FREE COMBINATION PRODUCTS

PL161B

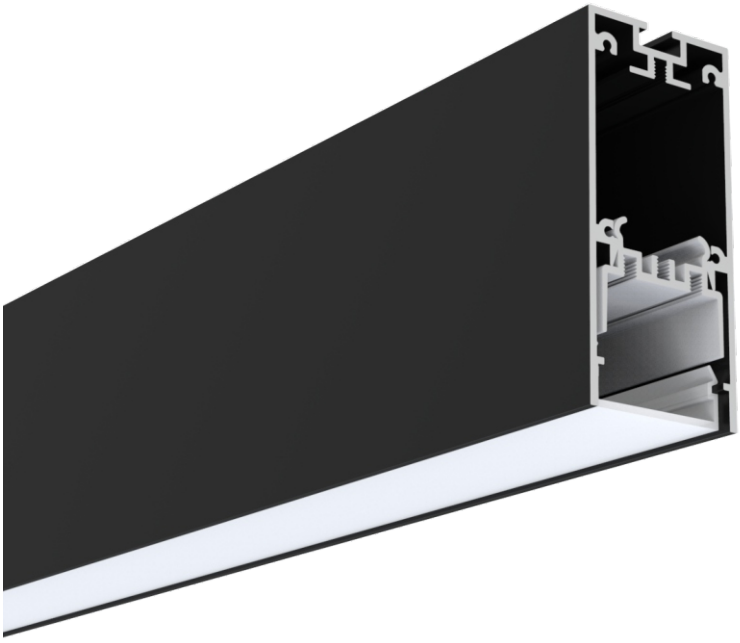



·Installation method

Cover: PC

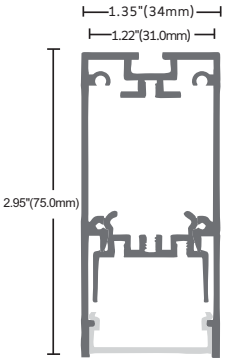

Silver Black White



Black silicone strip



Safety rope



Suspension wire



Splicing piece



Light board



Power supply



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL161C

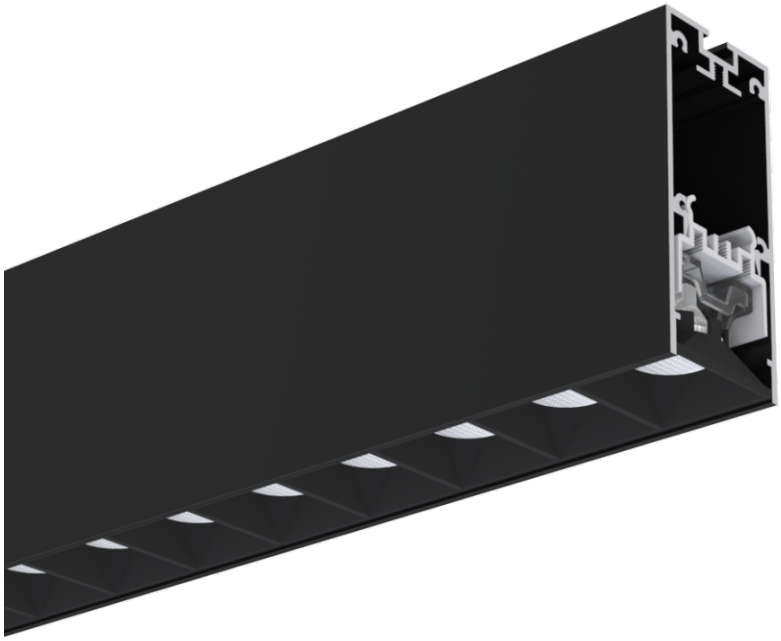

Cover: PC

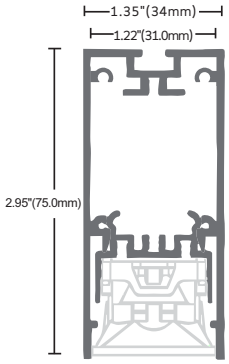

Silver Black White

·Installation method

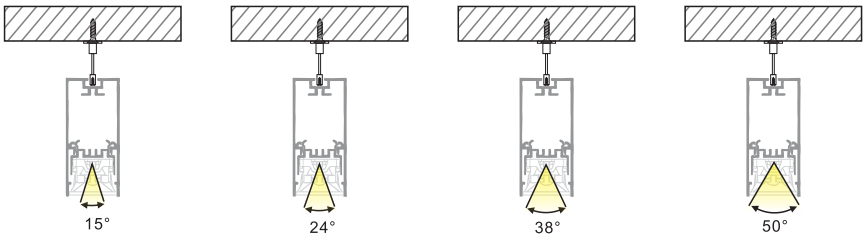



Black silicone strip



Safety rope



Suspension wire



Splicing piece



Light board



Power supply

FREE COMBINATION PRODUCTS

PL201A

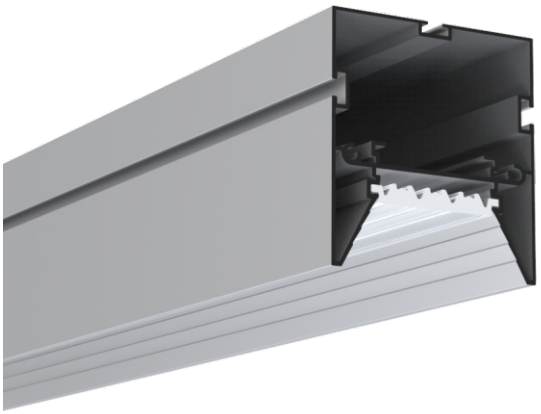

Luminous angle:75°

Types of Installatlon:



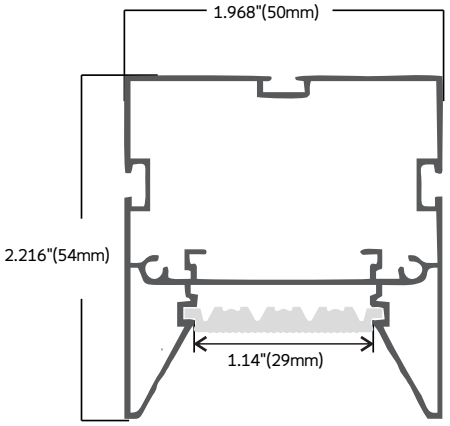

Profile color

Black Silver White

Profile Components



PMMA
lens

Installation Accessories

End cap	
Suspension wire	

Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

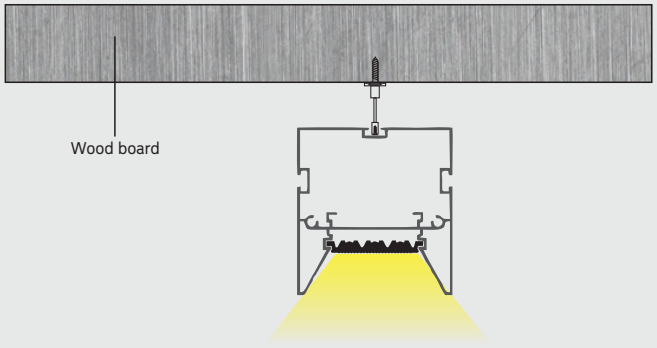

FREE COMBINATION PRODUCTS

PL201B



Luminous angle:30°

Types of Installatlon:



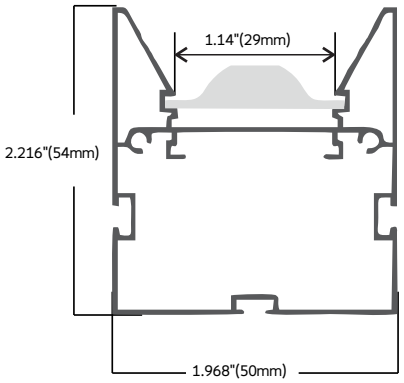

Profile color

Black Silver White

Profile Components



PMMA
lens

Installation Accessories

End cap



Suspension wire



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

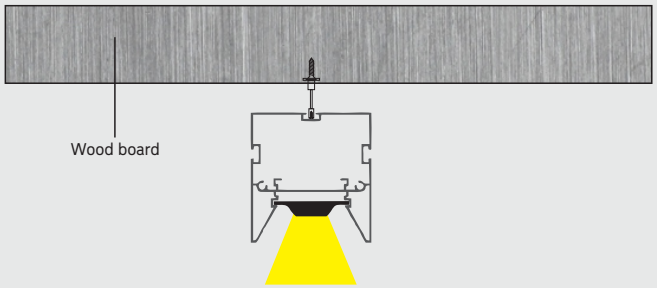

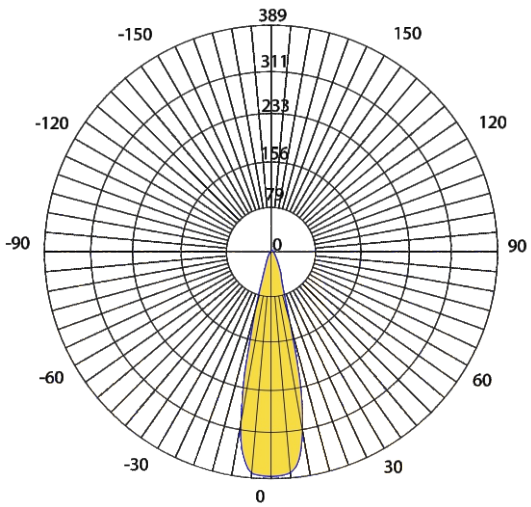

FREE COMBINATION PRODUCTS

PL201C

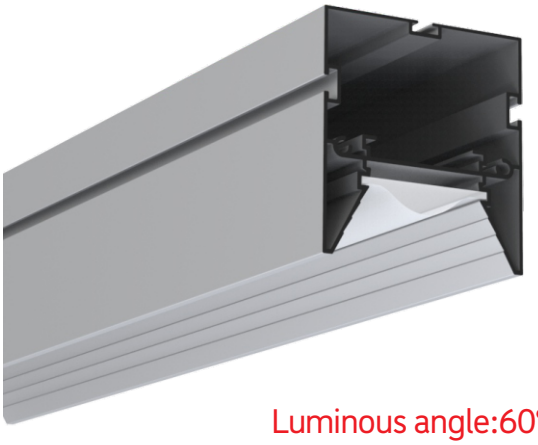

Luminous angle:60°

Types of Installatlon:



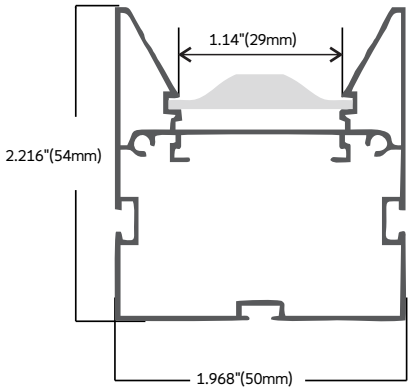

Profile color

Black Silver White

Profile Components



PMMA
lens

Installation Accessories

End cap



Suspension wire



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

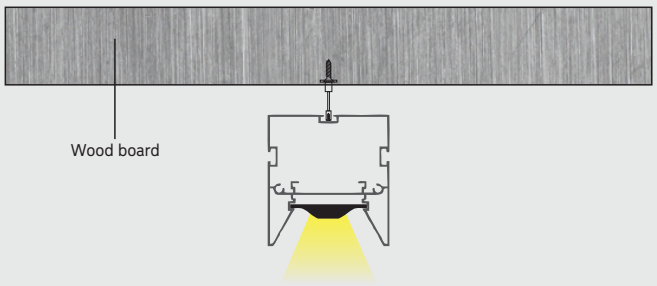

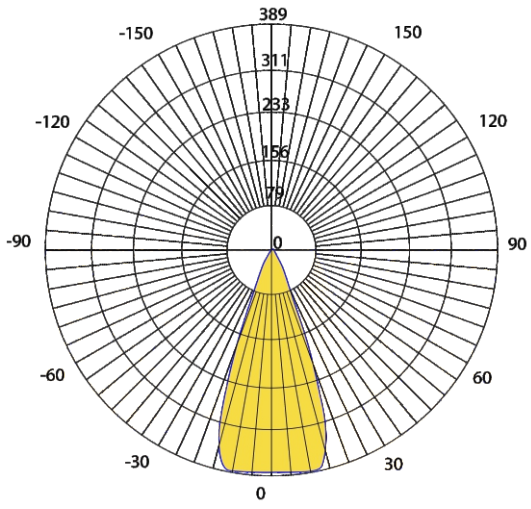

FREE COMBINATION PRODUCTS

PL201D

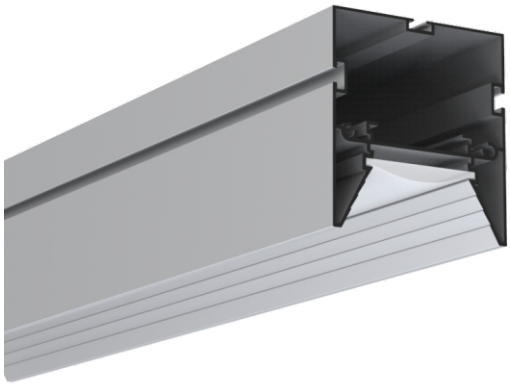

Types of Installatlon:



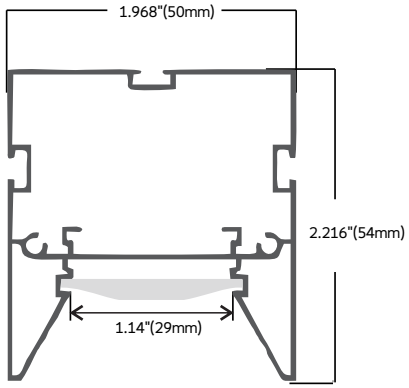

Profile color

Black Silver White

Luminous angle:90°

Profile Components



PMMA
lens

Installation Accessories

End cap



Suspension wire



Basic parameters

Standard Length	1M/2M/3M (MAX 6M)
Installation Method	Suspended Mount
Material	AL6063-T5
Surface Treatment	Silver Anodized,black,white
Application	Indoor
IP grade	IP20
Warranty	5 Years
Certification	Rohs,Reach

Structure Image

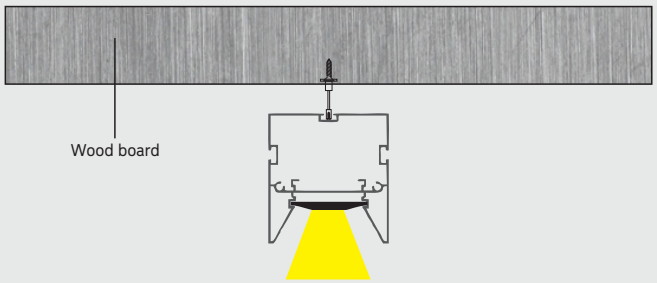

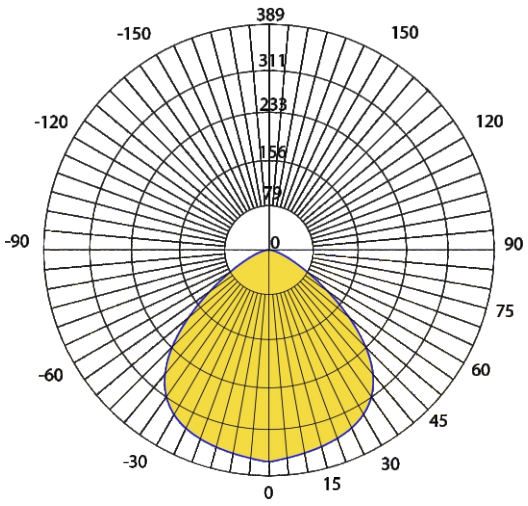



FREE COMBINATION PRODUCTS

PL188A

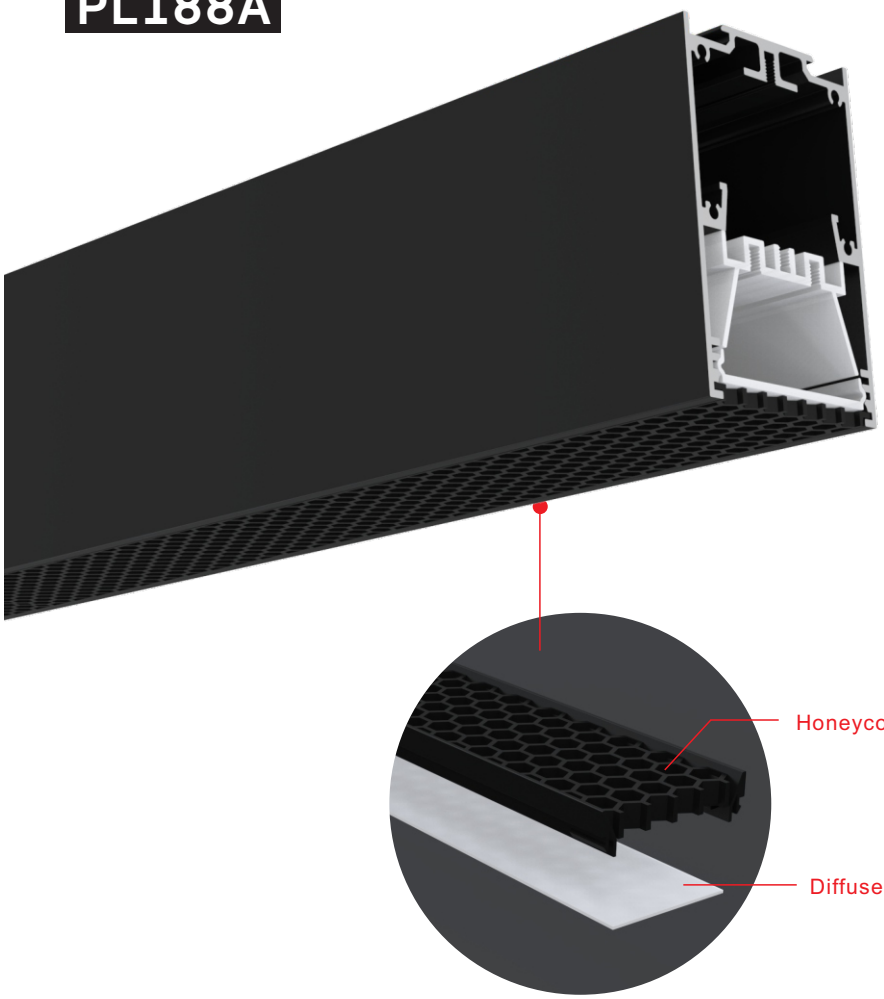



·Installation method

Cover: PC/PMMA/Clear/Milky

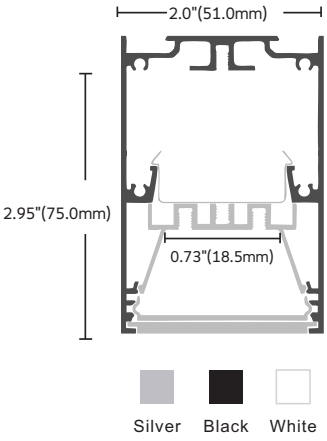



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector

FREE COMBINATION PRODUCTS

PL188B

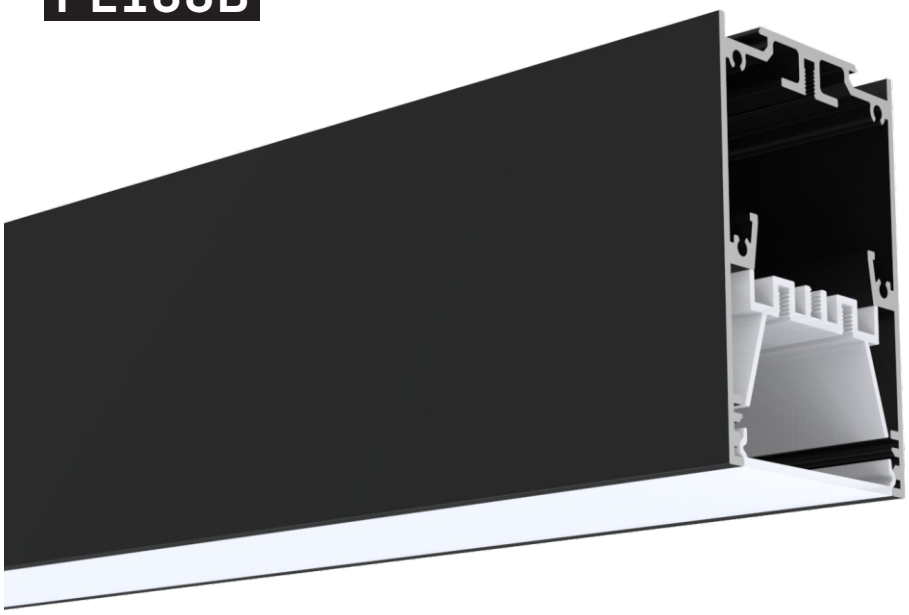

Cover: PC/PMMA/Clear/Milky

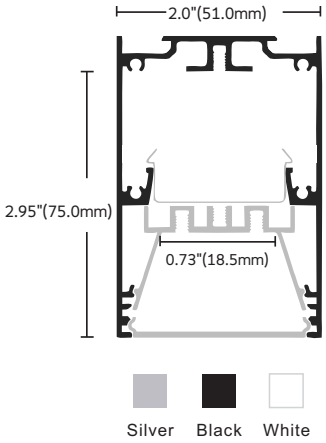

·Installation method





End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL189A

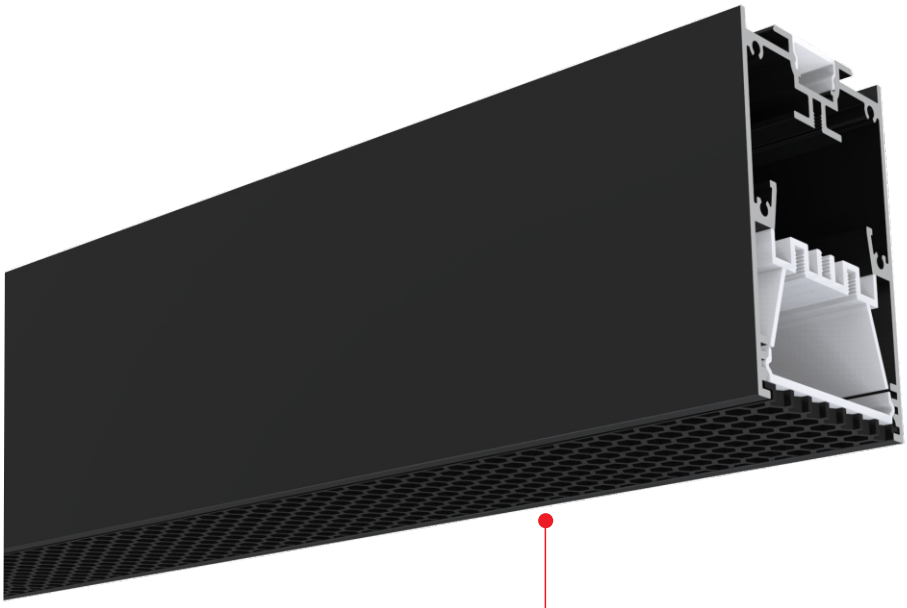

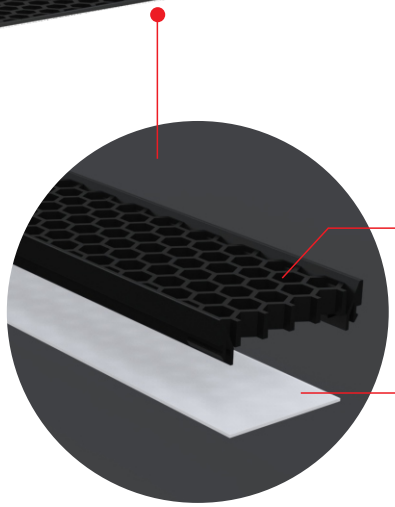



·Installation method

Cover: PC/PMMA/Clear/Milky

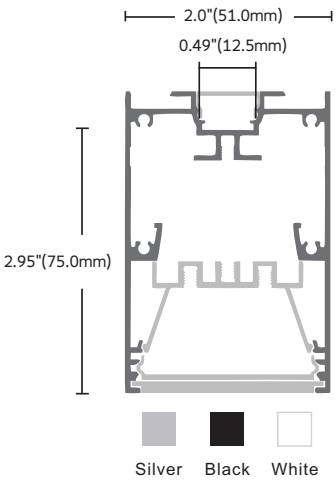



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector

FREE COMBINATION PRODUCTS

PL189B

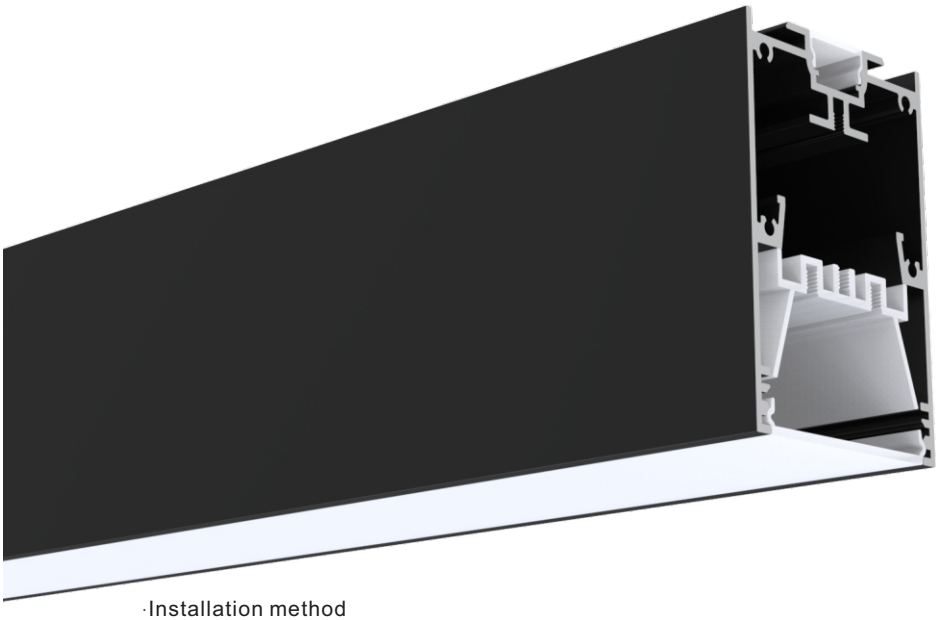

·Installation method



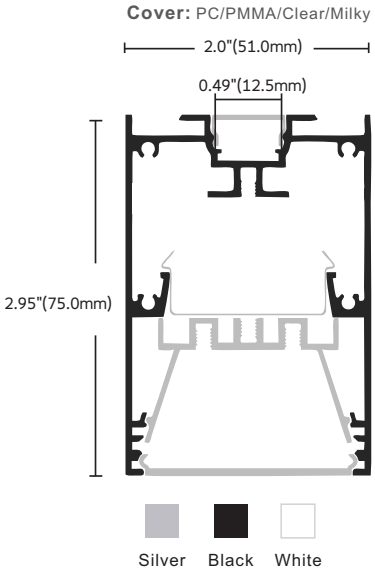



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector



Connector V



Connector L



Connector T



Connector X

FREE COMBINATION PRODUCTS

PL190A

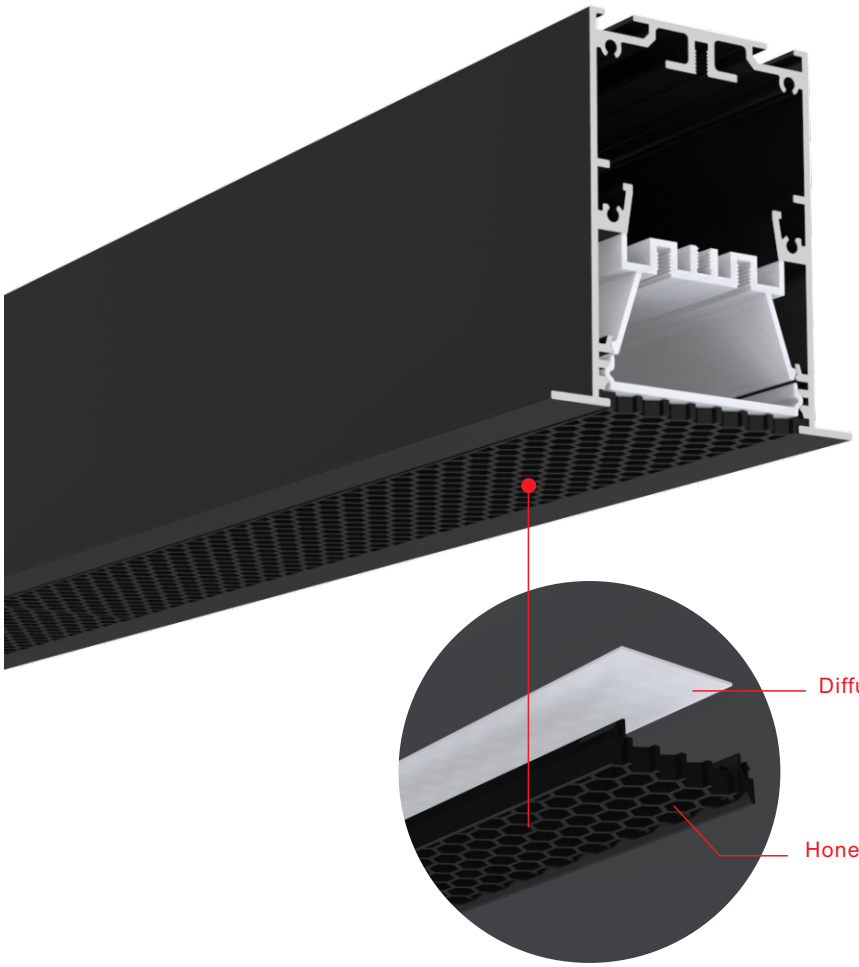



·Installation method

Cover: PC/PMMA/Clear/Milky

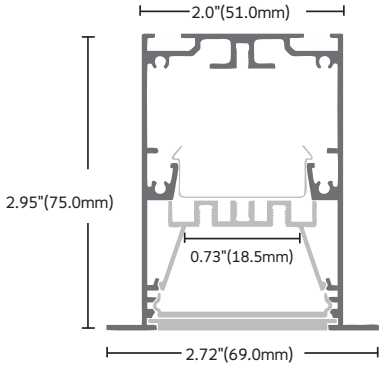

Silver Black White



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector

FREE COMBINATION PRODUCTS

PL190B

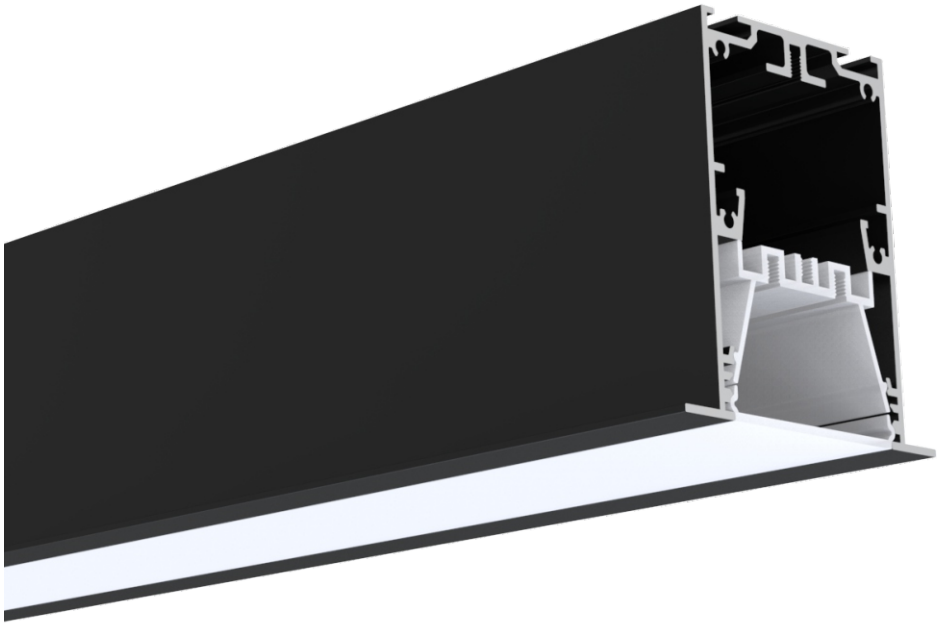

·Installation method



Cover: PC/PMMA/Clear/Milky

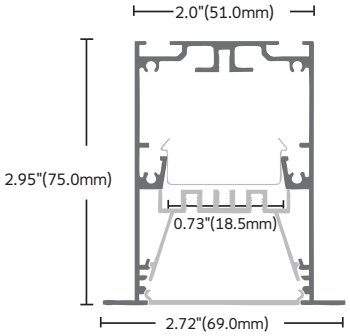

Silver Black White



End Caps



Black Silicone Strip



Magnet



Metallic Mounting Clips



Suspension Wire



Metallic Mounting Clips



180° Joining Connector



FREE COMBINATION PRODUCTS

PL162A

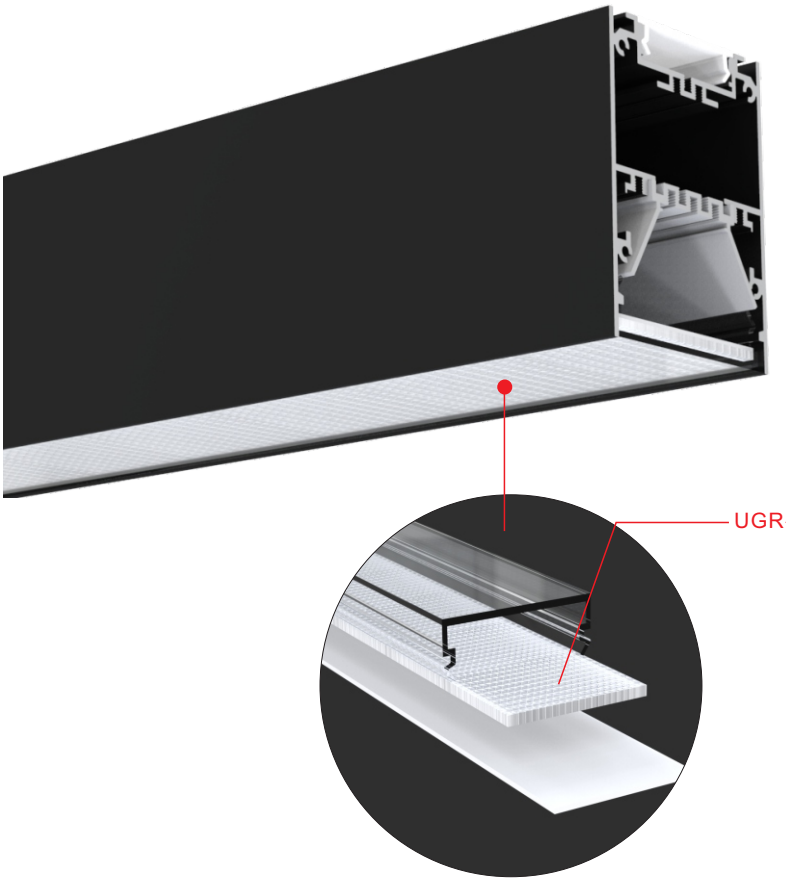



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162B

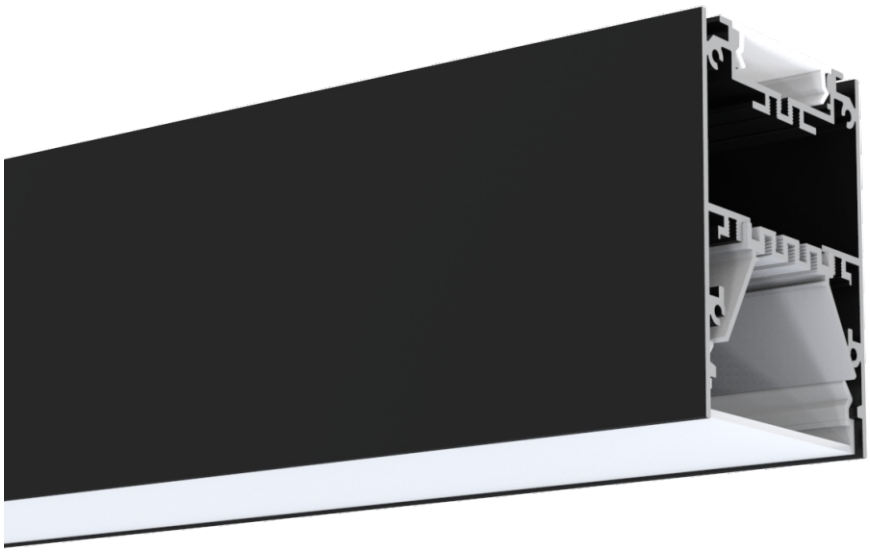



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162C

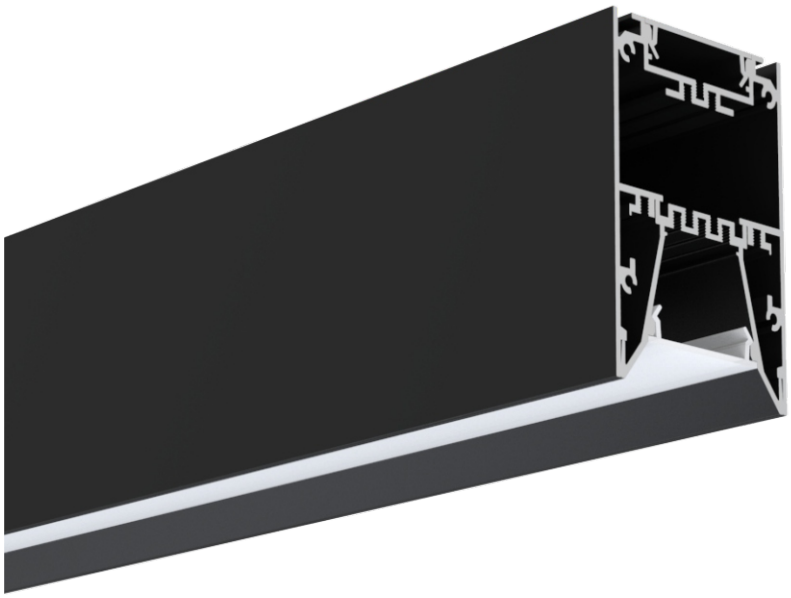



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162D

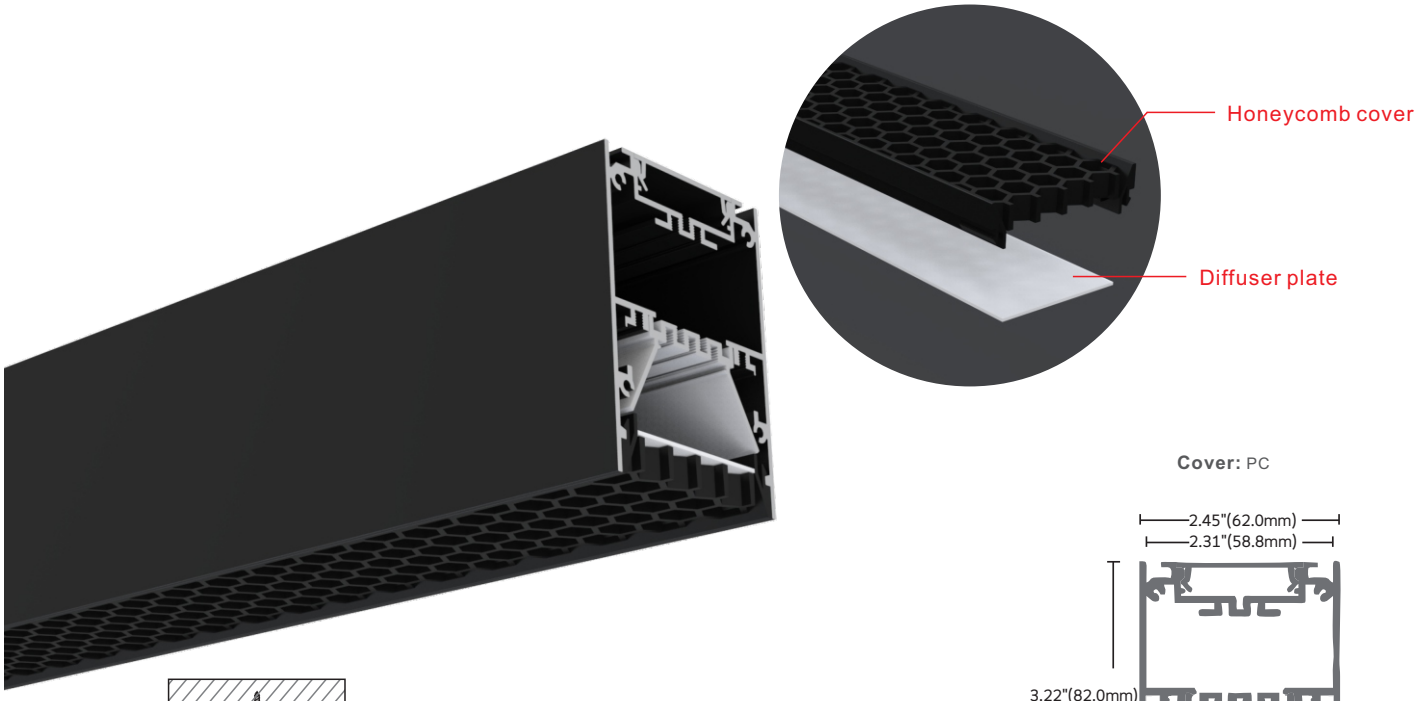



·Installation method

Cover: PC

Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162E

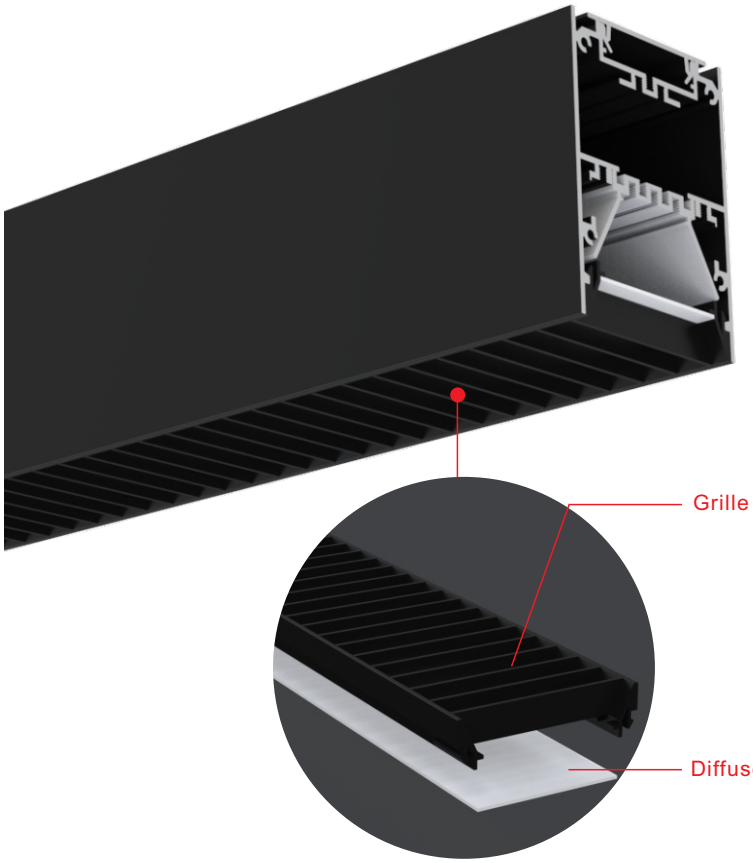



Installation method

Cover: PC





Silver Black White



Rotary buckle



Black silicone strip



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162F

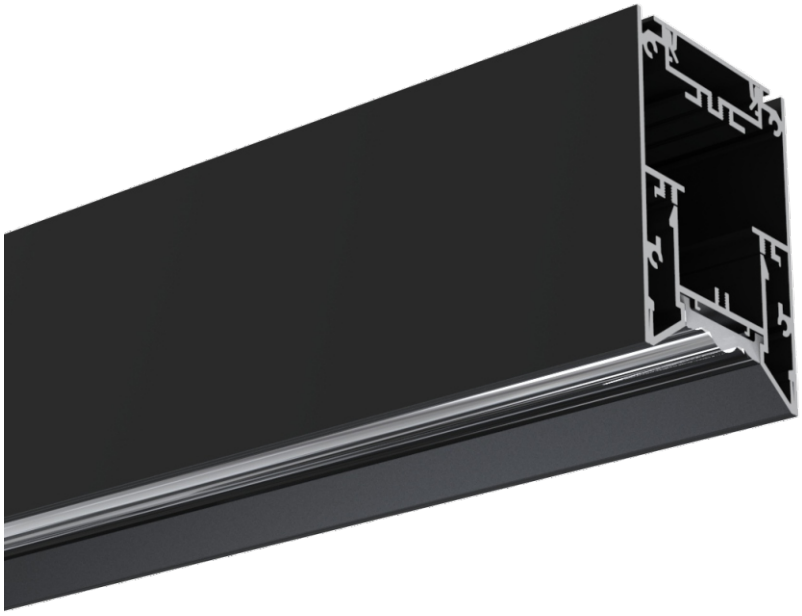

Cover: PC



Silver Black White

·Installation method

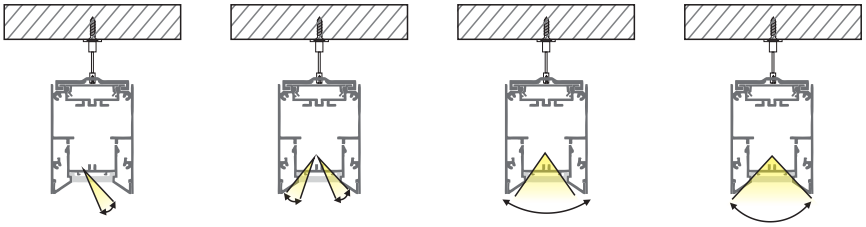

Unilateral15° Double bias15° 60° 90°



Black silicone strip



Rotary buckle



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL162G

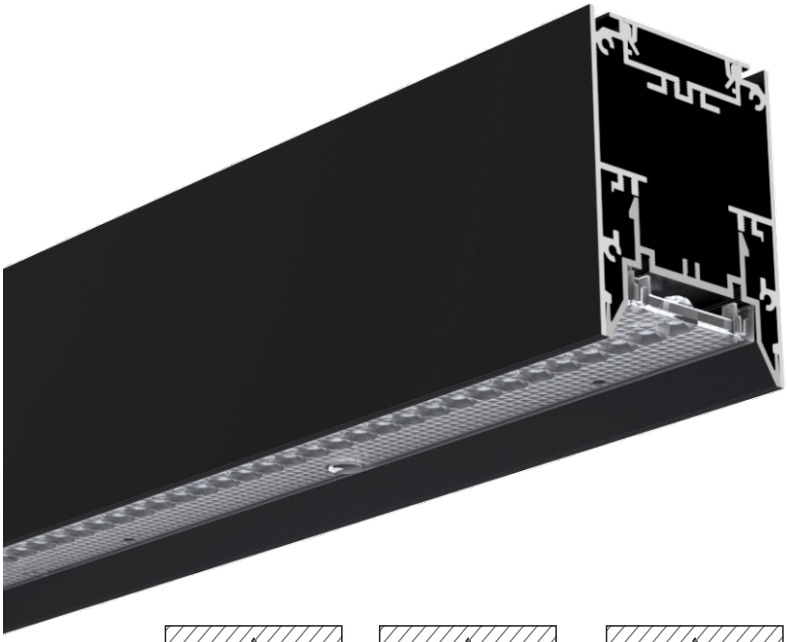

Cover: PC





·Installation method

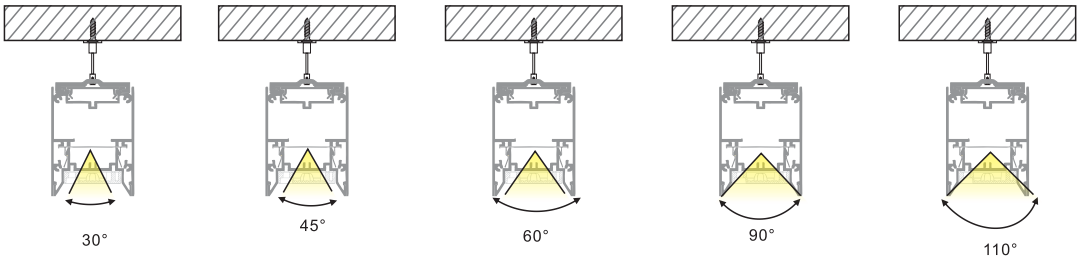



Black silicone strip



Rotary buckle



Metallic clips



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

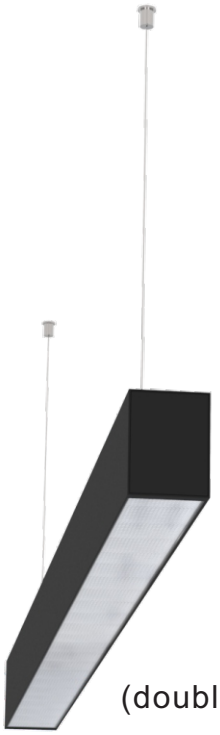

PL162A
(double-side illuminated)



PL162B
(double-side illuminated)



PL162D
(Single side illuminated)

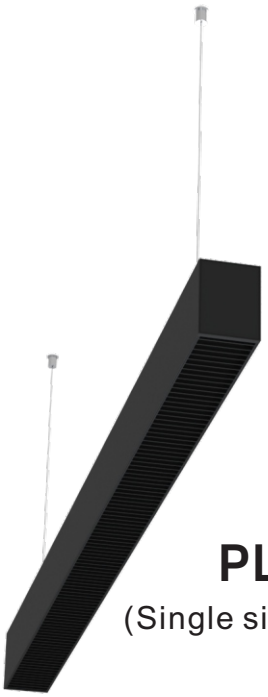

PL162E
(Single side illuminated)

FREE COMBINATION PRODUCTS

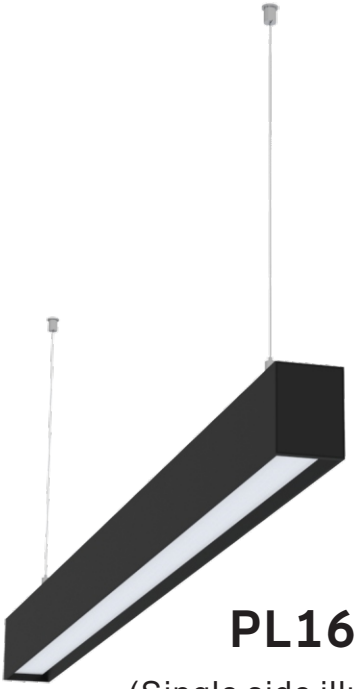

PL162C

(Single side illuminated)

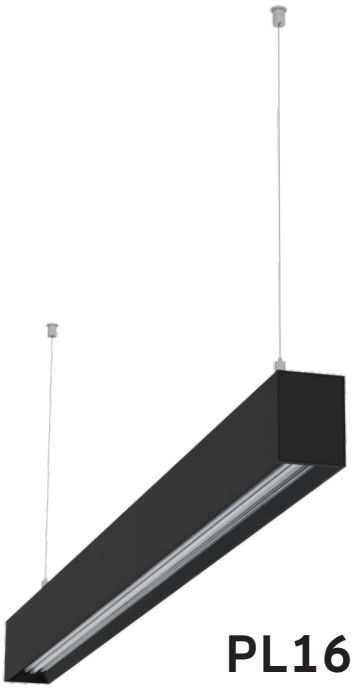

PL162F

(Single side illuminated)

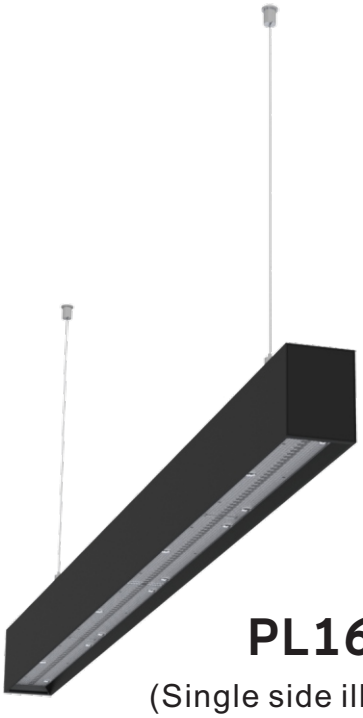

PL162G

(Single side illuminated)

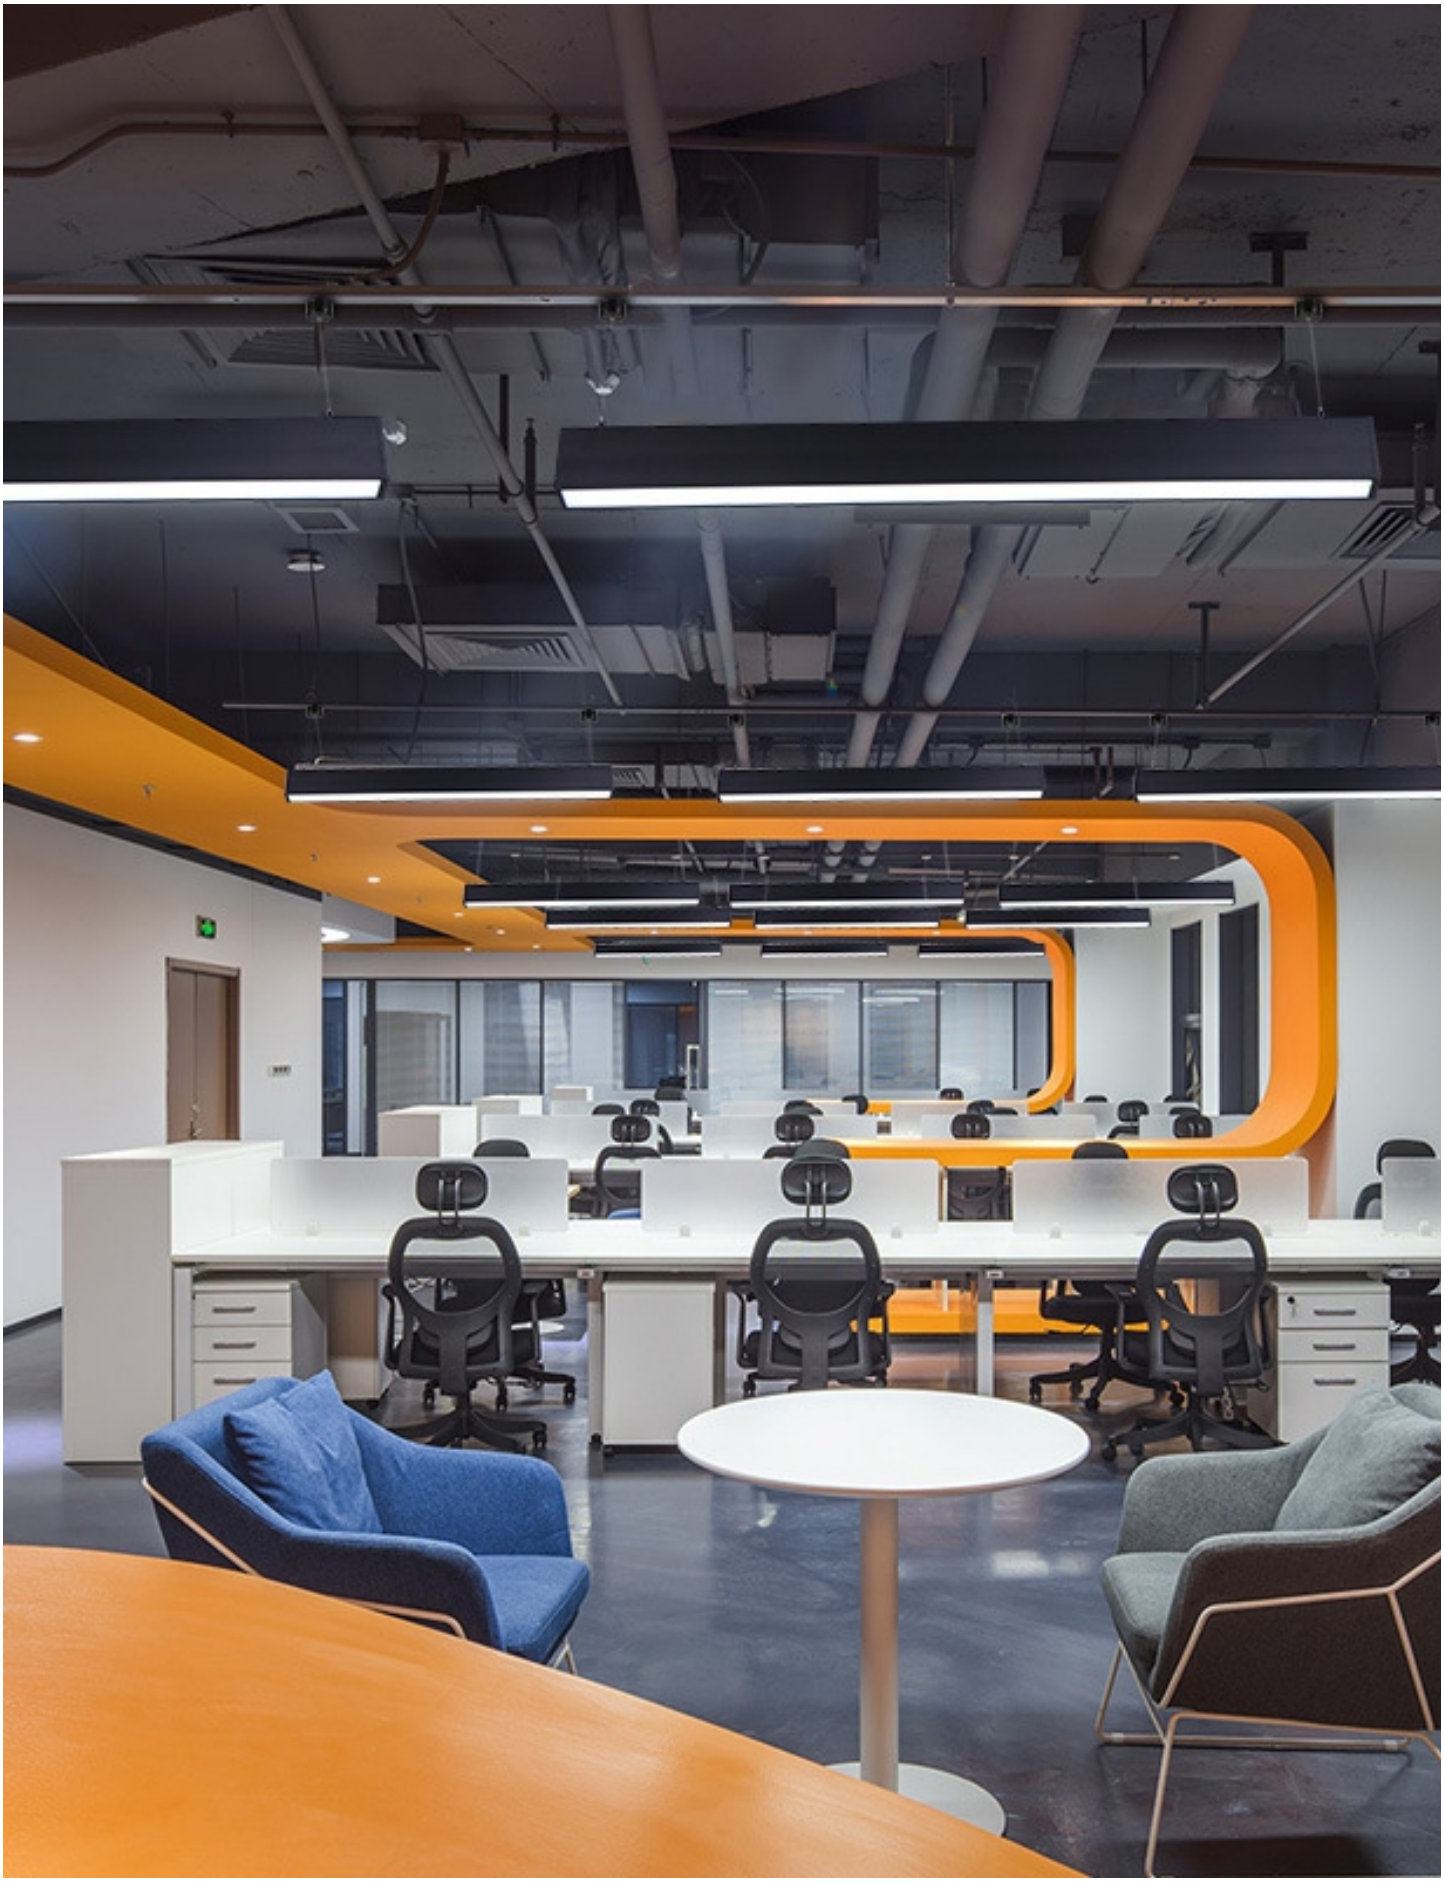

FREE COMBINATION PRODUCTS

PL163A

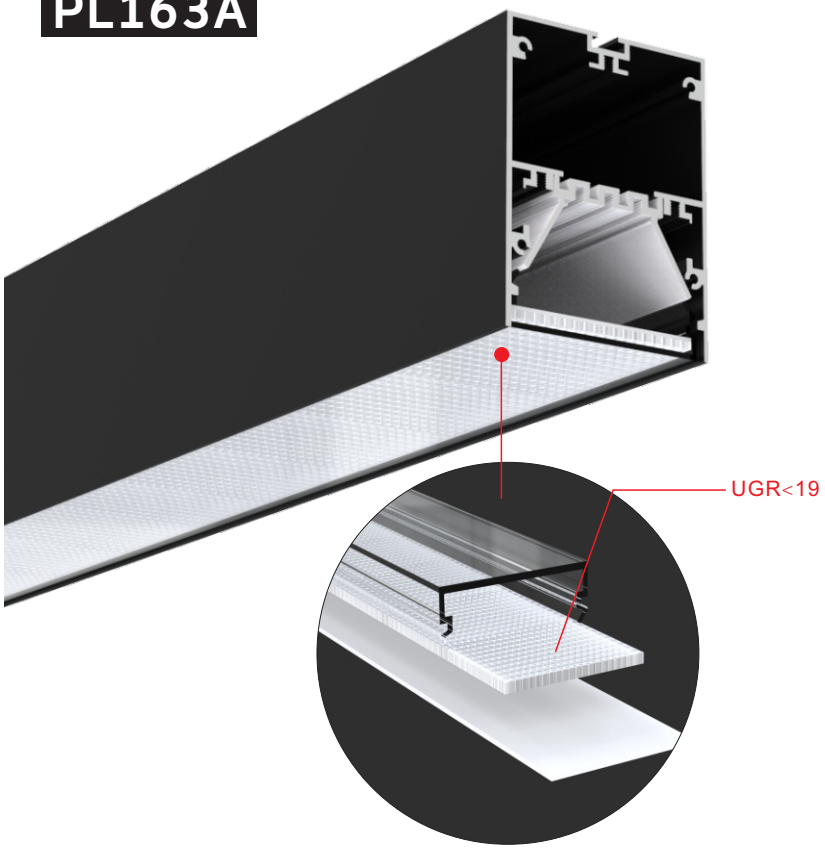



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163B

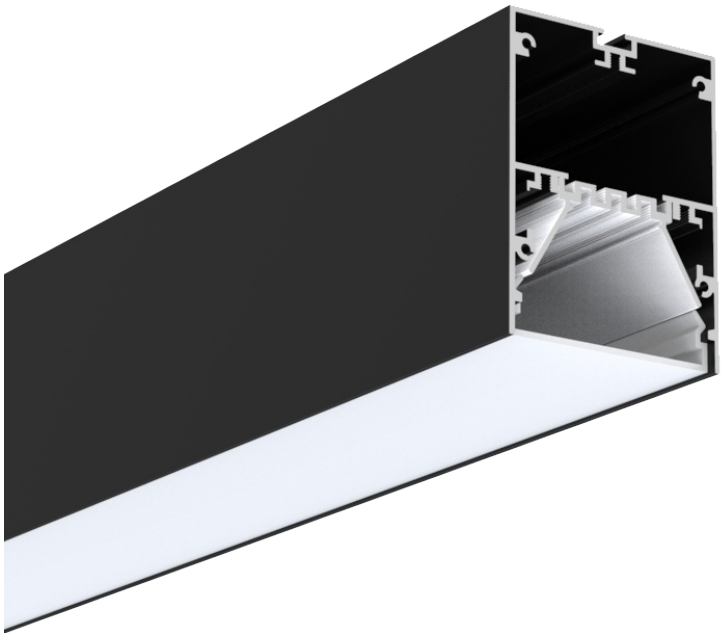



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163C

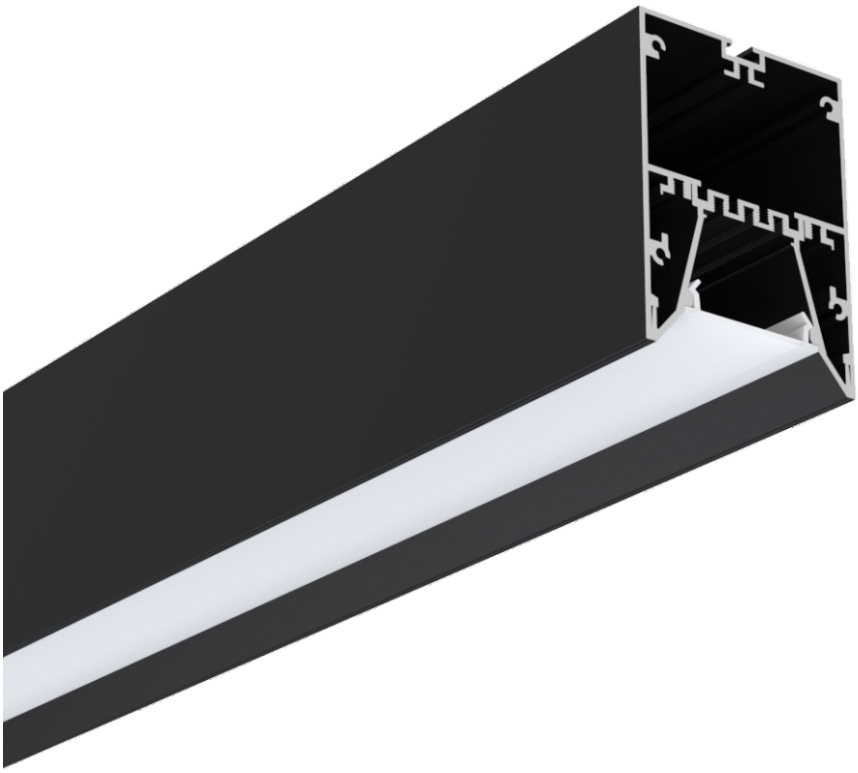



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163D

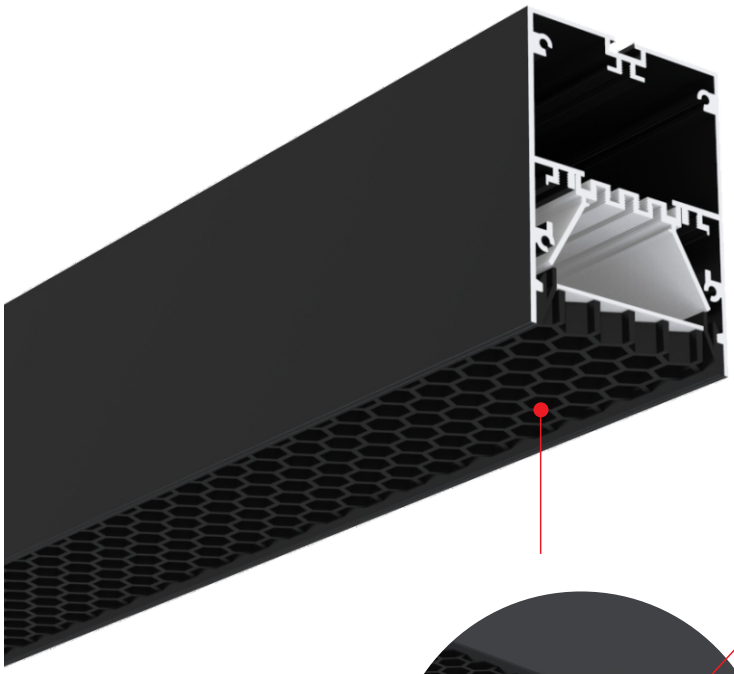



·Installation method

Cover: PC

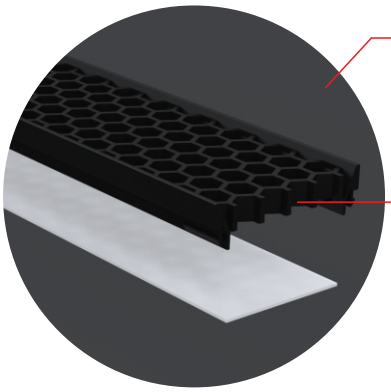



Silver Black White



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163E

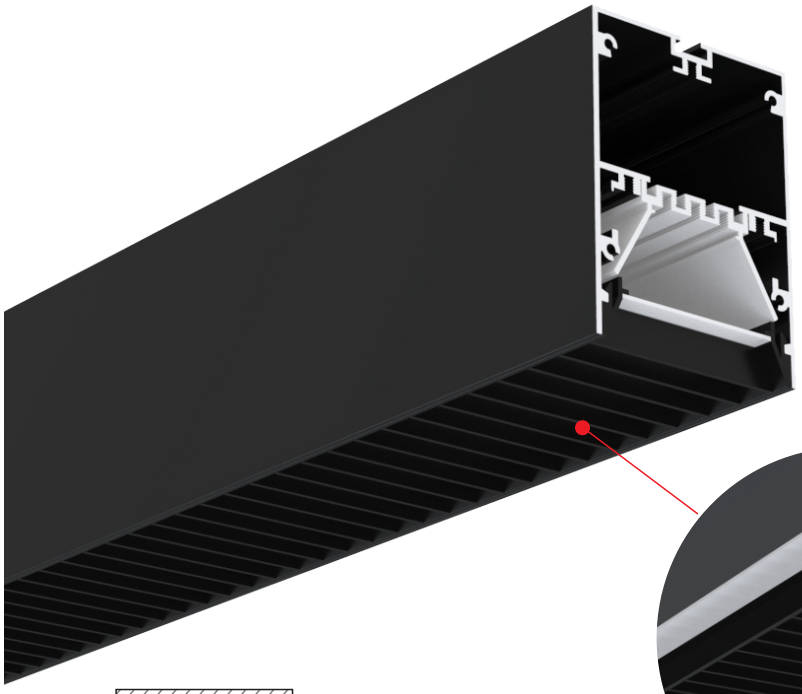

Cover: PC

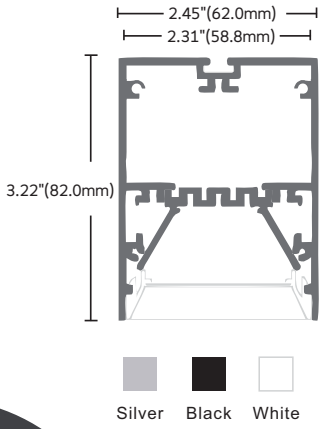

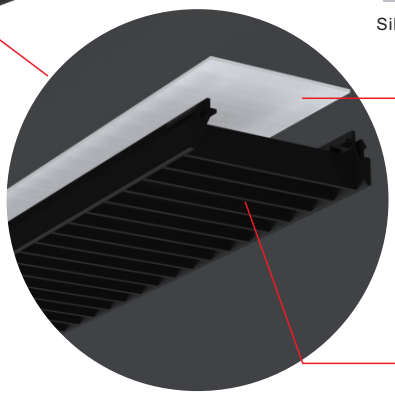



·Installation method



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163F

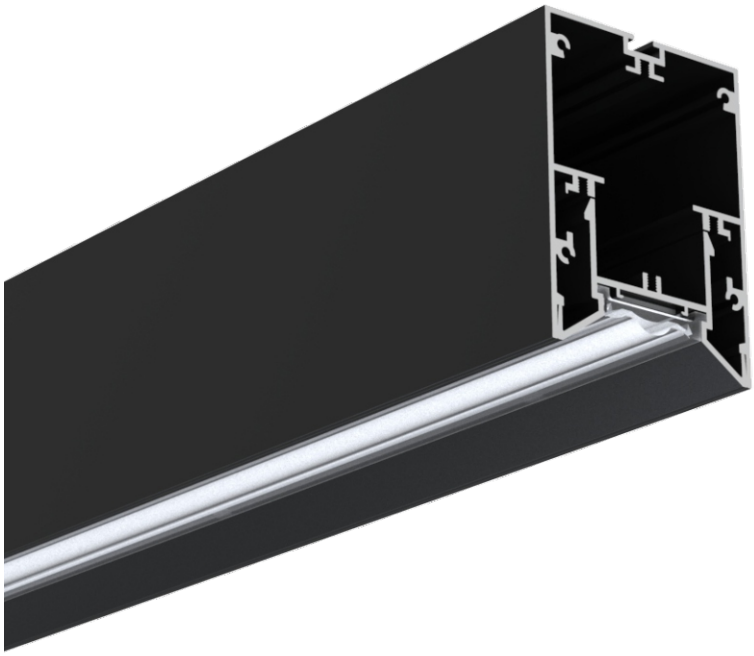

Cover: PC



Silver Black White

·Installation method

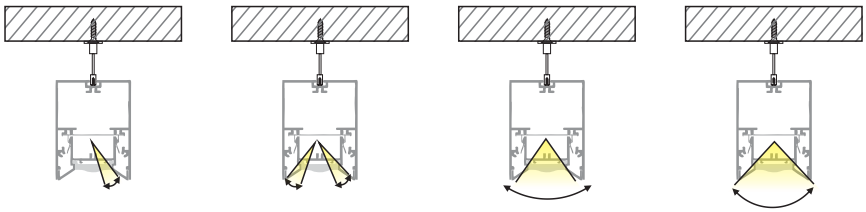

Unilateral15° Double bias15° 60° 90°



Black Silicone strip



Rotary buckle



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163G

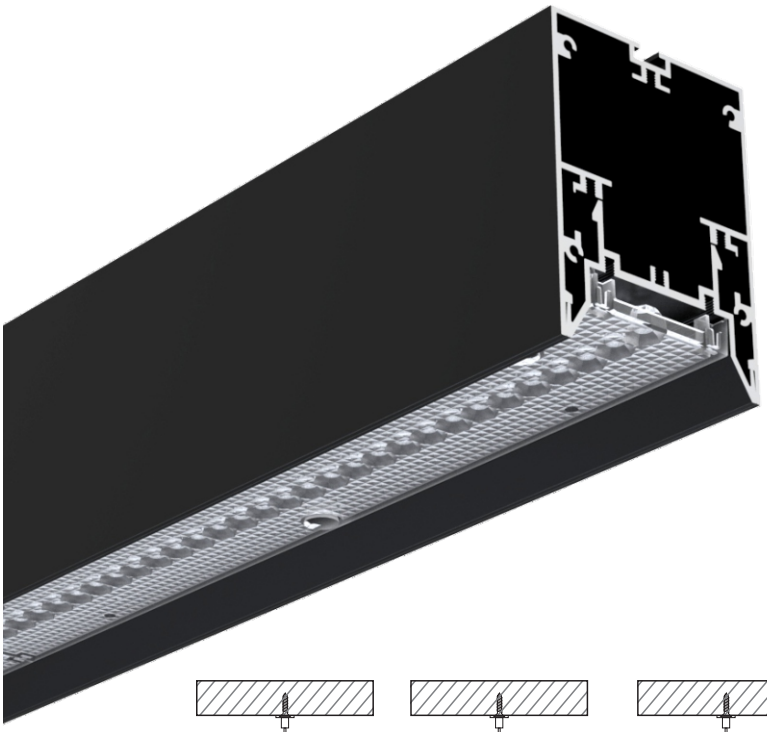

Cover: PC



Silver Black White

·Installation method

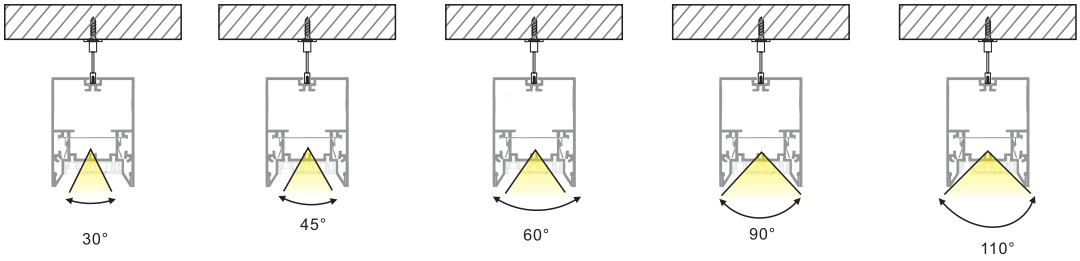



Black silicone strip



Rotary buckle



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163H

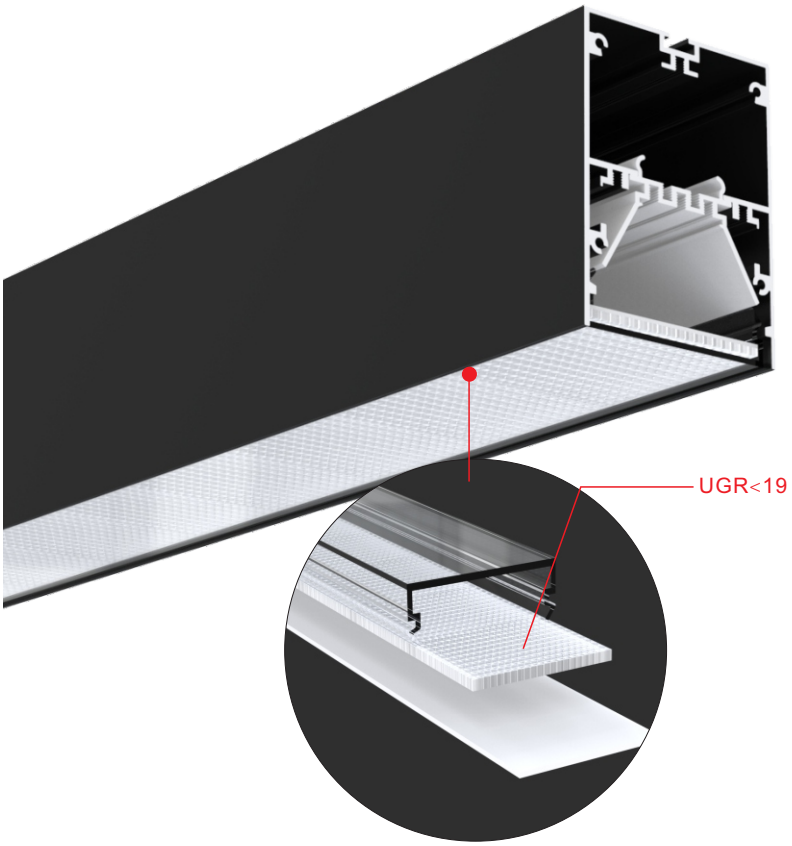



·Installation method

Cover: PC



Silver Black White



Rotary buckle



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

FREE COMBINATION PRODUCTS

PL163Ⅰ

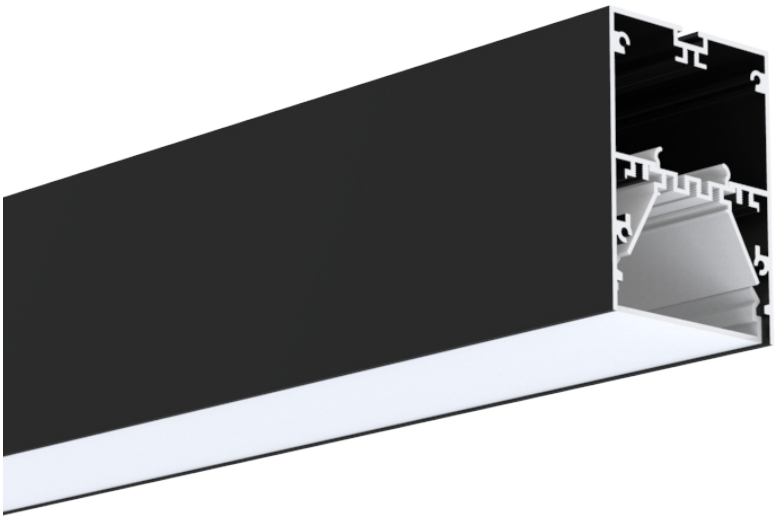



·Installation method

Cover: PC



Silver Black White



Black silicone strip



Safety rope



Suspension wire



180° joining connector



Light board



Power supply

Bending Series

Application





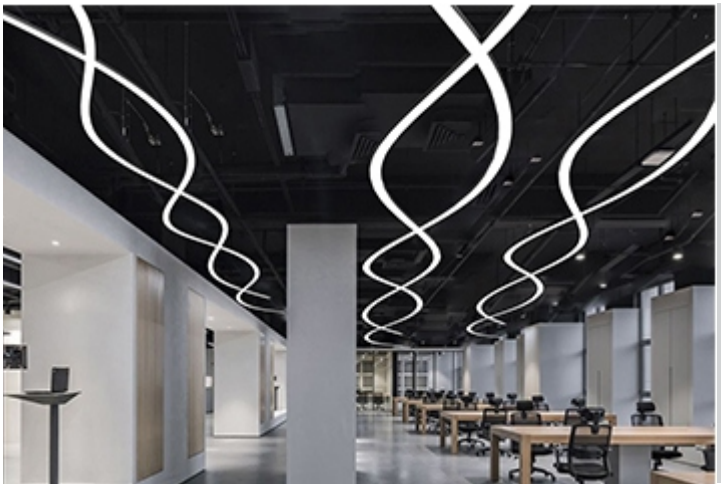





CIRCULAR BENDING SERIES

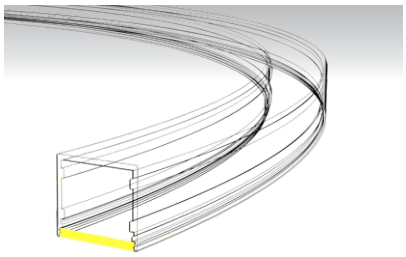

1 ONLY LIGHT DOWN

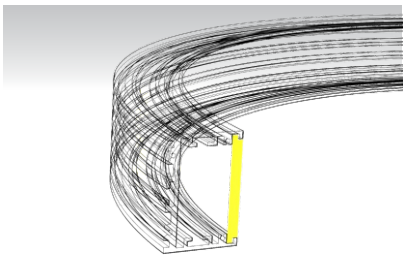

2 ONLY LIGHT RIGHT

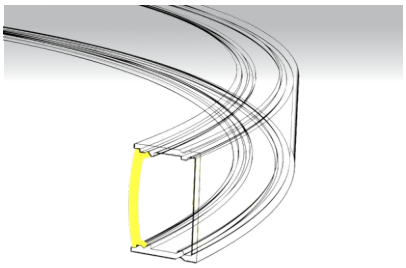

3 ONLY LIGHT LEFT

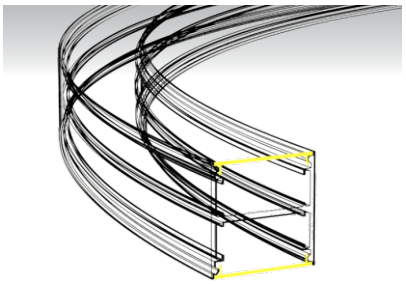

4 LIGHT UP AND DOWN

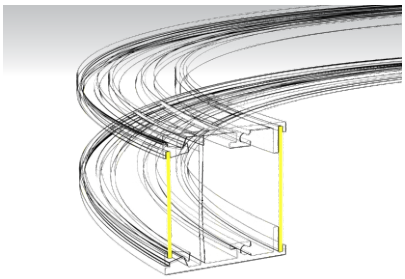

5 LIGHT LEFT AND RIGHT

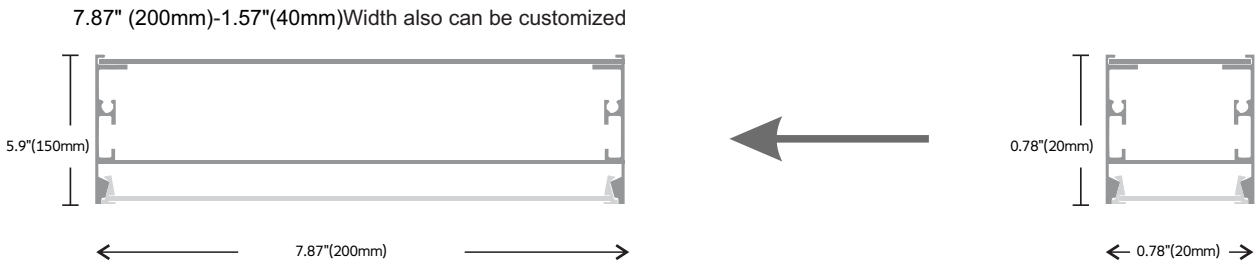

Both aluminum and PC cover are installed in combination,
with customized width and removable maintenance
Material length: 114.17"/137.79"/157.48"
Minimum bending radius: internal dimension R>4.72"
Lamp cover: PC cover



CL020



CL021



PL289



PL270



CL022



PL272



PL273

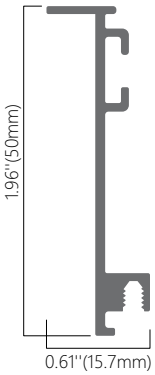

CL023

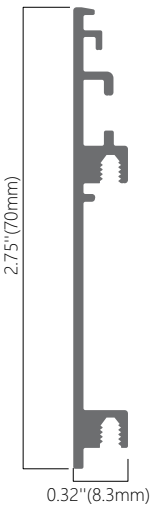

PL275

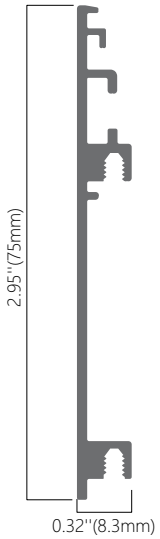

CL027



CL024

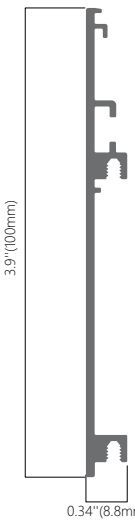

CL025



CL026

Can do 40/50/70/80/100/120MM Wide And Straight Splicing Various Shapes And Cutting With PC Cover

CL002

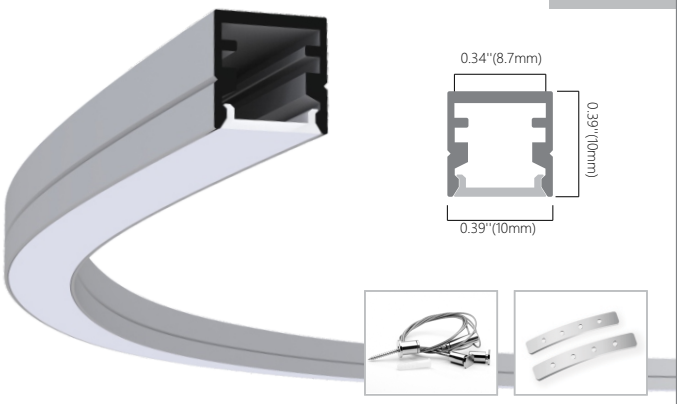

CL003

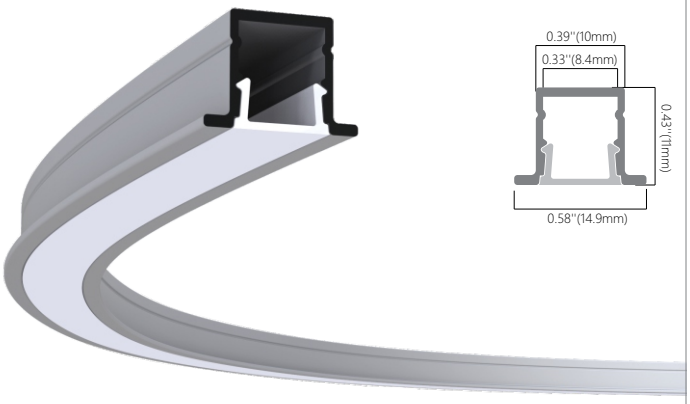

CL004

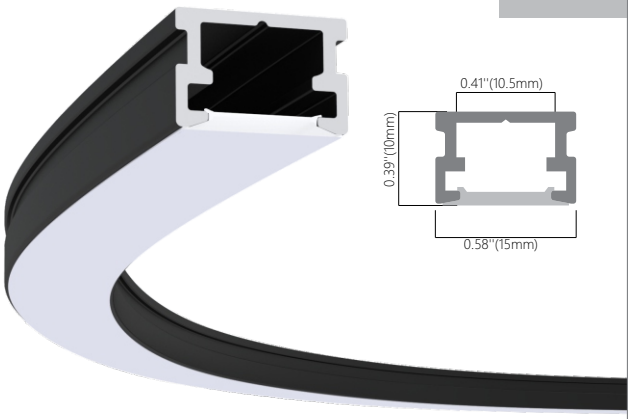

CL006

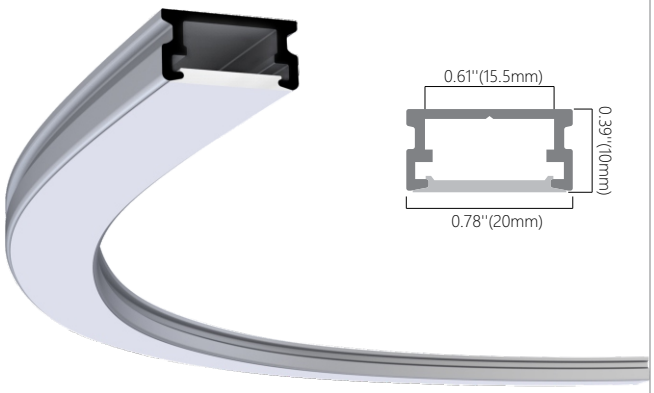

CL010

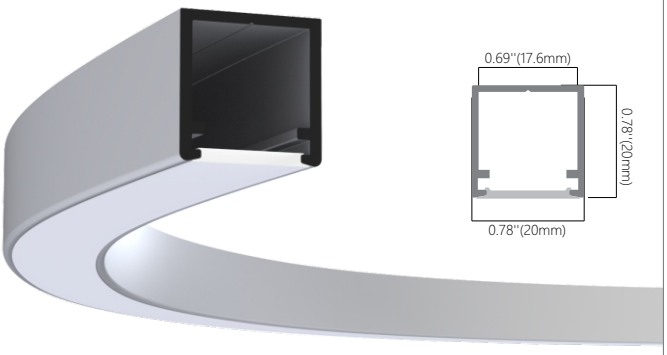

CL016





CL005

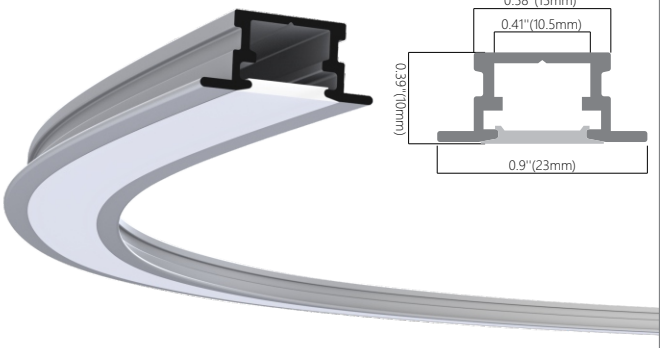

CL007

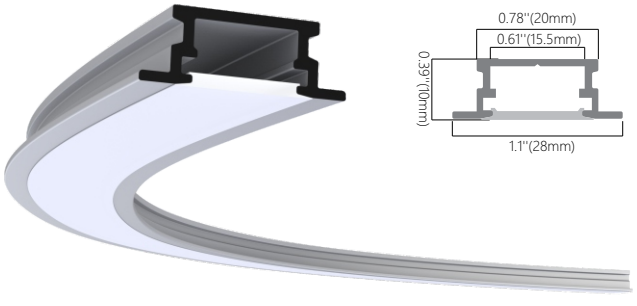

CL011

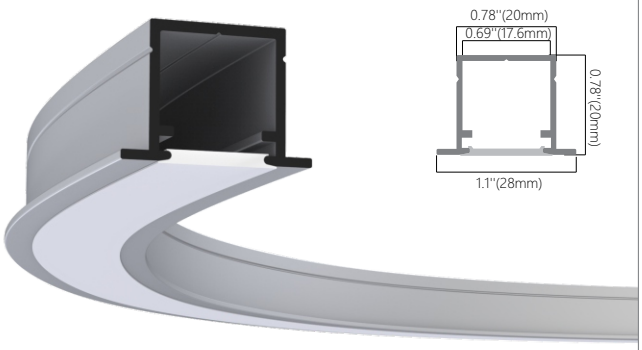

CL017

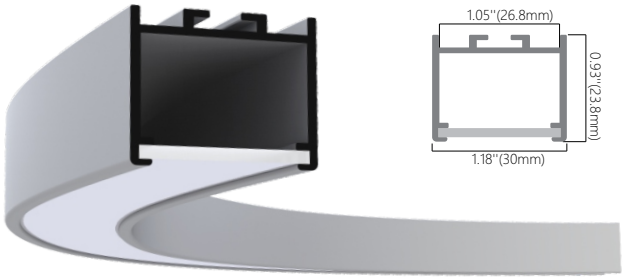

CL012

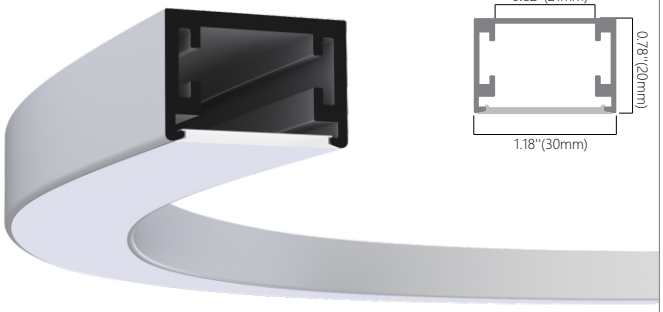

CL008

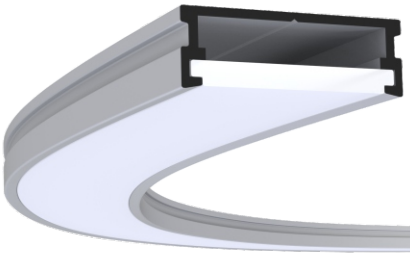



CL009

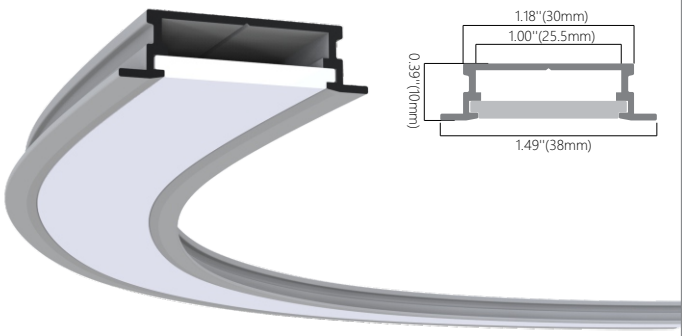

CL013

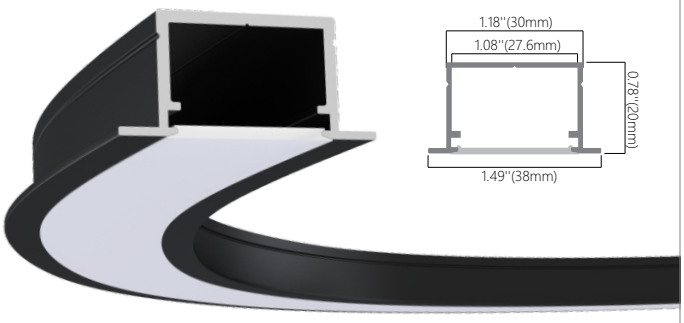

CL018

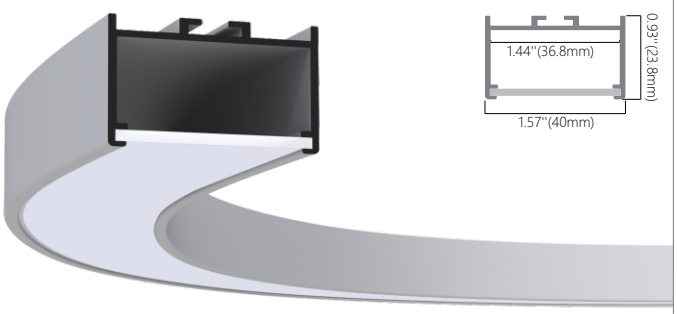

CL014

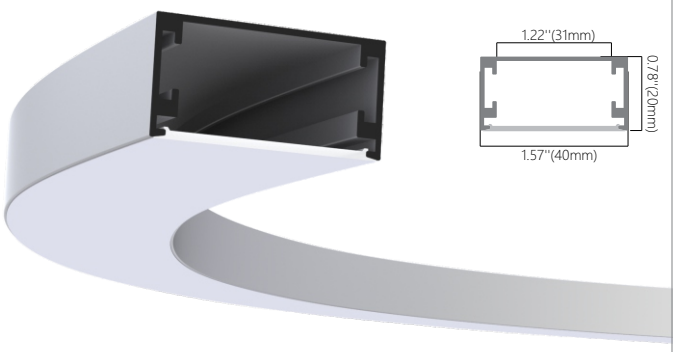

CL015

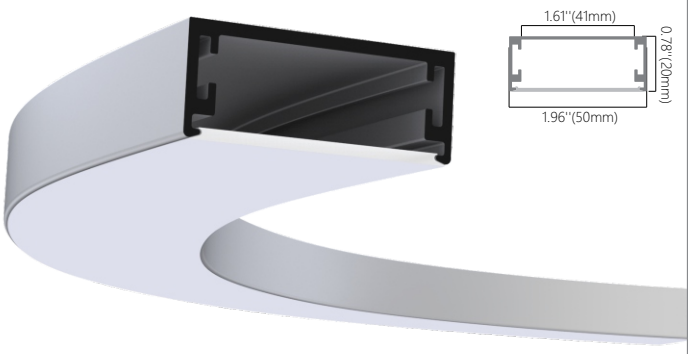

CL019

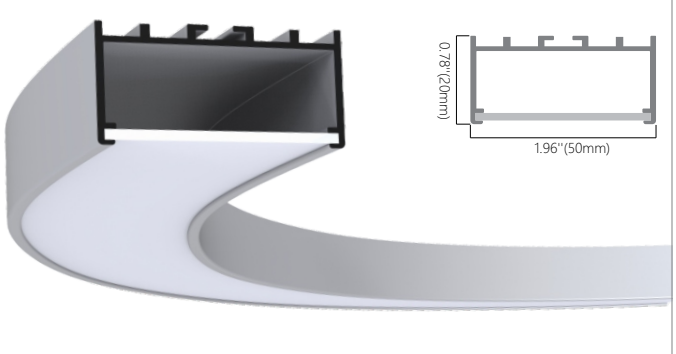





Projects

Airport







Metro Project

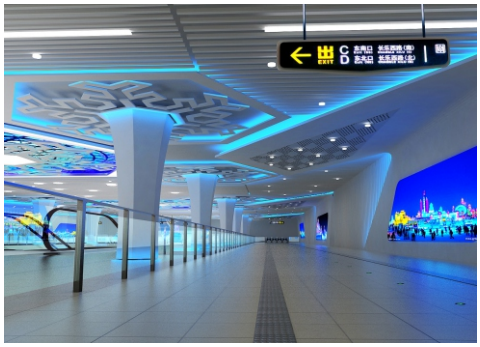











Supermarket







Business Office





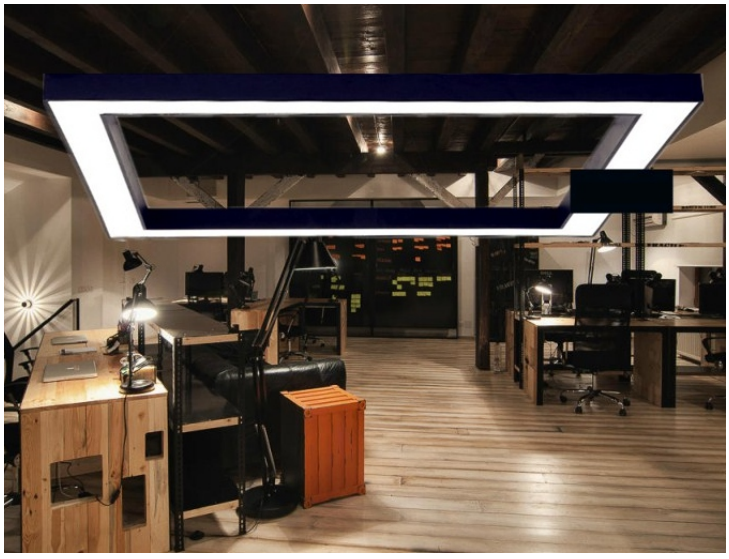








ULIFEI